

AN AMERICAN NATIONAL STANDARD

PIPE THREADS, GENERAL PURPOSE (INCH)

ANSI/ASME B1.20.1 - 1983

(REVISION AND REDESIGNATION OF ANSI B2.1-1968)

REAFFIRMED 1992

FOR CURRENT COMMITTEE PERSONNEL
PLEASE SEE ASME MANUAL AS-11

SPONSORED AND PUBLISHED BY

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

United Engineering Center

345 East 47th Street

New York, N. Y. 10017

ACCEPTANCE NOTICE

This non-Government document was adopted on 25 October 1984 and is approved for use by the Federal Agencies. The indicated industry group has furnished the clearance required by existing regulations. Copies of the document are stocked by the DoD Single Stock Point, Naval Publications and Forms Center, Philadelphia, PA 19120, for issue to DoD activities only. Contractors and industry groups must obtain copies directly from:

The American Society of Mechanical Engineers
345 East 47th Street
New York, New York 10017

or

The American National Standards Institute
1430 Broadway
New York, New York 10018

Title of Document: Pipe Threads, General Purpose (Inch)

Date of Specific Issue Adopted: 4 February 1983

Releasing Industry Group: The American Society of Mechanical Engineers

NOTICE: The Federal agencies use of this standard is subject to all the requirements and limitations of FED-STD-H28/7 Screw Thread Standards for Federal Services Section 7, Pipe Threads, General Purpose.

NOTICE: When reaffirmation, amendment, revision, or cancellation of this standard is initially proposed, the industry group responsible for this standard, shall inform the military coordinating activity or the proposed change and request participation.

Custodians:

Army – AR
Navy – AS
Air Force – 11

Civil Agency Coordinating Activities:

Commerce – NBS
DOT – ACO, APM, FAA, FRA, NHT
GSA – FSS, PCD
HUD – HCC
Justice – FPI
NASA – JFK, LRC, MSF
USDA – AFS

Review Activities:

Army – AT, GL, ME, MI
Navy – YD

Military Coordinating Activity: DLA – IS

(Project THDS-0052)

AREA THD

Date of Issuance: August 31, 1983

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Consensus Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment which provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable Letters Patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

FOREWORD

(This Foreword is not part of American National Standard, Pipe Threads, General Purpose (Inch) ANSI/ASME B1.20.1-1983.)

In 1973 American National Standards Committee B2, which had formerly been responsible for pipe thread standards, was absorbed by ANSI Standards Committee B1 and reorganized as subcommittee 20. A complete rewrite of the B2.2-1968 standard on Dryseal Pipe Threads has been completed, with the product thread data in separate documents from the gaging standards for Dryseal Pipe Threads. The system of numbering, to include metric conversions, is as follows:

ANSI B1.20.3-1976 Dryseal Pipe Threads (Inch)
ANSI B1.20.4-1976 Dryseal Pipe Threads (Metric Translation)
ANSI B1.20.5-1978 Gaging for Dryseal Pipe Threads (Inch)
In preparation, B1.20.6M Gaging for Dryseal Pipe Threads (Metric Translation)

A complete rewrite of the B2.1-1968 standard on Pipe Threads (Except Dryseal) was then undertaken. The system of numbering, to include metric conversions, is as follows:

ANSI/ASME B1.20.1 Pipe Threads, General Purpose (Inch)
In preparation, B1.20.2M Pipe Threads, General Purpose (Metric Translation)

These standards, ANSI/ASME B1.20.1 and B1.20.2M, have product thread dimensions and gaging in the same document. Thread inspection specifies the use of L_1 taper thread plug and ring gages similar to B2.1-1968. In addition, emphasis is given to the requirement that all basic thread design dimensions are to be met within the specified tolerances.

The data in this Standard supersede those given in ANSI B2.1-1968.

The ANSI/ASME B1.20.1 was approved by ASME Standards Committee B1 on December 1, 1982 for publication as an official ANSI standard.

The proposed standard was submitted by standards committee B1 to the Secretariat and the American National Standards Institute. It was approved and formally designated as an American National Standard on February 4, 1983.

ASME STANDARDS COMMITTEE B1

Standardization and Unification of Screw Threads

(The following is the roster of the Committee at the time of approval of this Standard.)

OFFICERS

D. J. Emanuelli, *Chairman* **H. W. Ellison, *Vice Chairman***
C. E. Lynch, *Secretary*

COMMITTEE PERSONNEL

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.

G. G. Gerber, McDonnell Douglas, St. Louis, Missouri
H. Borrmann, *Alternate*, Sperry Gyroscope Division, Great Neck, New York

AMERICAN IRON AND STEEL INSTITUTE

F. Dallas, Jr., Sawhill Tubular Division, Sharon, Pennsylvania

AMERICAN MEASURING TOOL MANUFACTURERS ASSOCIATION

D. Dodge, Penneyer-Dodge Company, Glendale, California
C. W. Jatho, *Alternate*, American Measuring Tool Manufacturers Association, Birmingham, Michigan

AMERICAN PIPE FITTINGS ASSOCIATION

W. C. Farrell, Stockham Valves and Fittings, Birmingham, Alabama

DEFENSE INDUSTRIAL SUPPLY CENTER

E. Schwartz, Defense Industrial Supply Center, Philadelphia, Pennsylvania
F. S. Ciccarone, *Alternate*, Defense Industrial Supply Center, Philadelphia, Pennsylvania

ENGINE MANUFACTURERS ASSOCIATION

G. A. Russ, Cummins Engine Company, Columbus, Indiana

FARM AND INDUSTRIAL EQUIPMENT INSTITUTE

J. F. Nagy, Ford Motor Company, Dearborn, Michigan

INDUSTRIAL FASTENERS INSTITUTE

R. B. Belford, Industrial Fasteners Institute, Cleveland, Ohio
R. M. Harris, Bethlehem Steel Company, Lebanon, Pennsylvania
K. E. McCullough, SPS Technologies, Inc., Jenkintown, Pennsylvania
J. C. McMurray, Russell, Burdsall and Ward Inc., Mentor, Ohio
J. A. Trilling, Holo-Krome Company, West Hartford, Connecticut
E. D. Spengler, *Alternate*, Bethlehem Steel Company, Lebanon, Pennsylvania

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTING INDUSTRY

W. C. Farrell, Stockham Valves and Fittings, Birmingham, Alabama

METAL CUTTING TOOL INSTITUTE (TAP & DIE DIVISION)

N. F. Nau, Union/Butterfield, Athol, Massachusetts
A. D. Shepherd, Jr., *Alternate*, Union/Butterfield, Derby Line, Vermont

NATIONAL AUTOMATIC SPRINKLER AND FIRE CONTROL ASSOCIATION, INC.

W. Testa, Grinnell Fire Protection Systems Company, Inc., Providence, Rhode Island

R. P. Fleming, *Alternate*, National Automatic Sprinkler and Fire Control Association, Inc., Patterson, New York

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION

J. L. Griffin, Wheatland Tube Company, Wheatland, Pennsylvania

J. B. Levy, General Electric Company, Schenectady, New York

F. F. Weingruber, Westinghouse Electric Corp., Pittsburgh, Pennsylvania

W. R. Williford, *Alternate*, National Electrical Manufacturers Association, Washington, D.C.

NATIONAL MACHINE TOOL BUILDERS ASSOCIATION

R. J. Sabatos, The Cleveland Twist Drill Company, Cleveland, Ohio

D. R. Stoner, Jr., Teledyne Landis Machine, Waynesboro, Pennsylvania

NATIONAL SCREW MACHINE PRODUCTS ASSOCIATION

T. S. Meyer, Fischer Special Manufacturing Company, Cold Spring, Kentucky

H. A. Eichstaedt, *Alternate*, National Screw Machine Products Association, Brecksville, Ohio

SOCIETY OF AUTOMOTIVE ENGINEERS

H. W. Ellison, General Motors Technical Center, Warren, Michigan

SOCIETY OF MANUFACTURING ENGINEERS

D. Davidson, Morse/Hemco Corp., Holland, Michigan

TUBULAR RIVET AND MACHINE INSTITUTE

R. M. Byrne, Industry Service Bureaus, Inc., White Plains, New York

UNITED STATES DEPARTMENT OF THE AIR FORCE

R. P. Stewart, Wright-Patterson AFB, Dayton, Ohio

UNITED STATES DEPARTMENT OF THE ARMY

J. Crowley, U.S. Army Material Development and Readiness Command, Alexandria, Virginia

F. J. Clas, Watervliet Arsenal, Watervliet, New York

F. L. Jones, *Alternate*, U. S. Army Missile Command, Redstone Arsenal, Alabama

UNITED STATES DEPARTMENT OF DEFENSE

E. Schwartz, Defense Industrial Supply Center, Philadelphia, Pennsylvania

UNITED STATES DEPARTMENT OF THE NAVY

C. T. Gustafson, Portsmouth Naval Shipyard, Portsmouth, New Hampshire

INDIVIDUAL MEMBERS

C. T. Appleton, Jefferson, Massachusetts

D. N. Badgley, Clark Equipment Company, Battle Creek, Michigan

J. Boehnlein, PMC Industries, Wickliffe, Ohio

W. E. Bour, Santa Monica, California

A. R. Breed, Mechanical Fasteners and Assembly, Lakewood, Ohio

R. Browning, Southern Gage Company, Erin, Tennessee

A. Butovich, Air Industries Corp., Garden Grove, California

R. S. Chamerda, The Johnson Gage Company, Bloomfield, Connecticut

J. F. Cramer, Des Moines, Washington

J. F. Dickson, Reed Rolled Thread Die Company, Holden, Massachusetts

R. B. Donahue, Xerox Corp., Webster, New York

E. W. Drescher, Lancaster, Pennsylvania

D. J. Emanuelli, Greenfield Tap and Die, Greenfield, Massachusetts

C. G. Erickson, Colt Industries, Sterling Die Operation, West Hartford, Connecticut

S. I. Kanter, The Hanson-Whitney Company, Hartford, Connecticut

R. W. Lampert, The Van Keuren Company, Watertown, Massachusetts

A. R. Machell, Jr., Xerox Corp., Rochester, New York

A. E. Masterson, Watervliet, New York

R. E. Mazzara, Geometric Tool, New Haven, Connecticut

H. G. Muenchinger, Westerly, Rhode Island

P. V. Pastore, Regal Beloit Corp., South Beloit, Illinois
M. M. Schuster, Hi-Shear Corp., Torrance, California
A. G. Strang, Boyds, Maryland
L. R. Strang, Caterpillar Tractor Company, Peoria, Illinois
A. F. Thibodeau, Swanson Tool Manufacturing, Inc., West Hartford, Connecticut
J. Turton, The Bendix Corp., Greenfield, Massachusetts

PERSONNEL OF SUBCOMMITTEE B1.20 – PIPE THREADS

D. N. Badgley, *Chairman*, Clark Equipment Company, Battle Creek, Michigan
W. A. Keaton, *Vice-Chairman*, General Motors Technical Center, Warren, Michigan
J. S. Hinske, *Secretary*, Parker-Hannifin Corp., Worcester, Massachusetts
C. Banks, Naval Sea System Command, Washington, D.C.
M. Bibeau, Jamesbury Corp., Worcester, Massachusetts
R. J. Browning, Southern Gage Company, Erin, Tennessee
D. Cadieux, TRW/Greenfield Tap & Die Division, Greenfield, Massachusetts
J. A. Casner, Hydril Technology Center, Houston, Texas
W. O. Clinedinst, Belleair, Florida
W. R. Cochran, J&L Steel Corp., Aliquippa, Pennsylvania
F. Dallas, Jr., Sawhill Tubular Division, Cyclops Corporation, Sharon, Pennsylvania
D. Davidson, Morse/Hemco Corp., Holland, Michigan
D. Dodge, Pennoyer-Dodge Company, Glendale, California
W. C. Farrell, Jr., Stockham Valves & Fittings, Birmingham, Alabama
L. S. Feldheim, The Weatherhead Company, Cleveland, Ohio
A. C. Flanders, Picoma Industries, Inc., Martins Ferry, Ohio
W. A. Franz, U. S. Steel Corp., Pittsburgh, Pennsylvania
H. D. Goldberg, Allied Tube & Conduit Corp., Harvey, Illinois
W. E. Hay, The Pipe Machinery Company, Wickliffe, Ohio
S. I. Kanter, The Hanson-Whitney Company, Hartford, Connecticut
G. K. Otten, Wheeling Machine Products Company, Wheeling, West Virginia
R. S. Piotrowski, Mack Trucks, Inc., Allentown, Pennsylvania
G. Russ, Cummins Engine Company, Inc., Columbus, Indiana
A. D. Shepherd, Jr., Litton Union/Butterfield, Derby Line, Vermont
A. G. Strang, Boyds, Maryland
J. Turton, The Bendix Corp., Inc., Greenfield, Massachusetts

CONTENTS

Foreword	iii
Standards Committee Roster	iv
 1 Introduction	 1
1.1 Scope	1
1.2 Thread Designations	1
1.3 Sealing	1
1.4 Inspection	1
1.5 Appendix	1
1.6 Related Standard	1
 2 American National Standard Pipe Thread Form	 4
2.1 Thread Form	4
2.2 Angle of Thread	4
2.3 Truncation and Thread Height	4
 3 Specification for General Purpose Taper Pipe Threads, NPT	 4
3.1 Taper Pipe Threads	4
3.2 Tolerances	9
 4 Specifications for Internal Straight Threads in Pipe Couplings, NPSC	 9
4.1 Straight Pipe Threads in Pipe Couplings	9
 5 Specifications for Railing Joint Taper Pipe Threads, NPTR	 9
5.1 Railing Joints	9
 6 Specifications for Straight Pipe Threads for Mechanical Joints; NPSM, NPSL, NPSH	 13
6.1 Straight Pipe Threads	13
6.2 Free-Fitting Mechanical Joints for Fixtures, NPSM	13
6.3 Loose-Fitting Mechanical Joints With Locknuts, NPSL	13
6.4 Loose-Fitting Mechanical Joints for Hose Coupling, NPSH	16
 7 Gages and Gage Tolerances for American National Standard Pipe Threads	 16
7.1 Design of Gages	16
7.2 Classes of Gages	16
7.3 Gage Tolerances	18
7.4 Relation of Lead and Angle Deviations to Pitch Diameter Tolerances of Gages	18

8 Gaging of Taper Pipe Threads	18
8.1 Gaging External Taper Threads	18
8.2 Gaging Internal Taper Threads	18
8.3 Gaging Practice	18
8.4 Gaging Chamfered, Countersunk, or Recessed Threads	18
9 Gaging of Straight Pipe Threads	22
9.1 Types of Gages	22
9.2 Gage Dimensions	22

Figures

1 Basic Form of American National Standard Taper Pipe Thread	2
2 American National Standard Taper Pipe Threads for Pressure-Tight Joints, NPT	4
3 American National Standard Taper Pipe Thread Notation	5
4 NPT Standard Taper Pipe Thread Plug and Ring Gages	14
5 Suggested Form of Gage Thread	14
6 Gaging External Taper Threads With Ring Gage	14
7 Gaging Internal Taper Threads	14
8 Gaging of Chamfered Threads	15

Tables

1 Limits on Crest and Root Truncation of American National Standard External and Internal Taper Pipe Threads, NPT	3
2 Basic Dimensions of American National Standard Taper Pipe Thread, NPT	6
3 Tolerances on Taper, Lead, and Angle of Pipe Threads, NPT	8
4 Dimensions, Internal Straight Threads in Pipe Coupling, NPSC	8
5 Dimensions of External and Internal Taper Pipe Threads for Railing Joints, NPTR	10
6 Dimensions of External and Internal Straight Pipe Threads for Fixtures, NPSM	11
7 Dimensions, External and Internal Straight Pipe Thread for Locknut Connections, NPSL	12
8 Basic Dimensions of Threaded Plug and Ring Gages for National American National Standard Taper Pipe Threads, NPT	17
9 Tolerances for American National Standard Working Taper Pipe Thread Plug and Ring Gages, NPT	19
10 Diameter Equivalent of Deviation in Half Included Angle of Thread for Tools and Gages	20
11 Diameter Equivalent of Deviation in Lead for Tools and Gages	21

Appendix	23
-----------------	----

AN AMERICAN NATIONAL STANDARD
PIPE THREADS, GENERAL PURPOSE (INCH)

1 INTRODUCTION**1.1 Scope**

This American National Standard covers dimensions and gaging of pipe threads for general purpose applications.

1.2 Thread Designations

1.2.1 The types of pipe threads included in this Standard are designated by specifying in sequence the nominal pipe size,¹ number of threads per inch and the thread series symbol as follows:

3/8 - 18 NPT
1/8 - 27 NPSC
1/2 - 14 NPTR
1/8 - 27 NPSM
1/8 - 27 NPSL
1 - 11.5 NPSH

For left hand threads add LH to the designation, otherwise right hand threads will be understood. For example:

3/8 - 18 NPT - LH

1.2.2 Each of these letters in the symbols has a definite significance as follows:

N = National (American) Standard
P = Pipe
T = Taper
C = Coupling
S = Straight
M = Mechanical
L = Locknut
H = Hose Coupling
R = Railing Fittings

¹Where it is necessary to use decimal notation for the size designation (as when inserting such in a computer or electronic accounting machine) the decimal equivalent of nominal pipe size may be substituted for fractional pipe sizes.

1.2.3 Coated or Plated Threads. The threaded product specifications covered in this Standard do not include an allowance for coatings or plating.

1.3 Sealing

1.3.1 Where pressure-tight joints are required, it is intended that taper pipe threads conforming to this Standard be made up wrench-tight with a sealant. To prevent galling on certain piping materials such as stainless steels, the sealant usually contains a lubricant.

1.3.2 Pipe threads designed for pressure-tight joints that may be used without sealing compounds (Dryseal Threads) are covered in ANSI B1.20.3 (Inch) and ANSI B1.20.4 (Metric Translation).

1.4 Inspection


A gaging method and tolerances are prescribed in this Standard to effect a functional inspection of the handtight L_1 engagement threads. However, conformance to this Standard requires that all basic design dimensions be met (within applicable tolerances) including extension of the thread elements to provide for wrench-tight makeup. Therefore, additional methods of gaging may be employed to evaluate conformance to the basic design dimensions. When additional methods of gaging are employed, they shall be agreed upon by the supplier and the purchaser.

1.5 Appendix

Useful and supplementary information which is not a part of this Standard is presented in the Appendix. Specifically, the Appendix gives Suggested Twist Drill Diameters for Drilled Hole Sizes for Pipe Threads.

1.6 Related Standard

Definitions of terms and symbols for thread dimensions are given in ANSI B1.7, Nomenclature, Definitions and Letter Symbols for Screw Threads.

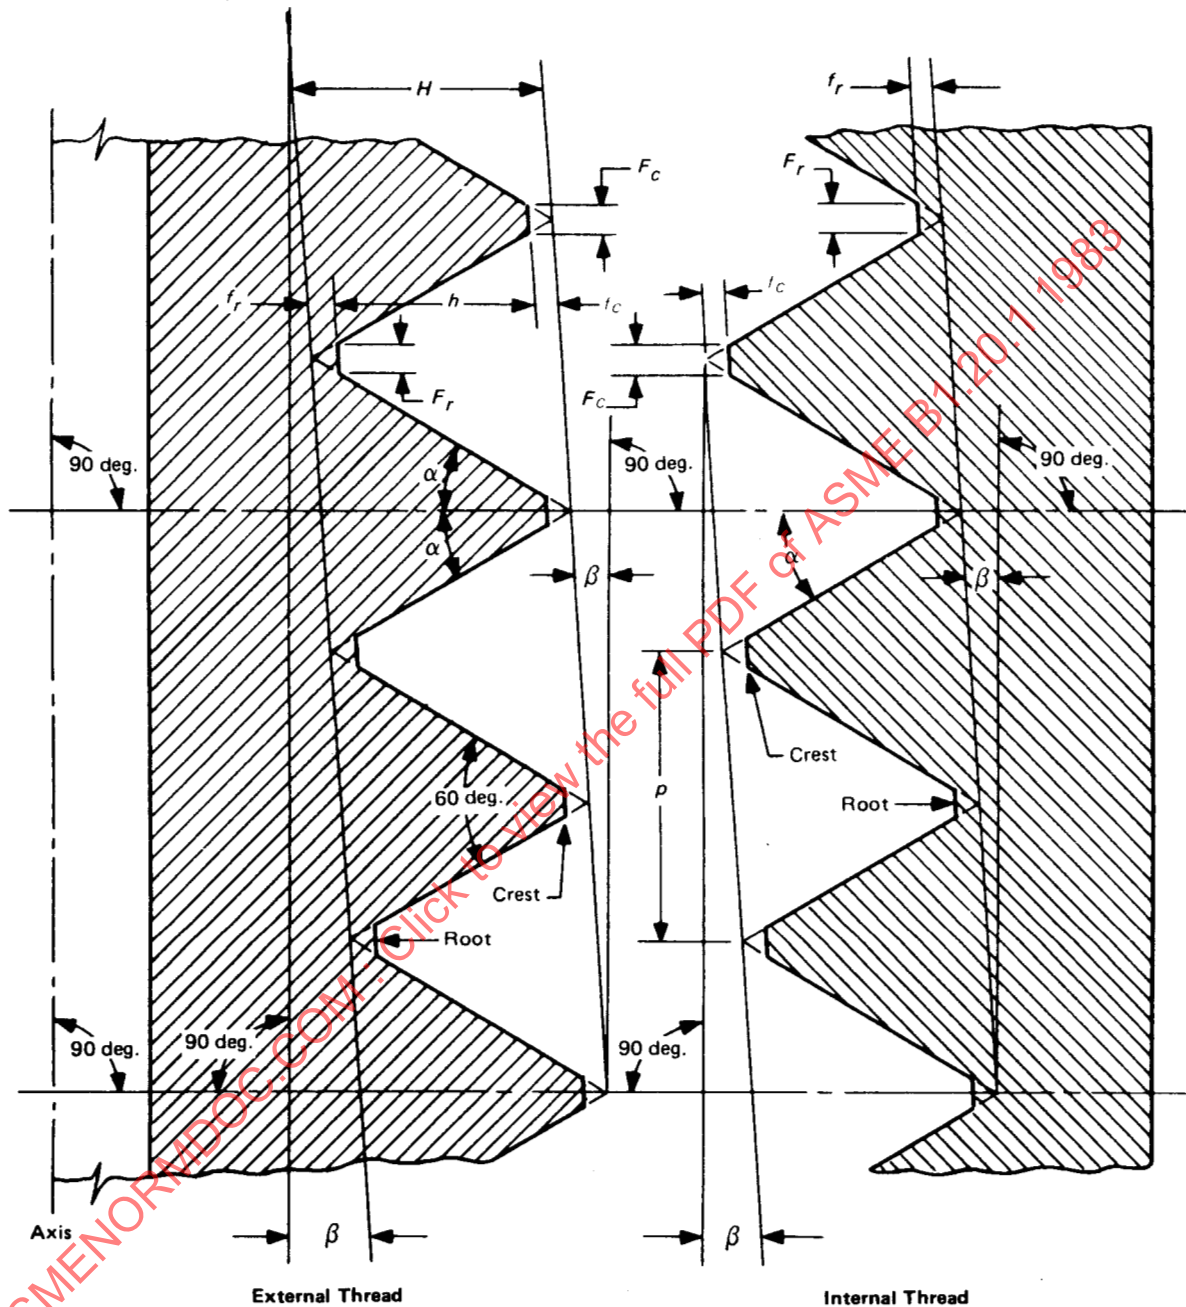

NOTATION

$H = 0.866025p$ = height of 60 deg. sharp V thread	$\beta = 1 \text{ deg. } 47 \text{ min.}$ = thread taper angle for 1/16 taper
$h = 0.800000p$ = height of thread on product	f_c = depth of truncation at crest
$p = 1/n$ = pitch (measured parallel to axis)	f_r = depth of truncation at root
n = number of threads per inch	F_c = width of flat at crest
$\alpha = 30 \text{ deg.}$ = thread flank angle	F_r = width of flat at root

GENERAL NOTE: For a symmetrical straight screw thread, $H = \cot \alpha / 2n$. For a symmetrical taper screw thread, $H = (\cot \alpha - \tan^2 \beta \tan \alpha) / 2n$, so that the exact value for an American National Standard taper pipe thread is $H = 0.865743p$ as against $H = 0.866025p$, the value given above. For an 8-pitch thread, which is the coarsest standard taper pipe thread pitch, the corresponding values of H are 0.108218 and 0.108253 respectively, the difference being 0.000035 inch. This difference being too small to be significant, the value of $H = 0.866025p$ continues in use for threads of 0.750 in., or less, taper/ft on the diameter.

FIG. 1 BASIC FORM OF AMERICAN NATIONAL STANDARD TAPER PIPE THREAD


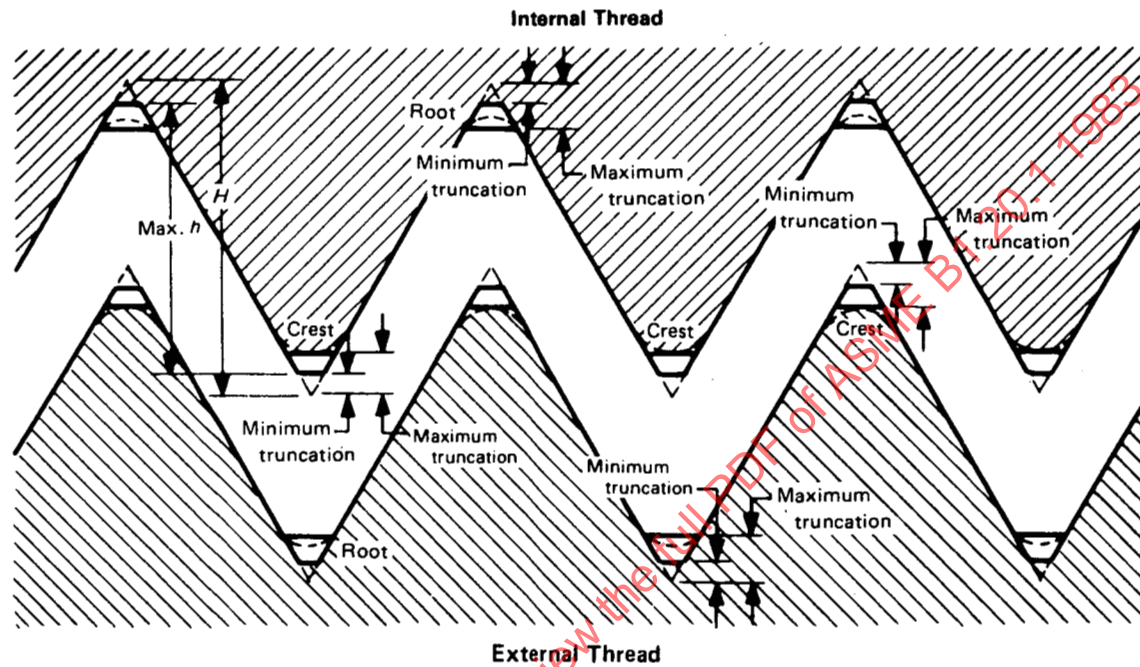


TABLE 1 LIMITS ON CREST AND ROOT TRUNCATION OF AMERICAN NATIONAL STANDARD
EXTERNAL AND INTERNAL TAPER PIPE THREADS, NPT¹

Threads/ in. (n)	Height of Sharp V Thread (H)	Height of Thread (h)		Truncation (f)					Equivalent Width of Flat (F)				
				Minimum		Maximum		Tolerance	Minimum		Maximum		Tolerance
		Maximum	Minimum	Formula	in.	Formula	in.		Formula	in.	Formula	in.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14
27	0.03208	0.02953	0.02496	0.033p	0.0012	0.096p	0.0036	0.0024	0.038p	0.0014	0.111p	0.0041	0.0027
18	0.04811	0.04444	0.03833	0.033p	0.0018	0.088p	0.0049	0.0031	0.038p	0.0021	0.102p	0.0057	0.0036
14	0.06186	0.05714	0.05071	0.033p	0.0024	0.078p	0.0056	0.0032	0.038p	0.0027	0.090p	0.0064	0.0037
11.5	0.07531	0.06957	0.06261	0.033p	0.0029	0.073p	0.0063	0.0034	0.038p	0.0033	0.084p	0.0073	0.0040
8	0.10825	0.10000	0.09275	0.033p	0.0041	0.062p	0.0078	0.0037	0.038p	0.0048	0.072p	0.0090	0.0042

NOTE:

- (1) The basic dimensions of the American National Standard Taper Pipe Thread are given in inches to four and five decimal places. While this implies a greater degree of precision than is ordinarily attained, these dimensions are so expressed for the purpose of eliminating errors in computations.

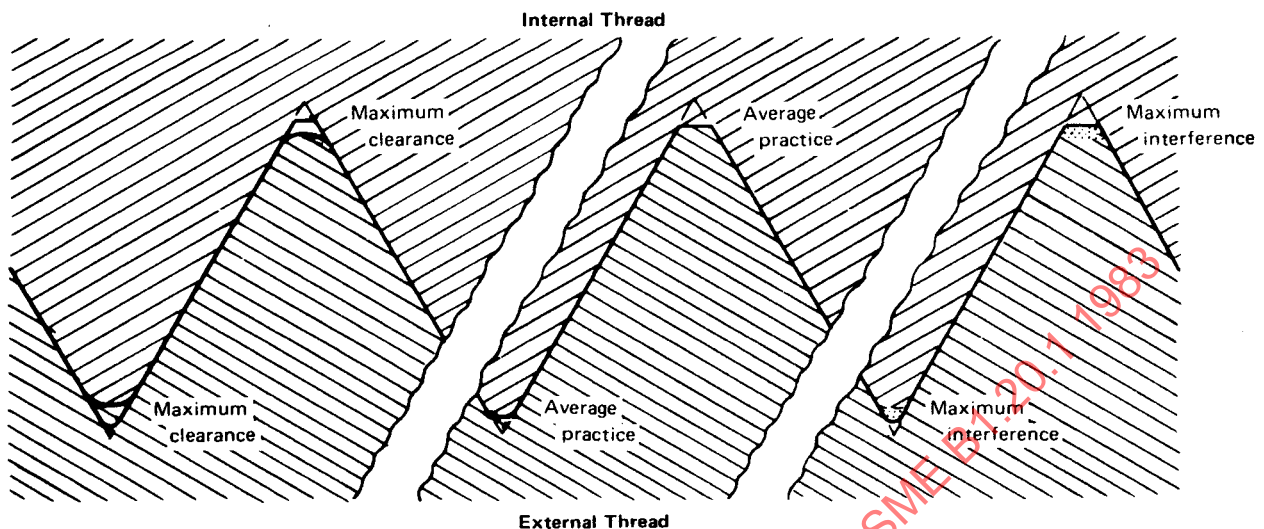

GENERAL NOTE:

When threaded joints are made up wrench-tight with lubricant or sealer, it is intended that the flanks shall be in contact.

FIG. 2. AMERICAN NATIONAL STANDARD TAPER PIPE THREADS FOR PRESSURE-TIGHT JOINTS, NPT

**2 AMERICAN NATIONAL STANDARD
PIPE THREAD FORM**

$$h = 0.800p = 0.800/n$$

2.1 Thread Form

The form of thread profile specified in this Standard shall be known as the American National Standard Pipe Thread Form. The relations as specified herein, for form of thread and general notation are shown in Fig. 1.

2.2 Angle of Thread

The angle between the sides of the thread is 60 deg when measured in an axial plane. The line bisecting this angle is perpendicular to the axis.

2.3 Truncation and Thread Height

The height of the sharp V thread, H , is

$$H = 0.866025p = 0.866025/n$$

where

p = pitch of thread
 n = threads per inch

The basic maximum depth of the truncated thread, h (see Fig. 1), is based on factors entering into the manufacture of cutting tools and the making of tight joints.

The crest and root of pipe threads are truncated a minimum of $0.033p$. The maximum depth of truncation for the crest and root of these pipe threads will be found in Table 1. The crests and roots of the external and internal threads may be truncated either parallel to the pitch line or parallel to the axis.

The sketch in Table 2, giving a sectional view of this Standard thread form, represents the truncated thread form by a straight line. However, when closely examined, the crests and roots of commercially manufactured pipe threads appear slightly rounded. When crests and roots of threading tools or chasers lie within the limits shown in Table 1, the pipe threads of products produced by such means are acceptable on the basis of in-process control.

**3 SPECIFICATION FOR GENERAL PURPOSE
TAPER PIPE THREADS, NPT**

3.1 Taper Pipe Threads

Threads made in accordance with these specifications consist of an external taper and an internal taper thread, to form the normal type of joint having general application on pipe and fittings. See Fig. 2.

NPT taper pipe threads are intended to be made up wrench-tight and with a sealant whenever a pressure-tight joint is required.

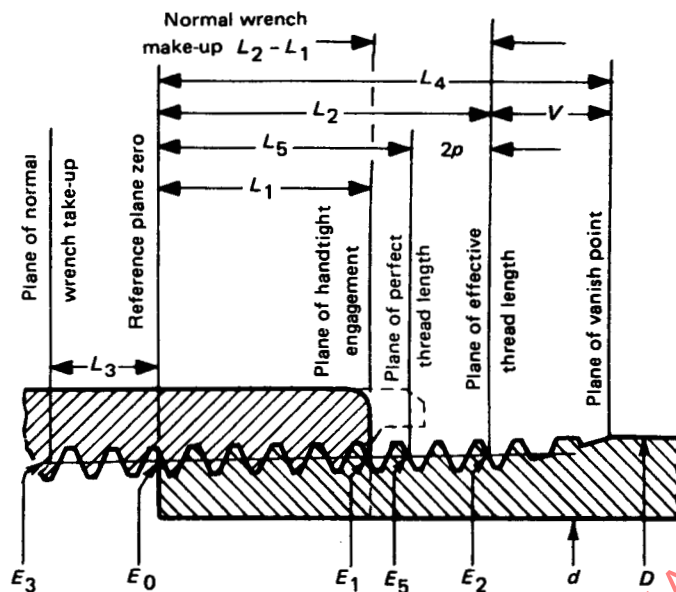


FIG. 3 AMERICAN NATIONAL STANDARD
TAPER PIPE THREAD NOTATION

Sealing is affected by out-of-roundness which is possible between the wrench-tight mated parts in final assembly. This will vary depending on the method for producing the thread in conjunction with the elasticity and/or ductility of the mating parts and the resultant conformance at final assembly.

3.1.1 Thread Designation and Notation. American National Standard Taper Pipe Threads are designated in accordance with 1.2.1 as follows:

3/8 - 18 NPT

Standard notation applicable to American National Standard Taper Pipe Threads is shown in Fig. 3.

3.1.2 Designation of Plated Threads. The product specifications of this Standard do not include an allowance for plating. If plating is desired, it may be necessary to modify the threads since the same final gaging requirements must be satisfied for plated and unplated parts. This may be emphasized by adding the words AFTER PLATING to the designation. For manufacturing purposes, notes for plated taper pipe threads may specify the gage limits (turns or threads engagement) before plating followed by the words BEFORE PLATING. These should be followed by the standard gage limits (turns or threads engagement) after plating and the words AFTER PLATING.

3.1.3 Form of Thread. The form of the thread for American National Standard Taper Pipe Threads is that specified in 2.1.

3.1.4 Taper of Thread. The taper of the thread is 1 in 16 or 0.75 in./ft measured on the diameter and along the axis.

3.1.5 Diameter of Thread. The basic pitch diameters of the taper thread are determined by the following formulas² based on the outside diameter of the pipe and the pitch of the thread:

$$\begin{aligned} E_0 &= D - (0.05D + 1.1) 1/n \\ &= D - (0.05D + 1.1) p \\ E_1 &= E_0 + 0.0625L_1 \end{aligned}$$

where

- D = outside diameter of pipe
- E_0 = pitch diameter of thread at end of pipe or small end of external thread
- E_1 = pitch diameter of thread at the gaging notch or large end of internal thread
- L_1 = normal engagement by hand between external and internal threads
- n = threads per inch

²For the 1/8-27 and 1/4-18 sizes, E_1 approx. = $D - (0.05D + 0.827)p$.

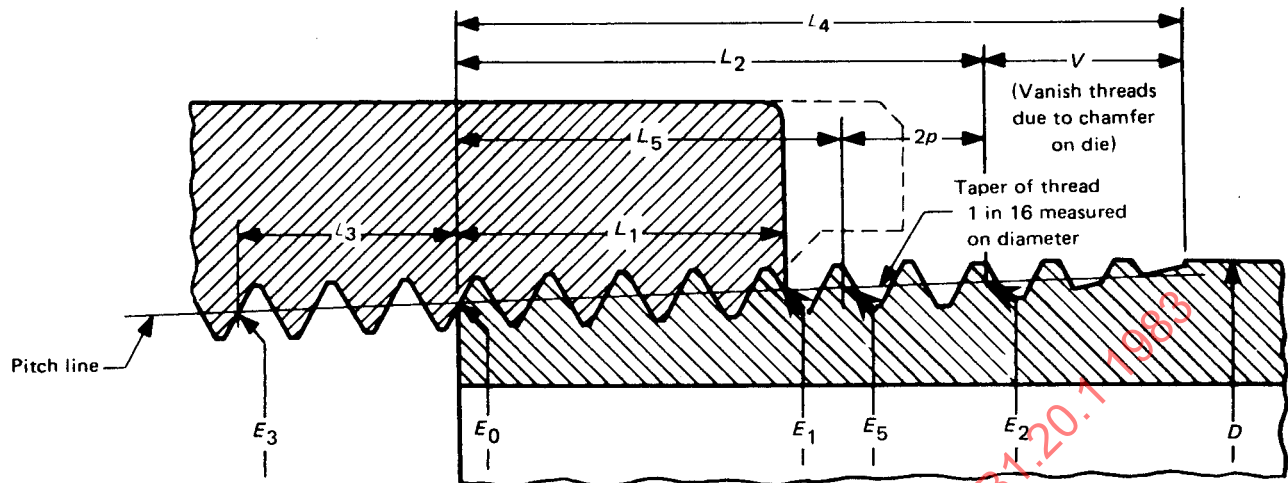


TABLE 2 BASIC DIMENSIONS OF AMERICAN NATIONAL STANDARD TAPER PIPE THREAD, NPT¹

Nominal Pipe Size	O.D. of Pipe (D)	Threads/in. (n)	Pitch of Thread (P)	Pitch Diam. at Beginning of External Thread (E_0)	Handtight Engagement			Effective Thread, External		
					Length ² (L_1)		Diam. ³ (E_1)	Length ⁴ (L_2)		Diam. (E_2)
					inch	Threads		inch	Threads	
1	2	3	4	5	6	7	8	9	10	11
1/16	0.3125	27	0.03704	0.27118	0.160	4.32	0.28118	0.2611	7.05	0.28750
1/8	0.405	27	0.03704	0.36351	0.1615	4.36	0.37360	0.2639	7.12	0.38000
1/4	0.540	18	0.05556	0.47739	0.2278	4.10	0.49163	0.4018	7.23	0.50250
3/8	0.675	18	0.05556	0.61201	0.240	4.32	0.62701	0.4078	7.34	0.63750
1/2	0.840	14	0.07143	0.75843	0.320	4.48	0.77843	0.5337	7.47	0.79179
3/4	1.050	14	0.07143	0.96768	0.339	4.75	0.98887	0.5457	7.64	1.00179
1	1.315	11.5	0.08696	1.21363	0.400	4.60	1.23863	0.6828	7.85	1.25630
1 1/4	1.660	11.5	0.08686	1.55713	0.420	4.83	1.58338	0.7068	8.13	1.60130
1 1/2	1.900	11.5	0.08696	1.79609	0.420	4.83	1.82234	0.7235	8.32	1.84130
2	2.375	11.5	0.08696	2.26902	0.436	5.01	2.29627	0.7565	8.70	2.31630
2 1/2	2.875	8	0.12500	2.71953	0.682	5.46	2.76216	1.1375	9.10	2.79062
3	3.500	8	0.12500	3.34062	0.766	6.13	3.38850	1.2000	9.60	3.41562
3 1/2	4.000	8	0.12500	3.83750	0.821	6.57	3.88881	1.2500	10.00	3.91562
4	4.500	8	0.12500	4.33438	0.844	6.75	4.38712	1.3000	10.40	4.41562
5	5.563	8	0.12500	5.39073	0.937	7.50	5.44929	1.4063	11.25	5.47862
6	6.625	8	0.12500	6.44609	0.958	7.66	6.50597	1.5125	12.10	6.54062
8	8.625	8	0.12500	8.43359	1.063	8.50	8.50003	1.7125	13.70	8.54062
10	10.750	8	0.12500	10.54531	1.210	9.68	10.62094	1.9250	15.40	10.66562
12	12.750	8	0.12500	12.53281	1.360	10.88	12.61781	2.1250	17.00	12.66562
14 O.D.	14.000	8	0.12500	13.77500	1.562	12.50	13.87262	2.2500	18.00	13.91562
16 O.D.	16.000	8	0.12500	15.76250	1.812	14.50	15.87575	2.4500	19.60	15.91562
18 O.D.	18.000	8	0.12500	17.75000	2.000	16.00	17.87500	2.6500	21.20	17.91562
20 O.D.	20.000	8	0.12500	19.73750	2.125	17.00	19.87031	2.8500	22.80	19.91562
24 O.D.	24.000	8	0.12500	23.71250	2.375	19.00	23.86094	3.2500	26.00	23.91562

NOTES:

- (1) The basic dimensions of the American National Standard Taper Pipe Thread are given in inches to four or five decimal places. While this implies a greater degree of precision than is ordinarily attained, these dimensions are the basis of gage dimensions and are so expressed for the purpose of eliminating errors in computations.
- (2) Also length of thin ring gage and length from gaging notch to small end of plug gage.
- (3) Also pitch diameter at gaging notch (handtight plane).
- (4) Also length of plug gage.

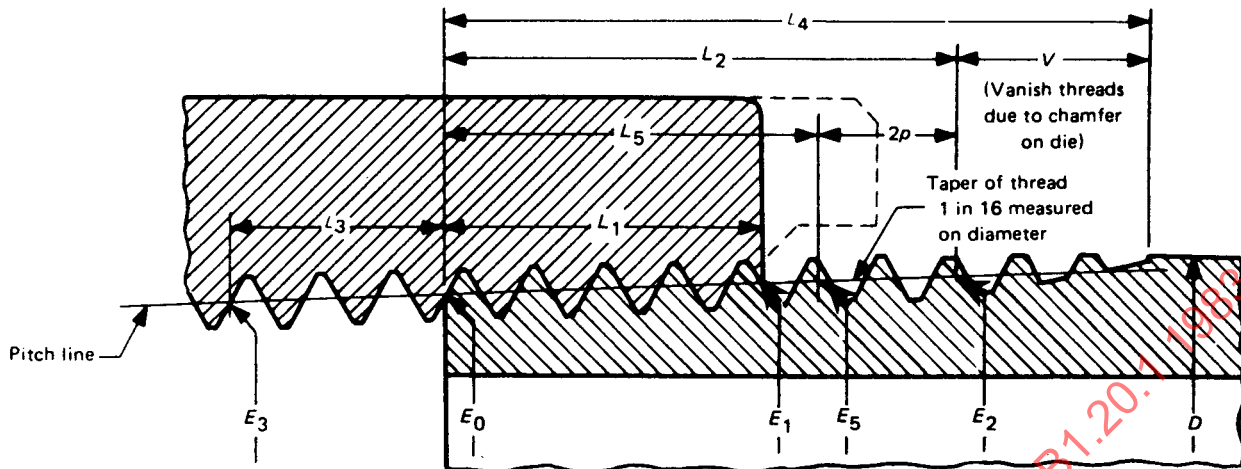


TABLE 2 BASIC DIMENSIONS OF AMERICAN NATIONAL STANDARD TAPER PIPE THREAD, NPT¹ (CONT'D)

Nominal Pipe Size	Length, L_1 Plane to L_2 Plane External Thread ($L_2 - L_1$)		Wrench Makeup Length for Internal Thread ⁷			Vanish Thread (V)		Overall ⁸ Length External Thread (L_4)	Nominal Complete ⁵ External Threads		Height of Thread (h)	Increase in Diam./ Thread (0.0625/n)	Basic ⁶ Minor Diam. at Small End of Pipe (K_0)
			Length (L_3)		Diam. (E_3)				Length (L_5)	Diam. (E_5)			
	in.	Thread	in.	Thread		in.	Thread						
1	12	13	14	15	16	17	18	19	20	21	22	23	24
$\frac{1}{16}$	0.1011	2.73	0.1111	3	0.26424	0.1285	3.47	0.3896	0.1870	0.28287	0.02963	0.00231	0.2416
$\frac{1}{8}$	0.1024	2.76	0.1111	3	0.35656	0.1285	3.47	0.3924	0.1898	0.37537	0.02963	0.00231	0.3339
$\frac{1}{4}$	0.1740	3.13	0.1667	3	0.46697	0.1928	3.47	0.5946	0.2907	0.49556	0.04444	0.00347	0.4329
$\frac{3}{8}$	0.1678	3.02	0.1667	3	0.60160	0.1928	3.47	0.6006	0.2967	0.63056	0.04444	0.00347	0.5676
$\frac{1}{2}$	0.2137	2.99	0.2143	3	0.74504	0.2478	3.47	0.7815	0.3909	0.78286	0.05714	0.00446	0.7013
$\frac{3}{4}$	0.2067	2.89	0.2143	3	0.95429	0.2478	3.47	0.7935	0.4029	0.99286	0.05714	0.00446	0.9105
1	0.2828	3.25	0.2609	3	1.19733	0.3017	3.47	0.9845	0.5089	1.24543	0.06957	0.00543	1.1441
1 $\frac{1}{4}$	0.2868	3.30	0.2609	3	1.54083	0.3017	3.47	1.0085	0.5329	1.59043	0.06957	0.00543	1.4876
1 $\frac{1}{2}$	0.3035	3.49	0.2609	3	1.77978	0.3017	3.47	1.0252	0.5496	1.83043	0.06957	0.00543	1.7265
2	0.3205	3.69	0.2609	3	2.25272	0.3017	3.47	1.0582	0.5826	2.30543	0.06957	0.00543	2.1995
2 $\frac{1}{2}$	0.4555	3.64	0.2500	2	2.70391	0.4337	3.47	1.5712	0.8875	2.77500	0.100000	0.00781	2.6195
3	0.4340	3.47	0.2500	2	3.32500	0.4337	3.47	1.6337	0.9500	3.40000	0.100000	0.00781	3.2406
3 $\frac{1}{2}$	0.4290	3.43	0.2500	2	3.82188	0.4337	3.47	1.6837	1.0000	3.90000	0.100000	0.00781	3.7375
4	0.4560	3.65	0.2500	2	4.31875	0.4337	3.47	1.7337	1.0500	4.40000	0.100000	0.00781	4.2344
5	0.4693	3.75	0.2500	2	5.37511	0.4337	3.47	1.8400	1.1563	5.46300	0.100000	0.00781	5.2907
6	0.5545	4.44	0.2500	2	6.43047	0.4337	3.47	1.9462	1.2625	6.52500	0.100000	0.00781	6.3461
8	0.6495	5.20	0.2500	2	8.41797	0.4337	3.47	2.1462	1.4625	8.52500	0.100000	0.00781	8.3336
10	0.7150	5.72	0.2500	2	10.52969	0.4337	3.47	2.3587	1.6750	10.65000	0.100000	0.00781	10.4453
12	0.7650	6.12	0.2500	2	12.51719	0.4337	3.47	2.5587	1.8750	12.65000	0.100000	0.00781	12.4328
14 O.D.	0.6880	5.50	0.2500	2	13.75938	0.4337	3.47	2.6837	2.0000	13.90000	0.100000	0.00781	13.6750
16 O.D.	0.6380	5.10	0.2500	2	15.74688	0.4337	3.47	2.8837	2.2000	15.90000	0.100000	0.00781	15.6625
18 O.D.	0.6500	5.20	0.2500	2	17.73438	0.4337	3.47	3.0837	2.4000	17.90000	0.100000	0.00781	17.6500
20 O.D.	0.7250	5.80	0.2500	2	19.72188	0.4337	3.47	3.2837	2.6000	19.90000	0.100000	0.00781	19.6375
24 O.D.	0.8750	7.00	0.2500	2	23.69688	0.4337	3.47	3.6837	3.0000	23.90000	0.100000	0.00781	23.6125

(5) The length L_5 from the end of the pipe determines the plane beyond which the thread form is incomplete at the crest. The next two threads are complete at the root. At this plane the cone formed by the crests of the thread intersects the cylinder forming the external surface of the pipe. $L_5 = L_2 - 2p$.

(6) Given as information for use in selecting tap drills. (See Appendix).

(7) Military Specification MIL-P-7105 gives the wrench makeup as three threads for sizes 3 and smaller. The E_3 dimensions are as follows: Nominal pipe size 2 1/2 = 2.69609 and size 3 = 3.31719; sizes 2 and smaller same as above, col. 16.

(8) Reference dimension.

**TABLE 3 TOLERANCES ON TAPER, LEAD, AND
ANGLE OF PIPE THREADS, NPT**

Nominal Pipe Size	Threads/in. (n)	Tolerances		Lead in Length of Effective Threads (±)	60 deg. Angle of Threads, degrees (±)
		Taper on Pitch Line (3/4 in./ft)			
		Maximum	Minimum		
1	2	3	4	5	6
1/16, 1/8	27	+ 1/8	- 1/16	0.003	2 1/2
1/4, 3/8	18	+ 1/8	- 1/16	0.003	2
1/2, 3/4	14	+ 1/8	- 1/16	0.003 ¹	2
1, 1 1/4, 1 1/2, 2	11.5	+ 1/8	- 1/16	0.003 ¹	1 1/2
2 1/2 and larger	8	+ 1/8	- 1/16	0.003 ¹	1 1/2

GENERAL NOTE:

For tolerances on depth of thread see Table 1, and for tolerances on functional size, see 3.2.1.

NOTE:

(1) The tolerance on lead shall be ±0.003 in./in. on any size threaded to an effective thread length greater than 1 in.

**TABLE 4 DIMENSIONS, INTERNAL STRAIGHT THREADS IN PIPE COUPLING, NPSC
(Pressure-tight Joints With Lubricant or Sealant)**

Nominal Pipe Size	O.D. of Pipe (D)	Threads/in. (n)	Minor Diameter, Minimum	Pitch Diameter ¹	
				Minimum	Maximum
1	2	3	4	5	6
1/8	0.405	27	0.340	0.3701	0.3771
1/4	0.540	18	0.442	0.4864	0.4968
3/8	0.675	18	0.577	0.6218	0.6322
1/2	0.840	14	0.715	0.7717	0.7851
3/4	1.050	14	0.925	0.9822	0.9956
1	1.315	11.5	1.161	1.2305	1.2468
1 1/4	1.660	11.5	1.506	1.5752	1.5915
1 1/2	1.900	11.5	1.745	1.8142	1.8305
2	2.375	11.5	2.219	2.2881	2.3044
2 1/2	2.875	8	2.650	2.7504	2.7739
3	3.500	8	3.277	3.3768	3.4002
3 1/2	4.000	8	3.777	3.8771	3.9005
4	4.500	8	4.275	4.3754	4.3988

NOTE:

(1) Attention is called to the fact that the actual pitch diameter of the straight tapped hole will be slightly smaller than the value given when gaged with a taper plug gage as specified in 9.1.2.

3.1.6 Length of Thread. The basic length of the effective external taper thread L_2 , is determined by the following formula based on the outside diameter of the pipe and the pitch of the thread:

$$L_2 = (0.80D + 6.8) 1/n \\ = (0.80D + 6.8) p$$

where

D = outside diameter of pipe
 n = threads per inch

This formula determines directly the length of effective thread which includes two usable threads slightly incomplete at the crest.

3.1.7 Engagement Between External and Internal Taper Threads. The normal length of engagement between external and internal taper threads when screwed together handtight is shown in col. 6, Table 2. This length is controlled by the construction and use of the gages. It is recognized that in special applications, such as flanges for high pressure work, longer thread engagement is used, in which case the pitch diameter (dimension E_1 , Table 2) is maintained and the pitch diameter E_0 at the end of the pipe is proportionately smaller.

3.1.8 Basic Dimensions. The basic dimensions of taper pipe threads, derived from the above specifications, are given in Table 2. All dimensions are given in inches unless otherwise specified.

3.2 Tolerances

3.2.1 Manufacturing Tolerance on Product. The maximum allowable deviation in the commercial product is one turn large or small from gages made to the basic dimensions. See 8.2 and 8.3.

3.2.2 Tolerances on Thread Elements. The permissible deviations in thread elements are given in Table 3. This table is a guide for establishing limits of the thread elements of taps, dies, and thread chasers. Conformance to these limits may be required on product threads, in which case specifications shall require control and checking of thread elements.

On pipe fittings and valves (not steel or high grade alloys used in critical services) for steam pressures 300 lb and below, it is intended that plug and ring gage practices as established in this Standard be used

in conjunction with tooling control of thread elements, e.g., taps and dies, to provide satisfactory control of functional size. Therefore, no tolerances on thread elements have been established for this class.

For service conditions, where more exact checks are required, procedures have been developed by industry to supplement the standard plug and ring gage method of gaging.

4 SPECIFICATIONS FOR INTERNAL STRAIGHT THREADS IN PIPE COUPLINGS, NPSC

4.1 Straight Pipe Threads in Pipe Couplings

Threads in pipe couplings made in accordance with these specifications are straight (parallel) threads of the same thread form as the American National Standard Taper Pipe Thread specified in 2.1. They are used to form pressure-tight joints when assembled with an American National Standard external taper pipe thread and made up wrench-tight with lubricant or sealant.

4.1.1 Thread Designation. The American National Standard Coupling Straight Pipe Threads are designated in accordance with 1.2.1 as follows:

1/8 - 27 NPSC

4.1.2 Dimensions and Limits of Size. The dimensions and pitch diameter limits of size are specified in Table 4. The pitch diameter limits of size correspond to one and one-half turns large or small of the standard taper pipe thread. The major and minor diameters vary with the pitch diameter, as the American National Standard Pipe Thread form is maintained within the truncation tolerances shown in Table 1.

5 SPECIFICATIONS FOR RAILING JOINT TAPER PIPE THREADS, NPTR

5.1 Railing Joints

Railing joints that require a rigid mechanical thread joint may be made with external and internal taper threads.

The external thread is basically the same as the American National Standard Taper Pipe Thread, except that it is shortened to permit the use of the

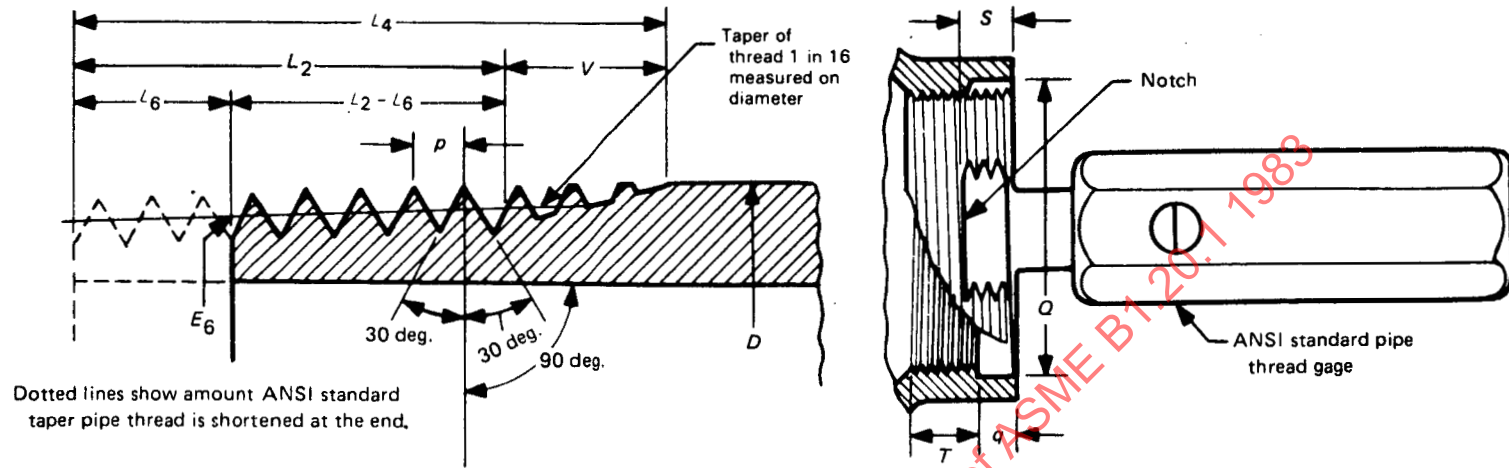


TABLE 5 DIMENSIONS OF EXTERNAL AND INTERNAL TAPER PIPE THREADS FOR RAILING JOINTS, NPTR¹
(Mechanical Joints)

Nom. Pipe Size	O.D. of Pipe (D)	Threads/ in. (n)	Height of Thread (h)	Pitch Diameter at End of External Thread (E ₆)	Shortening of Thread (L ₆)		Length of Effective Thread (L ₂ - L ₆)		Total Length of External Thread, max. (L ₄ - L ₆)		Incomplete Threads due to Chamfer of Die, max. (V)		Depth of Recess in Fitting (q)	Dia. of Recess in Fitting (Q)	Length (T)	Distance Gage ² Notch comes below Face of Fitting (S)	
					in.	Threads	in.	Threads	in.	Threads	in.	Threads	Minimum	Minimum	Minimum	in.	Threads
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
1/2	0.840	14	0.0571	0.7718	0.214	3	0.320	4.47	0.499	6.98	0.179	2 1/2	0.18	0.86	0.25	0.286	4
3/4	1.050	14	0.0571	0.9811	0.214	3	0.332	4.64	0.510	7.15	0.179	2 1/2	0.18	1.07	0.25	0.286	4
1	1.315	11.5	0.0696	1.2299	0.261	3	0.422	4.85	0.639	7.35	0.217	2 1/2	0.22	1.34	0.30	0.348	4
1 1/4	1.660	11.5	0.0696	1.5734	0.261	3	0.446	5.13	0.707	8.13	0.261	3	0.26	1.68	0.39	0.348	4
1 1/2	1.900	11.5	0.0696	1.8124	0.261	3	0.463	5.32	0.724	8.33	0.261	3	0.26	1.92	0.43	0.348	4
2	2.375	11.5	0.0696	2.2853	0.261	3	0.496	5.70	0.757	8.70	0.261	3	0.26	2.40	0.43	0.348	4
2 1/2	2.875	8	0.1000	2.7508	0.500	4	0.638	5.10	1.013	8.10	0.375	3	0.38	2.90	0.63	0.625	5
3	3.500	8	0.1000	3.3719	0.500	4	0.700	5.60	1.075	8.60	0.375	3	0.38	3.53	0.63	0.625	5
3 1/2	4.000	8	0.1000	3.8688	0.500	4	0.750	6.00	1.125	9.00	0.375	3	0.38	4.04	0.63	0.625	5
4	4.500	8	0.1000	4.3656	0.500	4	0.800	6.40	1.175	9.40	0.375	3	0.38	4.54	0.63	0.625	5

NOTES:

- (1) These dimensions agree with those developed by the Manufacturers Standardization Society of the Valve and Fittings Industry. Thread lengths are specified to three decimal places for convenience.
- (2) American National Standard Taper Pipe Thread Plug Gage. See Section 7.

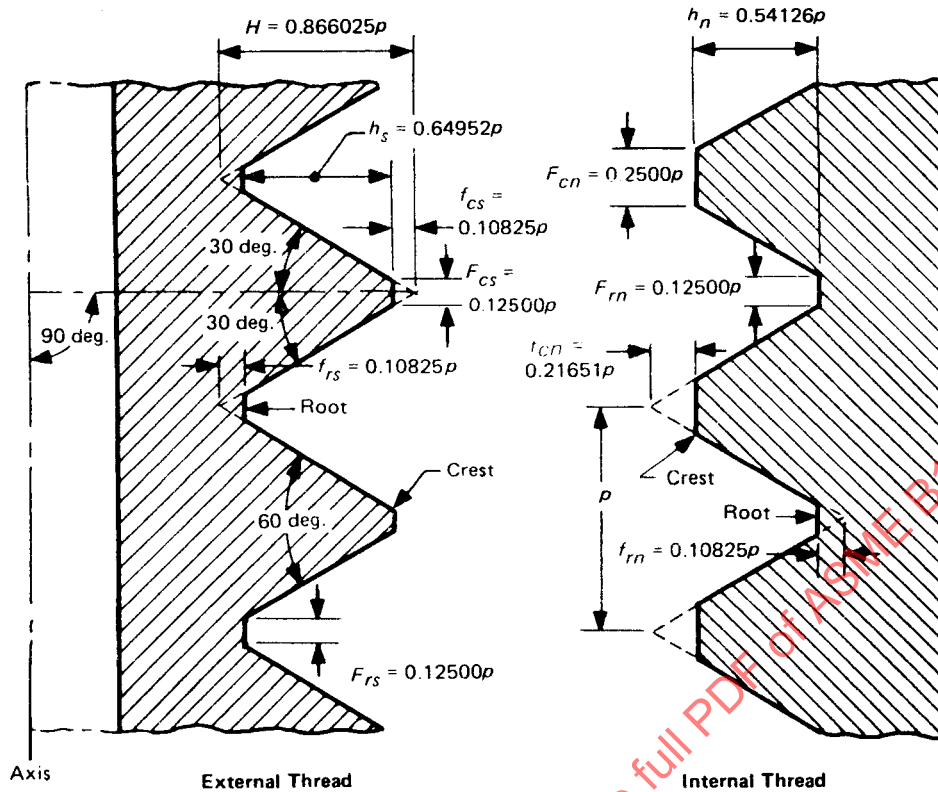


TABLE 6 DIMENSIONS OF EXTERNAL AND INTERNAL STRAIGHT PIPE THREADS FOR FIXTURES, NPSM
(Free Fitting Mechanical Joints)

Nom. Pipe Size	O.D. of Pipe (D)	Threads/ in.	Allow- ance	External Thread, Class 2A				Internal Thread, Class 2B			
				Major Diameter		Pitch Diameter		Minor Diameter		Pitch Diameter	
				Maximum	Minimum	Maximum	Minimum	Minimum	Maximum	Minimum ¹	Maximum
1	2	3	4	5	6	7	8	9	10	11	12
1/8	0.405	27	0.0011	0.397	0.390	0.3725	0.3689	0.358	0.364	0.3736	0.3783
1/4	0.540	18	0.0013	0.526	0.517	0.4903	0.4859	0.468	0.481	0.4916	0.4974
3/8	0.675	18	0.0014	0.662	0.653	0.6256	0.6211	0.603	0.612	0.6270	0.6329
1/2	0.840	14	0.0015	0.823	0.813	0.7769	0.7718	0.747	0.759	0.7784	0.7851
3/4	1.050	14	0.0016	1.034	1.024	0.9873	0.9820	0.958	0.970	0.9889	0.9958
1	1.315	11.5	0.0017	1.293	1.281	1.2369	1.2311	1.201	1.211	1.2386	1.2462
1 1/4	1.660	11.5	0.0018	1.638	1.626	1.5816	1.5756	1.546	1.555	1.5834	1.5912
1 1/2	1.900	11.5	0.0018	1.877	1.865	1.8205	1.8144	1.785	1.794	1.8223	1.8302
2	2.375	11.5	0.0019	2.351	2.339	2.2944	2.2882	2.259	2.268	2.2963	2.3044
2 1/2	2.875	8	0.0022	2.841	2.826	2.7600	2.7526	2.708	2.727	2.7622	2.7720
3	3.500	8	0.0023	3.467	3.452	3.3862	3.3786	3.334	3.353	3.3885	3.3984
3 1/2	4.000	8	0.0023	3.968	3.953	3.8865	3.8788	3.835	3.848	3.8888	3.8988
4	4.500	8	0.0023	4.466	4.451	4.3848	4.3771	4.333	4.346	4.3871	4.3971
5	5.563	8	0.0024	5.528	5.513	5.4469	5.4390	5.395	5.408	5.4493	5.4598
6	6.625	8	0.0024	6.585	6.570	6.5036	6.4955	6.452	6.464	6.5060	6.5165

GENERAL NOTES:

- (a) NPSM threads are of Unified screw thread form to Classes 2A/2B tolerances, having the minimum pitch diameter of the internal thread basic and equal to E_1 of NPT threads.
- (b) The minor diameters of external threads and major diameters of internal threads are those as produced by commercial straight pipe dies and commercial ground straight pipe taps.
- The major diameter of the external thread has been calculated on the basis of a truncation of $0.10825p$, and the minor diameter of the internal thread has been calculated on the basis of a truncation of $0.21651p$, to provide no interference at crest and root when product is gaged with gages made in accordance with 9.2.

NOTE:

- (1) Column 11 is the same as the pitch diameter at the large end of internal thread, E_1 , Basic. (See Table 2, col. 8.)

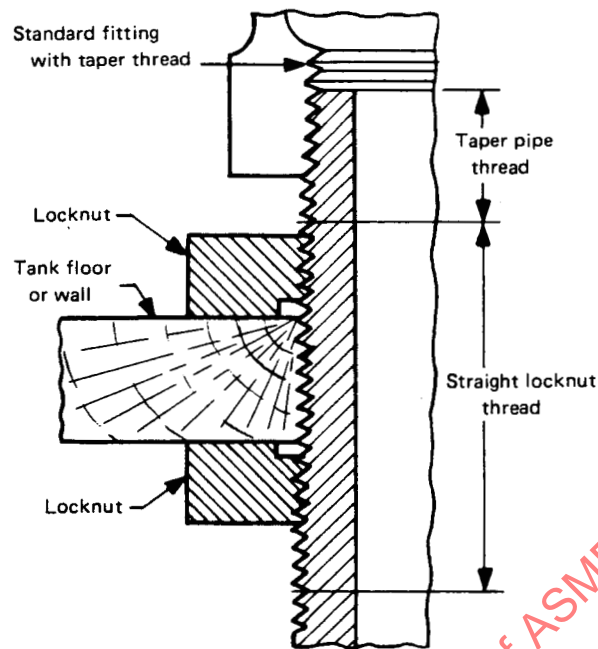


TABLE 7 DIMENSIONS, EXTERNAL AND INTERNAL STRAIGHT PIPE THREAD FOR
LOCKNUT CONNECTIONS, NPSL (Loose Fitting Mechanical Joints)

Nominal Pipe Size	O.D. of Pipe (D)	Threads/ inch	External Threads			Internal Threads		
			Maximum ¹ Major Diameter	Pitch Diameter		Minimum ¹ Minor Diameter	Pitch Diameter	
				Maximum	Minimum		Minimum	Maximum
1	2	3	4	5	6	7	8	9
1/8	0.405	27	0.409	0.3840	0.3805	0.362	0.3863	0.3898
1/4	0.540	18	0.541	0.5038	0.4986	0.470	0.5073	0.5125
3/8	0.675	18	0.678	0.6409	0.6357	0.607	0.6444	0.6496
1/2	0.840	14	0.844	0.7963	0.7896	0.753	0.8008	0.8075
3/4	1.050	14	1.054	1.0067	1.0000	0.964	1.0112	1.0179
1	1.315	11.5	1.318	1.2604	1.2523	1.208	1.2658	1.2739
1 1/4	1.660	11.5	1.663	1.6051	1.5970	1.553	1.6106	1.6187
1 1/2	1.900	11.5	1.902	1.8441	1.8360	1.792	1.8495	1.8576
2	2.375	11.5	2.376	2.3180	2.3099	2.265	2.3234	2.3315
2 1/2	2.875	8	2.877	2.7934	2.7817	2.718	2.8012	2.8129
3	3.500	8	3.503	3.4198	3.4081	3.344	3.4276	3.4393
3 1/2	4.000	8	4.003	3.9201	3.9084	3.845	3.9279	3.9396
4	4.500	8	4.502	4.4184	4.4067	4.343	4.4262	4.4379
5	5.563	8	5.564	5.4805	5.4688	5.405	5.4884	5.5001
6	6.625	8	6.620	6.5372	6.5255	6.462	6.5450	6.5567
8	8.625	8	8.615	8.5313	8.5196	8.456	8.5391	8.5508
10	10.750	8	10.735	10.6522	10.6405	10.577	10.6600	10.6717
12	12.750	8	12.732	12.6491	12.6374	12.574	12.6569	12.6686

NOTE:

(1) NPSL threads are standard pipe thread form where the pitch diameters of the external threads are fixed at 2.5 and 4 turns larger than basic E_1 , and where the pitch diameters of the internal threads are fixed at 5 and 6.5 turns larger than basic E_1 , thus providing an allowance equivalent to one turn of the standard taper pipe thread.

As the American National Standard Straight Pipe Thread form of thread is produced by a single tool, the major and the minor diameters of the internal thread and the minor diameter of the external thread are presumed to vary with the pitch diameter. The major diameter of the external thread is usually determined by the diameter of the pipe. These theoretical diameters result from adding the depth of the truncated thread ($0.666025 \times p$) to the maximum pitch diameters in col. 5, and it should be understood that commercial pipe will not always have these maximum major diameters.

The locknut thread is established on the basis of retaining the greatest possible amount of metal thickness between the bottom of the thread and the inside of the pipe.

In order that a locknut may fit loosely on the externally threaded part, an allowance equal to the *increase in pitch diameter per turn* is provided, with a tolerance of 1.5 turns for both external and internal threads.

larger end of the pipe thread. See Table 5. The dimensions of these external and internal threads are shown in Table 5. A recess in the fitting provides a covering for the last scratch or sharp edges of incomplete threads on the pipe.

5.1.1 Thread Designation. American National Standard Railing Joint Taper Pipe Threads are designated in accordance with 1.2.1 as follows:

1/2 - 14 NPTR

5.1.2 Form of Thread. The form of the thread is the same as the form of the American National Standard Taper Pipe Thread shown in Fig. 1.

5.1.3 Tolerances on Thread Elements. The gaging of these threads is specified in Table 5. The maximum allowable deviation in the external thread is no turns large and one turn small. The maximum allowable deviation in the internal thread is one turn large, no turns small.

6 SPECIFICATIONS FOR STRAIGHT PIPE THREADS FOR MECHANICAL JOINTS; NPSM, NPSL, NPSH

6.1 Straight Pipe Threads

In addition to pressure-tight pipe joints, for which taper external threads and either taper or straight internal threads are used, there are mechanical joints where straight pipe threads are used to advantage on both external and internal threads. Three of these straight pipe thread joints are covered by this Standard, all of which are based on the pitch diameter of the American National Standard Taper Pipe Thread at the gaging notch (dimension E_1 of Table 2) but have various truncations at crest and root as described below. These three types of joints are as follows:

- (a) free-fitting mechanical joints for fixtures, Table 6, both external and internal, NPSM.
- (b) loose-fitting mechanical joints with locknuts, Table 7, both external and internal, NPSL.
- (c) loose-fitting mechanical joints for hose couplings (ANSI B2.4), NPSH.

6.1.1 Thread Designations. The above types of straight pipe threads for mechanical joints are designated in accordance with 1.2.1 as follows:

1/8 - 27 NPSM

1/8 - 27 NPSL

1 - 11.5 NPSH

6.1.2 Pitch and Flank Angle. The pitch and flank angle are the same as the corresponding dimensions of the taper pipe thread described in Section 3.

6.1.3 Diameter of Thread. The basic pitch diameter for both the external and internal straight pipe threads is equal to the pitch diameter of the American National Standard Taper Pipe Thread at the gaging notch (dimension E_1 of Table 2), which is the same as at the large end of the internal taper pipe thread.

6.2 Free-Fitting Mechanical Joints for Fixtures, NPSM

Pipe is often used for special applications where there are no internal pressures. Where straight thread joints are required for mechanical assemblies, straight pipe threads are often found more suited or convenient.

The dimensions of these threads, as given in Table 6, are for pipe thread connections where reasonably close fit of the mating parts is desired.

6.3 Loose-Fitting Mechanical Joints With Locknuts, NPSL

The American National Standard External Locknut thread is designed to produce a pipe thread having the largest diameter that it is possible to cut on standard pipe. Ordinarily Straight Internal Threads are used with these Straight External Threads, providing a loose fit. The dimensions of these threads are given in Table 7. It will be noted that the maximum major diameter of the external thread is slightly greater than the nominal outside diameter of the pipe. The normal manufacturer's variation in pipe diameter provides for this increase.

One application of a taper pipe thread in combination with a locknut thread which has been in use for some time is that shown in Table 7. It consists of the nipple threaded joint used to connect standpipes with the floor or wall of a water supply tank.

Gaging information for these threads is given in Section 7.

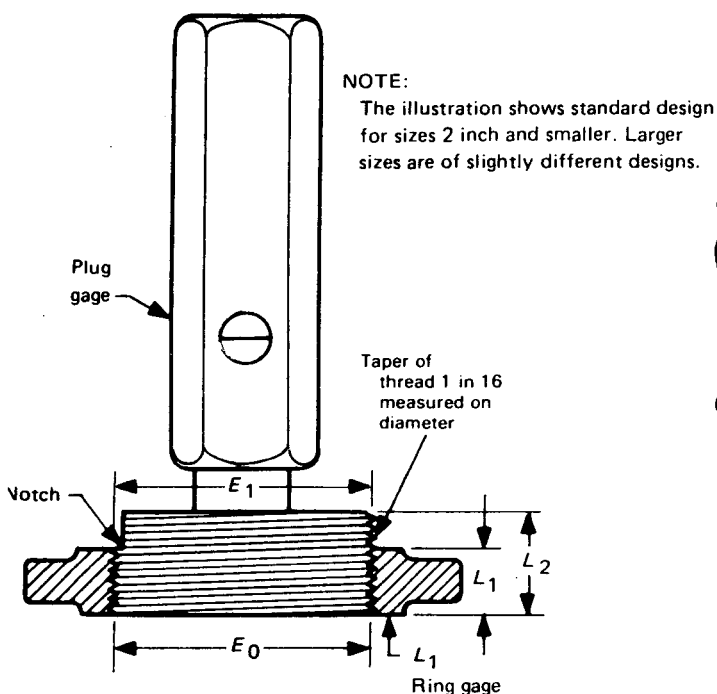


FIG. 4 NPT STANDARD TAPER PIPE THREAD
PLUG AND RING GAGES

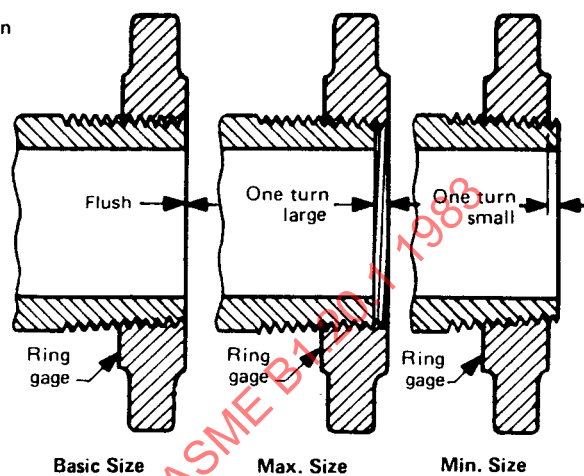


FIG. 6 GAGING EXTERNAL TAPER THREADS
WITH RING GAGE

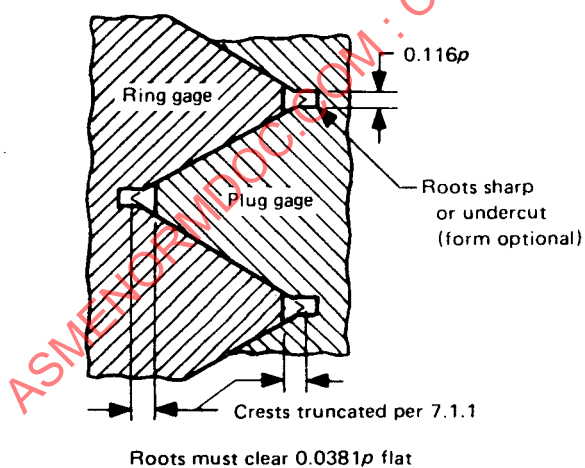


FIG. 5 SUGGESTED FORM OF GAGE THREAD



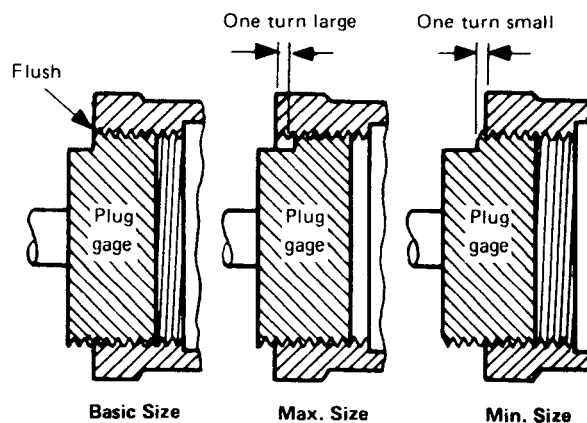


FIG. 7 GAGING INTERNAL TAPER THREADS

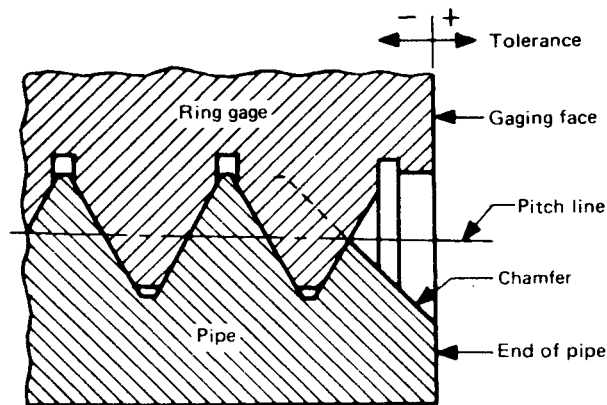

(A) Enlarged view showing chamfered external thread of basic size

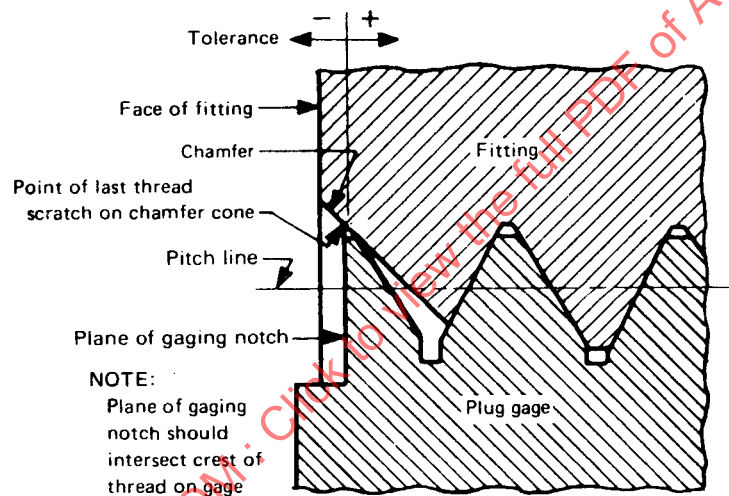

(B) Enlarged view showing chamfered internal thread of basic size with chamfer exceeding the major diameter

GENERAL NOTE:

The chamfer illustrated is at 45 deg. angle and is approximately $\frac{1}{2}$ pitch in depth. However, these details are not requirements and are given only for information on the illustration shown. The chamfered portion of thread and the full chamfer cone are indicated by dotted lines.

The reference point for the internal product thread is the starting end of the fitting, providing the chamfer does not exceed the major diameter of the internal thread. When a chamfer on the product thread exceeds this limit, the reference point becomes the last thread scratch on the chamfer cone, as illustrated. Allowance must be made for depth of counterbore on counterbored fittings.

FIG. 8 GAGING OF CHAMFERED THREADS
(See 8.4)

6.4 Loose-Fitting Mechanical Joints for Hose Couplings, NPSH

Hose coupling joints are ordinarily made with straight internal and external loose-fitting threads. There are several standards of hose threads having various diameters and pitches, one of which is based on the American National Standard Pipe Thread. By the use of this thread series, it is possible to join small hose couplings in sizes $\frac{1}{2}$ to 4, inclusive, to ends of standard pipe having American National Standard External Pipe Threads, using a gasket to seal the joint. For dimensions and tolerances, see ANSI B2.4.

7 GAGES AND GAGE TOLERANCES FOR AMERICAN NATIONAL STANDARD PIPE THREADS

7.1 Design of Gages

Gages for American National Standard Pipe Threads provide a functional check and are of the standard type as described below. Gages should conform to the designs recommended in ANSI Standard B47.1, Gage Blanks.

7.1.1 Standard Type Gages. A set of standard or basic type gages consists of a taper-threaded plug gage and a taper-threaded ring gage. See Figs. 4 and 5. The plug gages are made to dimensions given in Table 8 with a gaging notch located a distance L_1 from the small end. The L_1 ring gage has a length equal to dimension L_1 . The roots of the threads on these gages shall clear $0.0381p$ width. A sharp V or undercut clearance is acceptable. The crests are to be truncated an amount equal to $0.140p$ for 27 threads per inch (tpi), $0.109p$ for 18 tpi, and $0.100p$ for 14 tpi, 11-1/2 tpi and 8 tpi threads (see Fig. 5). In locating the basic gaging notch, the plane of the notch should intersect the crest of the gage thread.

The ring gage shall be fitted to the plug so that, when assembled handtight, the gaging notch of the plug gage will be flush with the large end face of the ring gage within tolerances as given in Table 9.

Partial end threads shall be removed on both ends of the ring gage and on the small end of the plug gage to full-form profile in order to avoid possible seating error from bent or malformed feathered edge.

7.1.2 Marking of Gages. Each gage shall be marked so as to indicate clearly the nominal size of pipe,

threads per inch, and the proper thread series designation as given in the respective section of this Standard.

7.2 Classes of Gages

Gages of the following types may be used to completely cover gage requirements:

- (a) master gages used to check working gages.
- (b) working gages used to check threads during manufacture and for conformance inspection.

7.2.1 Master Gages. The set of master gages consists of an L_1 taper threaded plug gage and an L_1 taper threaded ring gage (see Figs. 4 and 5). The plug gage is made to dimensions specified in Table 8. It is constructed of hardened steel with a gaging notch located a distance L_1 (Table 2) from the small end. The ring gage has a length equal to dimension L_1 specified in Table 8. This ring is fitted to its mating plug - seating flush at the notch within ± 0.002 in. for sizes 1/16 through 2, within ± 0.003 in. for sizes 2-1/2 through 12, and within ± 0.005 in. for sizes 14 and larger. The roots of the threads on these ring gages shall clear a $0.0381p$ flat or may be undercut beyond a sharp V . The crests of the plug and ring gage are truncated $0.100p$. The set of master gages is used for checking working gages (see 7.3.2). A supplementary check by optical means should be made of flank angle and form.

CAUTION: It should be understood that only a specifically matched set of masters (L_1 plug and L_1 ring) can be expected to mate with each other within the tolerance specified. There are many characteristics or deviations in gage elements that may combine to cause a significant standoff difference between master gages which are not specifically matched.

7.2.2 Working Gages. Each set of working gages consists of an L_1 taper threaded plug gage and an L_1 taper threaded ring gage and is used for checking the product. These gages are made of hardened steel or equivalent material to dimensions given in Table 8. (See 7.3.2 for tolerance.) In locating the basic notch of the plug gage the plane of the notch should intersect the crest of the thread.

It is to be noted that these gages are truncated at the crest so that they bear only on the flanks of the thread. Thus, although they do not check the crest or root truncations specified in Table 1, they are a satisfactory functional check for the general run of product. When it is deemed necessary to determine