

INTERNATIONAL STANDARD



**Maritime navigation and radiocommunication equipment and systems –
Digital interfaces –
Part 2: Single talker and multiple listeners, high-speed transmission**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2024 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IECNORM.COM : Click to view the full text of IEC 61000-2-2:2024 CMV



IEC 61162-2

Edition 2.0 2024-04
COMMENTED VERSION

INTERNATIONAL STANDARD



**Maritime navigation and radiocommunication equipment and systems –
Digital interfaces –
Part 2: Single talker and multiple listeners, high-speed transmission**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 47.020.70

ISBN 978-2-8322-8713-2

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	4
1 General	6
1 Scope	6
2 Normative references	6
3 Terms, definitions and abbreviated terms	7
3.1 Terms and definitions	7
3.2 Abbreviated terms	7
4 Manufacturer's documentation	7
4.1 Standard documents	7
4.2 Additional information	8
5 Hardware specification	8
5.1 General	8
5.2 Interconnecting wires	8
5.3 Conductor definitions	8
5.4 Electrical connection/shield requirements	8
5.5 Connector	9
5.6 Electrical signal characteristics	9
5.6.1 Signal state definitions	10
5.6.2 Talker drive circuits	10
5.6.3 Listener receive circuits	10
5.6.4 Electrical isolation	10
5.6.5 Maximum voltage on the bus	10
6 Data transmission	10
7 Data format protocol	11
5.1 Characters	11
5.2 Fields	11
5.3 Sentences	11
5.4 Error detection and handling	11
8 Data content	16
9 Applications	16
10 Methods of testing and required test results	16
10.1 Test preparation	16
10.1.1 General	16
10.1.2 Testing under ambient conditions	16
10.2 Test sequence	16
10.3 Standard test signals	16
10.4 Test of the interface	17
10.4.1 Electrical test of the interface	17
10.4.2 Protocol test of input and output	17
10.4.3 Test under maximum interface workload	17
Annex A (informative) IMO resolutions and ITU recommendations and relevant IEC/ISO standards to which this standard applies for maritime navigation and radiocommunication equipment and systems	18
Annex B (informative) Glossary	18
Bibliography	28
List of comments	29

Figure 1 – Talker/listener connections.....	8
Figure 2 – Cables – Electrical shield requirements	9
Figure 3 – Data transmission format	10

Table A.1 – Navigation	
Table A.2 – Radiocommunications for the global maritime distress and safety system (GMDSS)	

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MARITIME NAVIGATION AND RADIOCOMMUNICATION
EQUIPMENT AND SYSTEMS – DIGITAL INTERFACES –****Part 2: Single talker and multiple listeners,
high-speed transmission**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

This commented version (CMV) of the official standard IEC 61162-2:2024 edition 2.0 allows the user to identify the changes made to the previous IEC 61162-2:1998 edition 1.0. Furthermore, comments from IEC TC 80 experts are provided to explain the reasons of the most relevant changes, or to clarify any part of the content.

A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text. Experts' comments are identified by a blue-background number. Mouse over a number to display a pop-up note with the comment.

This publication contains the CMV and the official standard. The full list of comments is available at the end of the CMV.

IEC 61162-2 has been prepared by IEC technical committee 80: Maritime navigation and radiocommunication equipment and systems. It is an International Standard.

This second edition cancels and replaces the first edition published in 1998. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) alternative hardware is given in 5.1 which may now be as specified in this document or as specified in IEC 61162-1;
- b) the data transmission rate given in Clause 6 is now configurable. The default remains as 38 400 (bits/s) but higher rates may be provided;
- c) the description of the data format protocol has been removed as this information is given in IEC 61162-1;
- d) former Annex A and Annex B have been deleted as now of historic interest.

The text of this International Standard is based on the following documents:

Draft	Report on voting
80/1065/CDV	80/1083/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

MARITIME NAVIGATION AND RADIOCOMMUNICATION EQUIPMENT AND SYSTEMS – DIGITAL INTERFACES –

Part 2: Single talker and multiple listeners, high-speed transmission

~~1~~ **General**

1 Scope

This part of IEC 61162 contains the requirements for data communication between maritime electronic instruments, navigation and radiocommunication equipment when interconnected via an appropriate interface.

This document is intended to support one-way serial data transmission from a single talker to one or more listeners. This data is in printable ASCII form and ~~may~~ can include any information as specified by approved sentences or information coded according to the rules for proprietary sentences. Typical messages ~~may~~ can be from 11 to a maximum of 79 characters in length and generally require repetition rates up to once per 20 ms.

The electrical definitions in this document are intended to accommodate higher data rates than are specified in IEC 61162-1. Since there is no provision for guaranteed delivery of messages and only limited error-checking capability, it is important this document ~~should be~~ is used with caution in all safety applications.

~~Annex A contains a list of relevant IMO resolutions and ITU recommendations to which this standard applies.~~ **1**

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60945:1996, *Maritime navigation and radiocommunication equipment and systems – General requirements – Methods of testing and required test results*

IEC 61162-1:1995, *Maritime navigation and radiocommunication equipment and systems – Digital interfaces – Part 1: Single talker and multiple listeners*

ITU-T Recommendation X.27/V.11:1996, *Electrical characteristics for balanced double-current interchange circuits operating at data signalling rates up to 10 Mbits/s*

~~NMEA 0183 – Version 2.30:1998, National marine electronics association (USA) – Standard for interfacing marine electronic navigational devices~~ **2**

~~EIA 485:1991, Electrical characteristics of generators and receivers for use in balanced digital multipoint systems~~ **2**

3 Terms, definitions and abbreviated terms

~~Common terms are defined in the glossary of annex B. Where there is a conflict, terms shall be interpreted, wherever possible, in accordance with the references in 1.2.~~

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1 Terms and definitions

3.1.1

talker

~~any~~ device which sends data to other devices

Note 1 to entry: The type of talker is identified by a two-character mnemonic as listed in IEC 61162-1.

3.1.2

listener

~~any~~ device which receives data from another device

3.1.3

latency

time interval between an event and its resulting information, including time for processing, transmission and/or reception

3.2 Abbreviated terms **3**

EMC electromagnetic compatibility

EUT equipment under test

4 Manufacturer's documentation

4.1 Standard documents

~~Operator~~ Installation manuals ~~or other appropriate literature~~ **4** provided for equipment that is intended to meet the requirements of this document shall contain as a minimum the following information:

- a) identification of the A, B and common (C) signal lines (see Figure 1);
- b) the output drive capability as a talker;
- c) a list of approved sentences, noting unused fields, proprietary sentences transmitted as a talker, data latency and transmission interval for each sentence;
- d) the load requirements as a listener;
- e) a list of sentences and associated data fields that are required by, or are acceptable to, a listener;
- f) the current software and hardware revision, if this is relevant to the interface;
- g) an electrical description or schematic of the listener/talker input/output circuits citing actual components and devices used, including connector type and part number;
- h) the version number and date of update of the standard for which compliance is sought;
- i) list of supported baud rates (bits/s) including any limitations per each baud rate supported. **5**

4.2 Additional information

As latency, filtering, error handling and data transmission interval can have a serious influence on the performance of a system, the manufacturer shall ~~give careful consideration to~~ consider these aspects. Documentation should include such data where applicable.

5 Hardware specification

5.1 General


One talker and multiple listeners may be connected in parallel over interconnecting wires. Because of EMC requirements, shielded cables are recommended. The number of listeners depends on the output capability, the input drive requirements of the connected devices, and on the use of termination resistors.

Two alternatives apply for the hardware:

- 1) method based on 5.2 to 5.6;
- 2) method based on IEC 61162-1. **6**

5.2 Interconnecting wires

Interconnection between devices may be by means of a shielded two-conductor twisted-pair wire (A, B) plus any means to secure common signal ground potential (C) for transmitting and receiving devices. For this purpose, a third wire additional to the twisted pair or the inner shield of double-shielded cable with insulated shields may be used.

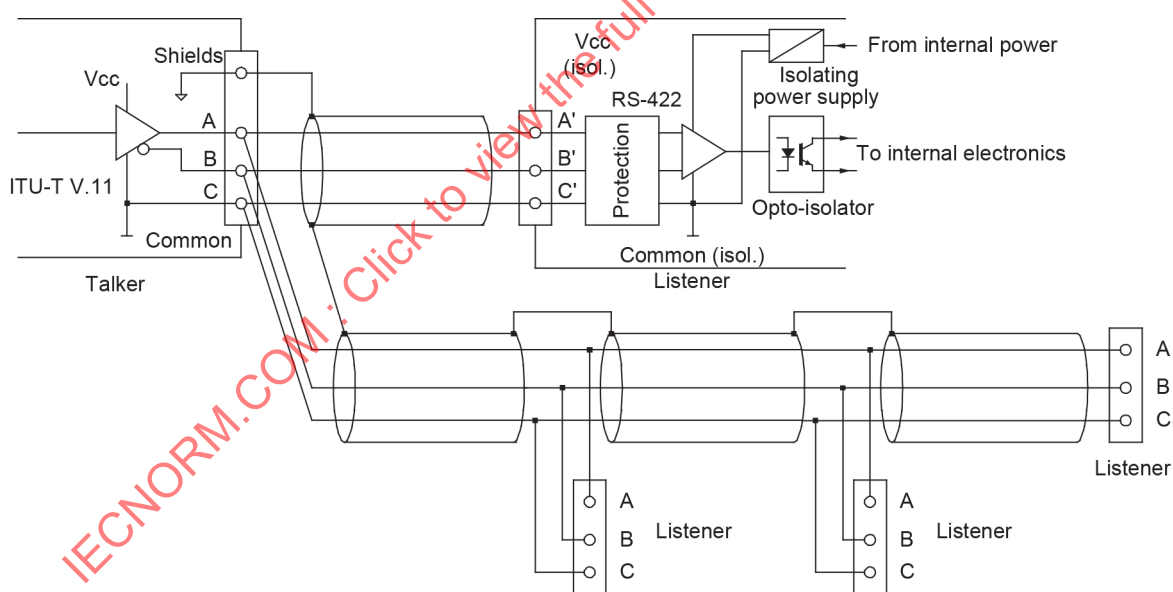

IEC

Figure 1 – Talker/listener connections

5.3 Conductor definitions

The conductors referred to in this document are the signal lines A, B, C (common) and shield.

5.4 Electrical connection/shield requirements

All signal and common line connections A, B and C are connected in parallel.

With single-shielded cables and a separate wire as common line C (signal ground), the shield shall be connected to the talker chassis and shall not be connected to any listener. However, the shield shall be continuous (unbroken) between all listeners – see Figure 1 and Figure 2 a).

With double-shielded cables and the inner shield used as common line C (signal ground), the outer shield shall be connected to the talker chassis and shall not be connected to any listener. However, the outer shield shall be continuous (unbroken) between all listeners – see Figure 1 and Figure 2 b).

With double-shielded cables and a separate wire as common line C (signal ground), the inner shield shall be connected to the talker chassis and shall not be connected to any listener. However, the inner shield shall be continuous (unbroken) between all listeners. The outer shield may be connected to the chassis on either side if required – see Figure 1 and Figure 2 c).

The cabling shall be designed in a way that stubs are avoided or kept as short as possible. If long cables are necessary, termination at the end of the line according to ITU-T Recommendation X.27/V.11 shall be considered.

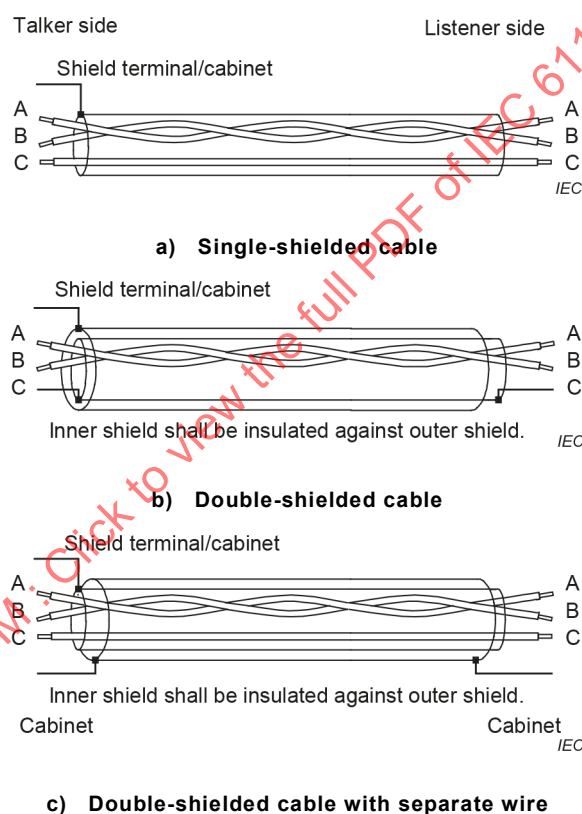


Figure 2 – Cables – Electrical shield requirements

5.5 Connector

No standard connector is specified. Wherever possible, readily available commercial connectors shall be used. Manufacturers shall provide means for user identification of the connections used.

5.6 Electrical signal characteristics

~~This subclause describes the electrical characteristics of transmitters and receivers.~~ **7**

5.6.1 Signal state definitions

The idle, marking, logical 1, OFF or stop bit state is defined by a negative voltage on line A with respect to line B, as in IEC 61162-1.

The active, spacing, logical 0, ON or start bit state is defined by a positive voltage on line A with respect to line B, as in IEC 61162-1.

5.6.2 Talker drive circuits

No provision is made for more than a single talker to be connected to the bus. The drive circuit shall meet, as a minimum, the requirements of ITU-T Recommendation X.27/V.11.

Improved and compatible driver circuits (e.g. ~~EIA~~ TIA-485) used in a compliant way are allowed.

5.6.3 Listener receive circuits

Multiple listeners may be connected to a single talker. The listener's receive circuit shall comply with ITU-T Recommendation X.27/V.11. Optional termination resistors for the line shall be provided. The input terminals A, B and C shall be electrically isolated from the remaining electronics of the listening device. Reference is made to 5.6.4 and a sample circuit shown in Figure 1.

5.6.4 Electrical isolation

Within a listener, there shall be no direct electrical connection between the signal lines A and B, the signal ground C or the shield to ship's mains ground or power line. This isolation shall be in accordance with IEC 60945.

5.6.5 Maximum voltage on the bus

The maximum applied voltage between signal lines A and B and between either line and ground C shall be in accordance with ITU-T Recommendation X.27/V.11.

For protection against miswiring and for unintended connection to earlier talker designs, all receive circuit devices shall be capable of withstanding 15 V between ~~either~~ signal lines A and B and between either line and ground for an indefinite period.

6 Data transmission

Data is transmitted in serial asynchronous form in accordance with ~~4.2~~ IEC 61162-1 **8**. The first bit is a start bit and is followed by data bits, least-significant-bit first as in Figure 3.

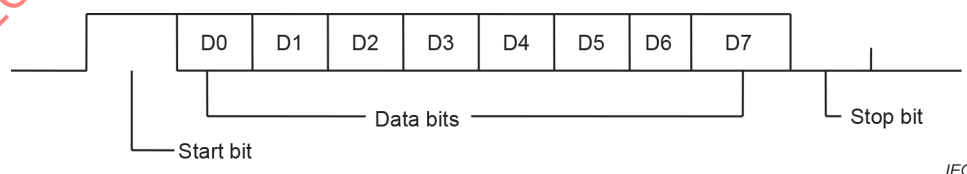


Figure 3 – Data transmission format

The following parameters are used:

- baud rate default and required is 38 400 (bits/s), higher baud rates are allowed based on equipment configuration setup; **5**
- data bits 8 (D7 = 0), parity none;
- stop bits 1.

7 Data format protocol

5.1 Characters

~~All transmitted data shall be interpreted as ASCII characters. The most significant bit of the eight-bit character shall always be transmitted as zero (D7 = 0).~~

5.1.1 Reserved characters

~~The reserved character set consists of those ASCII characters shown in 6.1 (table 1) of IEC 61162-1. These characters are used for specific formatting purposes, such as sentence and field delimiting, and shall not be used in data fields.~~

5.1.2 Valid characters

~~The valid character set consists of all printable ASCII characters (HEX 20 to HEX 7E) except those defined as reserved characters. The list of the valid character set is given in 6.1 (table 2) of IEC 61162-1.~~

5.1.3 Undefined characters

~~ASCII values not specified as either reserved characters or valid characters are excluded and shall not be transmitted at any time.~~

5.1.4 Character symbols

~~When individual characters are used in this standard to define units of measurement, to indicate the type of data field, type of sentence, etc., they shall be interpreted according to the character symbol in 6.1 (table 3) of IEC 61162-1.~~

5.2 Fields

~~A field consists of a string of valid characters, or no characters (null field), located between two appropriate delimiter characters.~~

5.2.1 Address field

~~An address field is the first field in a sentence and follows the "\$" delimiter; it serves to define the sentence. Characters within the address field are limited to digits and upper-case letters. The address field shall not be a null field. Only sentences with the following three types of address fields shall be transmitted.~~

5.2.1.1 Approved address field

~~Approved address fields consist of five characters defined by this standard. The first two characters are the talker identifier, listed in 6.2 (table 4) of IEC 61162-1. The next three characters form the sentence formatter used to define the format and the type of data. A list of approved sentence formatters is given in 6.2 (table 5) of IEC 61162-1.~~

5.2.1.2 Query address field

~~The query address field consists of five characters and is used for the purpose of requesting transmission of a specific sentence on a separate bus from an identified talker.~~

5.2.1.3 Proprietary address field

~~The proprietary address field consists of the proprietary character P followed by a three-character manufacturer's mnemonic code, used to identify the talker issuing a proprietary sentence, and any additional characters as required. A list of valid manufacturer's mnemonic codes may be obtained from NMEA.~~

5.2.2 Data fields

Data fields in approved sentences follow a ";" delimiter and contain valid characters in accordance with the formats illustrated in 6.2 (table 6) of IEC 61162-1. Data fields in proprietary sentences contain only valid characters but are not defined by this standard.

Because of the presence of variable data fields and null fields, specific data fields shall only be located within a sentence by observing the field delimiters ";". Therefore, it is essential for the listener to locate fields by counting delimiters rather than counting the total number of characters received from the start of the sentence.

5.2.2.1 Variable length fields

Although some data fields are defined to have fixed length, many are of variable length in order to allow devices to convey information and to provide data with more or less precision, according to the capability or requirements of a particular device.

Variable length fields may be alpha-numeric or numeric fields. Variable numeric fields may contain a decimal point and may contain leading or trailing zeros.

5.2.2.2 Data field types

Data fields may be alpha, numeric, alphanumeric, variable length, fixed length, fixed/variable (with a portion fixed in length while the remainder varies). Some fields are constant, with their value dictated by a specific sentence definition. The allowable field types are summarized in 6.2 (table 6) of IEC 61162-1.

5.2.2.3 Null fields

A null field is a field of length zero, i.e. no characters are transmitted in the field. Null fields shall be used when the value is unreliable or not available.

For example, if heading information were not available, sending data of "000" is misleading because a user cannot distinguish between "000" meaning no data and a legitimate heading of "000". However, a null field, with no characters at all, clearly indicates that no data is being transmitted.

Null fields with their delimiters can have the following appearance depending on where they are located in the sentence:

"", "" "", ""**

The ASCII NULL character (HEX 00) shall not be used as the null field.

5.2.3 Checksum field

A checksum field shall be transmitted in any sentence. The checksum field is the last field in a sentence and follows the checksum delimiter character "**". The checksum is the eight bit exclusive OR (no start or stop bits) of all characters in the sentence, including ";" delimiters, between but not including the "\$" and the "**" delimiters.

The hexadecimal of the most significant and least significant four bits of the result is converted to two ASCII characters (0-9, A-F) for transmission. The most significant character is transmitted first.

Examples of the checksum field are: \$GPGLL,5057.970,N,00146.110,E,142451,A*27 and \$GPVTG,089.0,T,15.2,N,7F.

5.3 Sentences

This subclause describes the general structure of sentences. Details of specific sentence formats are found in 6.3 of IEC 61162-1. Some sentences may specify restrictions beyond the general limitations given in this part of this standard. Such restrictions may include defining some fields as fixed length, numeric or text only, required to be non-null, transmitted with a certain frequency, etc.

The maximum number of characters in a sentence shall be 82, consisting of a maximum of 79 characters between the starting delimiter "\$" and the terminating delimiter <CR> <LF>.

The minimum number of fields in a sentence is one (1). The first field shall be an address field containing the identity of the talker and the sentence formatter which specifies the number of data fields in the sentence, the type of data they contain and the order in which the data fields are transmitted. The remaining portion of the sentence may contain zero or multiple data fields.

The maximum number of fields allowed in a single sentence is limited only by the maximum sentence length of 82 characters. Null fields may be present in the sentence and shall always be used if data for that field is unavailable.

All sentences begin with the sentence starting delimiter character "\$" and end with the sentence terminating delimiter <CR> <LF>.

5.3.1 Description of approved sentences

Approved sentences are those designed for general use and detailed in this standard. Approved sentences are listed in 6.3 of IEC 61162-1 and shall be used wherever possible. Other sentences, not recommended for new designs, may be found in practice. Such sentences are listed in NMEA 0183. Information on such sentences may be obtained from NMEA (see 5.3.3).

An approved sentence contains, in the order shown, the following elements:

ASCII	HEX	Description
"\$"	24	start of sentence
<address field>		talker identifier and sentence formatter
"," <data field>		zero or more data fields
"," <data field>		
"*" <checksum field>		checksum field
<CR> <LF>	0D 0A	end of sentence

5.3.1.1 Approval sentence structure

The following provides a summary explanation of the approved sentence structure:

\$acccc,c—c*hh<CR> <LF>

ASCII	HEX	Description
"\$"	24	Start of sentence: starting delimiter
acccc		Address field: alphanumeric characters identifying type of talker, and sentence formatter. The first two characters identify the talker. The last three are the sentence formatter mnemonic code identifying the data type and the string format of the successive fields. Mnemonics will be used as far as possible to facilitate read-outs by users.

" ,	2C	Field delimiter: starts each field except address and checksum fields. If it is followed by a null field, it is all that remains to indicate no data in a field.
c c		Data sentence block: follows address field and is a series of data fields containing all of the data to be transmitted. Data field sequence is fixed and identified by third and subsequent characters of the address field (the sentence formatter). Data fields may be of variable length and are preceded by delimiters " ,".
"*"	2A	Checksum delimiter: follows last data field of the sentence. It indicates that the following two alphanumeric characters show the HEX value of the checksum.
hh		Checksum field: the absolute value calculated by exclusive OR'ing the eight data bits (no start bits or stop bits) of each character in the sentence, between, but excluding "\$" and "*". The hexadecimal value of the most significant and least significant four bits of the result are converted to two ASCII characters (0-9, A-F) for transmission. The most significant character is transmitted first.

~~<CR> <LF> 0D 0A End of sentence: sentence terminating delimiter.~~

~~5.3.2 Query sentences~~

~~Query sentences are intended to request approved sentences to be transmitted in a form of two-way communication. The use of query sentences implies that the listener shall have the capability of being a talker with its own bus.~~

~~The approved query sentence contains, in the order shown, the following elements:~~

ASCII	HEX	Description
"\$"	24	start of sentence
<aa>		talker identifier of requester
<aa>		talker identifier for device from which data is being requested
"Q"		query character identifies query address
" ,		data field delimiter
<ccc>		approved sentence formatter of data being requested
"*" <checksum field>		checksum field
<CR> <LF>	0D 0A	end of sentence

~~5.3.2.1 Reply to query sentence~~

~~The reply to a query sentence is the approved sentence that was requested. The use of query sentences requires cooperation between the devices that are interconnected. A reply to a query sentence is not mandatory and there is no specified time delay between the receipt of a query and the reply.~~

~~5.3.3 Proprietary sentences~~

~~These are sentences not included within this standard; these provide a means for manufacturers to use the sentence structure definitions of this standard to transfer data which does not fall within the scope of approved sentences. This will generally be for one of the following reasons:~~

- ~~a) Data is intended for another device from the same manufacturer, is device specific, and not in a form or of a type of interest to the general user.~~

- ~~b) Data is being used for test purposes prior to the adoption of approved sentences.~~
- ~~c) Data is not of a type and general usefulness which merits the creation of an approved sentence.~~

~~— The manufacturer's reference list of mnemonic codes is a component of the equivalent specification NMEA 0183.*~~

~~A proprietary sentence contains, in the order shown, the following elements:~~

ASCII	HEX	Description
"\$"	24	start of sentence
"P"	50	proprietary sentence ID
<aaa>		manufacturer's mnemonic code
<address field>		talker identifier and sentence formatter
<valid characters, manufacturer's data>		
"*" <checksum field>		checksum field
<CR> <LF>	0D 0A	end of sentence

~~Beyond limiting overall sentence length and requiring the use of only valid characters, details of proprietary data fields are not included in this standard. However, it is required that such sentences be published in the manufacturer's manuals for reference.~~

~~5.3.4 Valid sentences~~

~~Approved sentences, query sentences and proprietary sentences are the only valid sentences. Sentences of any other form are non valid and shall not be transmitted on the bus.~~

~~5.3.5 Sentence transmission timing~~

~~Frequency of sentence transmission shall be consistent with the basic measurement or calculation cycle but generally not more frequently than once per 20 ms.~~

~~It is desirable that sentences be transmitted with a minimum inter character spacing, preferable as near continuous burst, but under no circumstances shall the time to complete the transmission of a sentence be greater than 100 ms.~~

~~5.3.6 Additions to approved sentences~~

~~In order to allow for improvements or additions, future revisions of this standard may modify existing sentences by adding new data fields after the last data field but before the checksum delimiter character "*" and checksum field. Listeners shall determine the end of the sentence by recognition of "<CR> <LF>" and "*" rather than by counting field delimiters. The checksum value shall be computed on all received characters between, but not including, "\$" and "*" whether or not the listener recognizes all fields.~~

~~5.4 Error detection and handling~~

~~Listening devices shall detect errors in data transmission including:~~

- ~~— checksum error;~~
- ~~— invalid characters;~~

~~* The NMEA secretariat maintains the master reference list which comprises codes registered and formally adopted by NMEA.~~

~~— incorrect length of talker identifier and/or formatter;~~
~~— time out.~~

~~Listening devices shall use only correct sentences.~~ **9**

Refer to IEC 61162-1.

8 Data content

~~This clause is identical with clause 6 of IEC 61162-1.~~

Refer to IEC 61162-1. **10**

9 Applications

~~This clause is identical with clause 7 of IEC 61162-1. For the purpose of compatibility with that standard, in case of modifications, no dedicated specification is made in this standard.~~

Refer to IEC 61162-1. **10**

10 Methods of testing and required test results

10.1 Test preparation

10.1.1 General

The manufacturer shall, unless otherwise agreed, set up the EUT (equipment under test) as well as all necessary test equipment and ensure that it is operational before testing commences. The manufacturer shall provide sufficient technical documentation of the EUT.

10.1.2 Testing under ambient conditions

All tests shall be carried out under the ambient conditions defined in the specific standard for the EUT. If no ambient conditions are defined, the temperature range between +10 °C and +35 °C shall be applied.

10.2 Test sequence

Where appropriate, tests against different subclauses of this document may be carried out simultaneously.

10.3 Standard test signals

For testing transmitting interfaces, those standard IEC 61162 sentences and proprietary messages shall be used which the EUT transmits during normal operation.

For testing receiving interfaces of the EUT, those IEC 61162 sentences and proprietary messages shall be applied which are received/used by the EUT during its normal operation.

10.4 Test of the interface

10.4.1 Electrical test of the interface

10.4.1.1 Normal operation range

For compatibility of the hardware, standard tests shall be used as defined in ITU-T Recommendation X.27/V.11. The electrical isolation of input circuits shall be checked by inspection of the manufacturer's documentation and tests according to the values given in IEC 60945.

10.4.1.2 Ability of input circuits to withstand maximum voltage on the bus

Between the connectors 'A', 'B' and 'C' of the interface, a voltage of 15 V shall be applied for at least 1 min. Each test shall be carried out with both polarities of the applied test voltage. After all tests, the function and the hardware of the interface shall be checked for any reading errors or damage.

10.4.2 Protocol test of input and output

The transmitting output of the EUT shall be checked for conformity with the coding methods of data as specified in this document and the proprietary sentences of the manufacturer by inspection of the manufacturer's documentation.

The receiver of the EUT shall be tested, by connecting it to a source which transmits all sentences which the EUT is able to receive. All sentences shall be detected and no error shall occur. These tests shall be executed at least using the default baud rate (38 400 bits/s). If higher baud rates are provided, then these tests shall be repeated at least for highest baud rate at longest specified distance. If available, other baud rates and distances may be selected by the inspector for sample testing. **5**

10.4.3 Test under maximum interface workload

After activating all ports of the EUT with the maximum number of sentences to be transmitted and/or received, the data repetition rate(s) shall not decrease under the value specified by the manufacturer, and the data transmission time for one sentence shall not exceed 100 ms.

For input circuits, no data-reading errors shall be detected under maximum interface workload.

Annex A- 1
(informative)

**IMO resolutions and ITU recommendations and
relevant IEC/ISO standards to which this standard applies
for maritime navigation and radiocommunication
equipment and systems**

Table A.1 – Navigation

Navigation instrument	Talker	Listener	IMO resolution	IEC/ISO standards
IMO mandatory				
Magnetic compass	YES	NO	A.382(X)	ISO 449 ISO 2269
Gyro compass	YES	YES	A.424(XI)	ISO 8728
Gyro compass (high-speed craft)	YES	YES	A.824(19)	ISO 8728**
Radar	YES	YES	MSC 64(67)	IEC 60936-1
Radar (high-speed craft)	YES	YES	A.820(19)	IEC 60936-2**
ARPA	YES	YES	A.823(19)	IEC 60872-1
Echo-sounder	YES	YES	A.224(VIII)	ISO 9875
SDME(LOG)	YES	NO	A.824(19)	IEC 61023
R.O.T.I.	YES	NO	A.526(13)	
RDF	YES	YES	A.665(16)	
IMO optional				
OMEGA + Differential	YES	YES	A.479(XII)	IEC 61110
LORAN-C/CHAYKA receiver	YES	YES	A.818(19)	IEC 61075*
DECCA receiver	YES	YES	A.816(19)	IEC 61135
GPS receiver	YES	YES	A.819(19)	IEC 61108-1
GLONASS	YES	YES	MSC 53(66)	IEC 61108-2**
Differential GPS/GLONASS	YES	YES	MSC 64(67)	IEC 61108-4**
Combined GPS/GLONASS	YES	YES	MSC ZZ(69)**	IEC 61108-3**
Autopilot (heading control)	YES	YES	MSC 64(67)	IEC/ISO 11674**
Autopilot (high-speed craft)	YES	YES	A.822(19)	IEC/ISO 11674**
ECDIS	YES	YES	A.817(19)	IEC 61174**
* — Under revision				
** — Under development				

Table A.2 — Radiocommunications for the global maritime distress and safety system (GMDSS)

1988 SOLAS	IMO resolution	ITU-R recommendation	INMARSAT COSPAS-SARSAT	IEC standard*
1 — Primary systems				
1.1 — VHF radio installation	A.803(19)			61097-8
— DSC	A.609(15)	493,541,689		61097-3
— RT	A.385(X)	RR appendix 19		61097-7
1.2 — MF radio installation	A.804(19)			61097-8
— DSC	A.610(15)	493,541		61097-3
— RT	A.334(IX)			61097-9
	A.613(15)			
1.3 — MF/HF radio installation	A.806(19)			61097-8
— DSC	A.610(15)	493,541		61097-3
— RT	A.334(IX)			61097-9
— NBDP	A.613(15)	491,492,625		61097-11
1.4 — INMARSAT ship earth station	A.570(14)		SDM	61097-4
	A.663(16)			
	A.698(17)			
	A.807(19)			
	A.808(19)			
2 — Secondary means of alerting				
3 — Facilities for reception of maritime safety information				
3.1 — NAVTEX receiver (518 kHz)	A.525(13)	540,625		61097-6
3.2 — EGC receiver	A.664(16)		SDM	61097-6
3.3 — HF NBDP receiver	A.700(17)	491,492,625,688		61097-11
4 — Satellite E.P.I.R.B.				
4.1 — COSPAS-SARSAT (406 MHz)	A.662(16)	633	C/S-T-001	61097-2
	A.763(18)			
	A.810(19)			
4.2 — INMARSAT	A.661(16)	632	SDM	61097-5
	A.812(19)			
5 — VHF E.P.I.R.B.	A.612(15)	693		
	A.805(19)			
6 — Ships radar transponder (SART)	A.530(13)	628		61097-1
	A.802(19)			
7 — RT watch receiver	A.383(X)	489,583,689,1082		61097-8
8 — RT alarm signal	A.412(XI)	219		61097-16
9 — VHF portable (survival craft)	A.605(15)			61097-12
	A.762(18)			
	A.809(19)			
10 — General requirements	A.694(17)			60945
11 — Reserve source of energy	SOLAS IV-13			61097-14
* The IEC 61097 series is currently being developed. Some parts have been published — the remainder are under development or under consideration. Clause A.1 includes all those parts published.				

A.1 — Reference documents

IEC 60872:1987, *Marine automatic plotting aids (ARPA) — Operational requirements — Methods of testing and test results*
Amendment 1 (1991)

~~IEC 60936:1988, Shipborne radar—Operational and performance requirements—Methods of tests and required test results~~

~~IEC 60945:1996, Maritime navigation and radiocommunication equipment and systems—General requirements—Methods of testing and required test results~~

~~IEC 61023:1990, Marine speed and distance measuring equipment (SDME)—Operational and performance requirements—Methods of testing and required test results~~

~~IEC 61075:1991, Loran-C receivers for ships—Minimum performance standards—Methods of testing and required test results~~

~~IEC 61097-1:1992, Global maritime distress and safety system (GMDSS)—Part 1: Radar transponder—Marine search and rescue (SART)—Operational and performance requirements, methods of testing and required test results (includes list of possible 16 parts in informative annex)~~

~~IEC 61097-2:1994, Global maritime distress and safety system (GMDSS)—Part 2: COSPAS-SARSAT EPIRB—Satellite emergency position indicating radio beacon operating on 406 MHz—Operational and performance requirements, methods of testing and required test results~~

~~IEC 61097-3:1994, Global maritime distress and safety system (GMDSS)—Part 3: Digital selective calling (DSC) equipment—Operational and performance requirements, methods of testing and required testing results~~

~~IEC 61097-4:1994, Global maritime distress and safety system (GMDSS)—Part 4: INMARSAT-C ship earth station and INMARSAT enhanced group call (EGC) equipment—Operational and performance requirements, methods of testing and required test results~~

~~IEC 61097-5:1997, Global maritime distress and safety system (GMDSS)—Part 5: INMARSAT-E—Emergency position indicating radio beacon (EPIRB) operating through the INMARSAT system—Operational and performance requirements, methods of testing and required test results~~

~~IEC 61097-6:1995, Global maritime distress and safety system (GMDSS)—Part 6: Narrowband direct-printing telegraph equipment for the reception of navigational and meteorological warnings and urgent information to ships (NAVTEX)—Operational and performance requirements, methods of testing and required test results~~

~~IEC 61097-7:1996, Global maritime distress and safety system (GMDSS)—Part 7: Shipborne VHF radiotelephone transmitter and receiver—Operational and performance requirements, methods of testing and required test results~~

~~IEC 61097-9:1997, Global maritime distress and safety system (GMDSS)—Part 9: Shipborne transmitters and receivers for use in the MF and HF bands suitable for telephony, digital selective calling (DSC) and narrow band direct printing (NBDP)—Operational and performance requirements, methods of testing and required test results~~

~~IEC 61097-12:1996, Global maritime distress and safety system (GMDSS)—Part 12: Survival craft portable two-way VHF radiotelephone apparatus—Operational and performance requirements, methods of testing and required test results~~

~~IEC 61108-1:1996, Global navigation satellite systems (GNSS)—Part 1: Global positioning system (GPS)—Performance standards, methods of testing and required test results~~

~~IEC 61110:1992, System Omega and differential Omega receivers for ships—Operational and performance requirements—Methods of testing and required test results~~

~~IEC 61135:1992, Decca navigator system: Receivers for ships—Minimum performance standards—Methods of testing and required test results~~

~~ISO/IEC 11674:—, Ships and marine technology—Automatic pilots (under development)~~

~~ISO 449:1997, Ships and marine technology—Magnetic compasses, binnacles and azimuth reading devices—Class A~~

~~ISO 2269:1992, Shipbuilding—Class A magnetic compasses, azimuth reading devices and binnacles—Tests and certification~~

~~ISO 8728:1997, Ships and marine technology—Marine gyro compasses~~

~~ISO 9875:1996, Ships and marine technology—Marine echo-sounding equipment~~

~~IMO A.224:1971, Performance standards for echo-sounding equipment~~

~~IMO A.334:1975, Recommendation on operational standards for radiotelephone transmitters and receivers~~

~~IMO A.342:1975, Recommendation on performance standards for automatic pilots~~

~~IMO A.382:1977, Magnetic compasses; carriage and performance standards~~

~~IMO A.383:1977, Operational standards for radiotelephone watch receivers~~

~~IMO A.385:1977, Operational standards for VHF radiotelephone installations~~

~~IMO A.421:1979, Operational standards for radiotelephone alarm signal generators~~

~~IMO A.422:1979, Performance standards for automatic radar plotting aids (ARPA)~~

~~IMO A.424:1979, Performance standards for gyro compasses~~

~~IMO A.477:1981, Performance standards for radar equipment~~

~~IMO A.478:1981, Performance standards for devices to indicate speed and distance~~

~~IMO A.479:1981, Performance standards for shipborne receivers for use with differential Omega~~

~~IMO A.524:1983, Performance standards for VHF multiple watch facilities~~

~~IMO A.525:1983, Performance standards for narrow-band direct printing telegraph equipment for the reception of navigational and meteorological warnings and urgent information to ships~~

~~IMO A.526:1983, Performance standards for rate-of-turn indicators~~

~~IMO A.530:1983, Use of radar transponders for search and rescue purposes~~

~~IMO A.570:1985, Type approval of ship earth stations~~

~~IMO A.605:1987, Performance standards for survival craft two-way VHF radiotelephone apparatus~~

~~IMO A.609:1987, Performance standards for shipborne VHF radio installations capable of voice communication and digital selective calling~~

~~IMO A.610:1987, Performance standards for shipborne MF radio installations capable of voice communication and digital selective calling~~

~~IMO A.612:1987, Performance standards for float-free VHF emergency position-indicating radio beacons~~

~~IMO A.613:1987, Performance standards for shipborne MF/HF radio installations capable of voice communication, narrow band direct printing and digital selective calling~~

~~IMO A.661:1989, Performance standards for float free satellite emergency position indicating radio beacons operating through the geostationary INMARSAT satellite system on 1,6 GHz~~

~~IMO A.662:1989, Performance standards for float free release and activation arrangements for emergency radio equipment~~

~~IMO A.663:1989, Performance standards for INMARSAT standard C ship earth stations capable of transmitting and receiving direct printing communications~~

~~IMO A.664:1989, Performance standards for enhanced group call equipment~~

~~IMO A.665:1989, Performance standards for radio direction finding systems~~

~~IMO A.694:1991, General requirements for shipborne radio equipment forming part of the global maritime distress and safety system (GMDSS) and for electronic navigational aids~~

~~IMO A.697:1991, Performance standards for survival craft radar transponders for use in search and rescue operations~~

~~IMO A.698:1991, Performance standards for ship earth stations capable of two-way communications~~

~~IMO A.700:1991, Performance standards for narrow band direct printing telegraph equipment for the reception of navigational and meteorological warnings and urgent information to ships (MSI by HF)~~

~~IMO A.762:1993, Performance standards for survival craft two-way VHF radiotelephone apparatus~~

~~IMO A.763:1993, Performance standards for float free satellite emergency position indicating radio beacons (EPIRBs) operating on 406 MHz~~

~~IMO A.802:1995, Performance standards for survival craft radar transponders for use in search and rescue operations~~

~~IMO A.803:1995, Performance standards for shipborne VHF radio installations capable of voice communication and digital selective calling~~

~~IMO A.804:1995, Performance standards for shipborne MF radio installations capable of voice communication and digital selective calling~~

~~IMO A.805:1995, Performance standards for float-free VHF emergency position-indicating radio beacons~~

~~IMO A.806:1995, Performance standards for shipborne MF/HF radio installations capable of voice communication, narrow band direct printing and digital selective calling~~

~~IMO A.807:1995, Performance standards for INMARSAT-C ship earth stations capable of transmitting and receiving direct printing communications~~

~~IMO A.808:1995, Performance standards for ship earth stations capable of two-way communications~~

~~IMO A.809:1995, Performance standards for survival craft two-way VHF radiotelephone apparatus~~

~~IMO A.810:1995, Performance standards for float free satellite emergency position indicating radio beacons (EPIRB's) operating on 406 MHz~~

~~IMO A.812:1995, Performance standards for float free satellite emergency position indicating radio beacons operating through the geostationary INMARSAT satellite system on 1,6 GHz~~

~~IMO A.816:1995, Performance standards for shipborne DECCA NAVIGATOR receivers~~

~~IMO A.817:1995, Performance standards for electronic chart display and information systems (ECDIS)~~

~~IMO A.818:1995, Performance standards for shipborne LORAN-C and CHAYKA receivers~~

~~IMO A.819:1995, Performance standards for shipborne global positioning system (GPS) receiver equipment~~

~~IMO A.820:1995, Performance standards for navigational radar equipment for high speed craft~~

~~IMO A.821:1995, Performance standards for gyro compasses for high speed craft~~

~~IMO A.822:1995, Performance standards for automatic steering aids (automatic pilots) for high speed craft~~

~~IMO A.823:1995, Performance standards for automatic radar plotting aids (ARPAs)~~

~~IMO A.824:1995, Performance standards for devices to indicate speed and distance~~

~~IMO MSC 64(67):1996, Performance standards for integrated bridge systems~~

~~IMO MSC 64(67):1996, Performance standards for shipborne DGPS and DGLONASS maritime radio beacon receiver equipment~~

~~IMO MSC 64(67):1996, Performance standards for radar equipment~~

~~IMO MSC 64(67):1996, Performance standards for automatic pilots~~

~~IMO MSC 64(67):1996, Amendment to resolution A.817 on ECDIS~~

~~IMO Safety of Life at Sea Convention (SOLAS) 1V-13(g):1978 (as amended), Radiotelegraph installations for lifeboats reserve source of energy~~

~~ITU-R M.219-1:1990, Alarm signal for use on the maritime radiotelephony distress frequency of 2-182 kHz~~

~~ITU-R M.489-2:1995, Technical characteristics of VHF radiotelephone equipment operating in the mobile service in channels spaced by 25 kHz~~

~~ITU-R M.491-1:1990, Translation between an identity number and identities for direct printing telegraphy in the maritime mobile service~~

~~ITU-R M.492-5:1995, Operational procedures for the use of direct printing telegraph equipment in the maritime mobile service~~

~~ITU-R M.493-8:1997, Digital selective calling system for use in the maritime mobile service~~

~~ITU-R M.540-2:1990, Operational and technical characteristics for an automated direct printing telegraph system for promulgation of navigational and meteorological warnings and urgent information to ships~~

~~ITU-R M.541-7:1997, Operational procedures for the use of digital selective calling (DSC) equipment in the maritime mobile service~~

~~ITU-R M.625-2:1995, Direct printing telegraph equipment employing automatic identification in the maritime mobile service~~

~~ITU-R M.628-3:1994, Technical characteristics for search and rescue radar transponders~~

~~ITU-R M.632-3:1997, Transmission characteristics of a satellite emergency position indicating radiobeacon (satellite EPIRB) system operating through geostationary satellites in the 1,6 GHz band~~

~~ITU-R M.633-1:1992, Transmission characteristics of a satellite emergency position indicating radiobeacon (satellite EPIRB) system operating through a low polar orbiting satellite system in the 406 MHz band~~

~~ITU-R M.688:1990, Technical characteristics for a high frequency direct printing telegraph system for promulgation of high seas and NAVTEX type maritime safety information~~

~~ITU-R M.689-2:1994, Operational procedures for an international maritime VHF radiotelephone system with automatic facilities based on DSC signalling format~~

~~ITU-R M.693:1990, Technical characteristics of VHF emergency position indicating radio beacons using digital selective calling (DSC VHF EPIRB)~~

~~ITU-R M.823:1996, Technical characteristics of differential transmissions for global navigation satellite systems (GNSS) from maritime radio beacons in the frequency band 283,5–315 kHz in Region 1 and 285–325 kHz in Regions 2 and 3~~

~~ITU Radio regulations Appendix 19:1995, Technical characteristics for transmitters and receivers used in the maritime mobile service in the band 156–174 MHz~~

~~ITU-T T.50:1992, International Reference Alphabet (IRA) (Formerly International Alphabet No. 5 or IA5) – Information technology 7 bit coded character set for information interchange~~

~~INMARSAT:1993, INMARSAT-C System definition manual (SDM), Volume 3: Ship earth station and an EGC receiver technical requirements~~

~~INMARSAT:1992, INMARSAT-E System definition manual (SDM)~~

~~COSPAS-SARSAT:1995, C/S T.001: Specification for COSPAS-SARSAT 406 MHz distress beacons~~

~~ANSI X 3.15:1976, American National Standards Institute — Character structure and character parity sense for serial-by-bit communication~~

~~ANSI X 3.16:1976, American National Standards Institute — Bit sequencing of the ANS code of information interchange in serial-by-bit data transmission~~

~~ANSI X 3.4:1977, American National Standards Institute — Code for information interchange~~

~~NOTE — All ITU R/T references developed before 1993 were formerly CCIR/CCITT Recommendations.~~

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

Annex B 11 (informative)

Glossary

NOTE The definitions which follow are included for additional understanding of this standard, but may not command universal acceptance.

address field: For sentences in this standard, fixed length field following the beginning sentence delimiter "\$" (HEX 24); for approved sentences, composed of a two-character talker identifier and a three-character sentence formatter; for proprietary sentences, composed of the character "P" (HEX 50) followed by a three-character manufacturer identification code.

approved sentence: Sentence which is listed in this standard and annexes.

ASCII: American standard code for information interchange. A seven-bit wide serial code describing numbers, upper and lower case alphabetical characters, special and non-printing characters. See American National Standards Institute (ANSI) — ANSI X 3.15, ANSI X 3.16 and ANSI X 3.4.

checksum: For this standard, a validity check performed on the data contained in the sentences, calculated by the talker, appended to the message, then re-calculated by the listener for comparison to determine if the message was received correctly.

communication protocol: Method established for message transfer between a talker and a listener which includes the message format and the sequence in which the messages are to be transferred. Also includes the signalling requirements such as baud rate, stop bits, parity, and bits per character.

data field: In a sentence, field which contains a data value.

delimiter: In this standard, character or characters used to separate fields or sentences. The following delimiters are used in this standard:

Field delimiters:

ASCII "\$" (HEX 24) for address field

ASCII ", " (HEX 2C) for data fields

ASCII "*" (HEX 2A) for checksum field

Sentence delimiters

carriage return <CR> and line feed <LF> (HEX 0D0A)

NOTE <CR><LF> is not required preceding the first sentence transmitted.

field: In this standard, character or string of characters immediately preceded by a field delimiter (see delimiter).

fixed field: In this standard, field in which the number of characters is fixed. For data fields, such fields are shown in the sentence definitions with no decimal point. Other fields which fall into this category are the address field and the checksum field.

listener: In this standard, recipient of messages across an interconnecting link.

manufacturer identification code: In this standard, three-character manufacturer identifier, usually an acronym derived from the company name, for use by a manufacturer as part of the address field in formulation of proprietary sentences.

null field: Indicates that data is not available for the field. Indicated by two ASCII commas, i.e. ",," (HEX 2C2C), or, for the last data field in a sentence, one comma followed by the checksum delimiter "*" (HEX 2A).

NOTE The ASCII null character (HEX 00) is not to be used for null fields.

one-way communication protocol: Protocol established between a talker and a listener in which only the talker may send messages (compare to two-way communication protocol).

proprietary sentence: Sentence to be sent across the interconnecting link which is not included in the list of approved sentences of this standard. All proprietary sentences sent over the interconnecting link contain a unique talker identifier which begins with a "P" (HEX 50) followed by a three-character manufacturer identification code.

semi-fixed field: Data fields having a base other than 10, but use base 10 to express precision of the final term (such as minutes expressed as units with a decimal trailer instead of seconds in a base 60 field, or seconds expressed with a decimal trailer).

sentence formatter: In this standard, three-character sentence identifier which follows the talker identifier and is included as part of the address field. The sentence formatters are an integral part of the sentence definitions provided by this standard and annexes.

talker: Originator of messages across a link.

talker identifier: First two characters following the "\$" (HEX 24) in a sentence (address characters 1 and 2); selected from table 4.

two-way communication protocol: Protocol established between a talker and a listener in which the listener may also issue requests to the talker when required (compare to one-way communication protocol).

UART: Universal asynchronous receiver/transmitter which produces an electrical signal and timing for transmission of data over a communications path, and circuitry for detection and capture of such data transmitted from another UART.

variable field: Data field which may or may not contain a decimal point and which may vary in precision following the decimal point depending on the requirements and the accuracy of the measuring device (talker).

Bibliography 12

TIA-485, *Electrical characteristics of generators and receivers for use in balanced digital multipoint systems*

National marine electronics association (USA), *NMEA 0183-HS, 38.4 K Baud Serial Data Standard For Interfacing Marine Electronic Devices*

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

List of comments

- 1 This annex is removed because maintaining of the content would require publishing new editions of this standard whenever the underlaying information is changing
 - 2 Based on current IEC rules these have been moved to Bibliography
 - 3 Added abbreviations
 - 4 More appropriate name of document from the manufacturer
 - 5 Data transmission rate is now configurable. The default remains as 38 400 (bits/s) but higher rates may be provided
 - 6 Traditional IEC 61162-2 hardware remains one alternative. The other alternative is based on traditional IEC 61162-2. This change provides flexibility for the manufacturer to use common hardware when equipment specifications request configuration selection between IEC 61162-1 and IEC 61162-2.
 - 7 Not needed
 - 8 Clarification
 - 9 This duplicate of IEC 61162-1 is replaced by a reference to IEC 61162-1
 - 10 This specific reference to IEC 61162-1 is replaced by a general reference to IEC 61162-1
 - 11 Removed as not necessary
 - 12 Based on current IEC rules these have been moved from Clause 2
-

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Maritime navigation and radiocommunication equipment and systems – Digital interfaces –

Part 2: Single talker and multiple listeners, high-speed transmission

Matériels et systèmes de navigation et de radiocommunication maritimes – Interfaces numériques –

Partie 2: Emetteur unique et récepteurs multiples, transfert rapide de données

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms, definitions and abbreviated terms	5
3.1 Terms and definitions.....	6
3.2 Abbreviated terms.....	6
4 Manufacturer's documentation	6
4.1 Standard documents	6
4.2 Additional information	6
5 Hardware specification	6
5.1 General.....	6
5.2 Interconnecting wires	7
5.3 Conductor definitions	7
5.4 Electrical connection/shield requirements	7
5.5 Connector	8
5.6 Electrical signal characteristics	8
5.6.1 Signal state definitions	8
5.6.2 Talker drive circuits	8
5.6.3 Listener receive circuits	8
5.6.4 Electrical isolation	9
5.6.5 Maximum voltage on the bus	9
6 Data transmission.....	9
7 Data format protocol.....	9
8 Data content.....	9
9 Applications.....	9
10 Methods of testing and required test results	10
10.1 Test preparation.....	10
10.1.1 General	10
10.1.2 Testing under ambient conditions	10
10.2 Test sequence	10
10.3 Standard test signals	10
10.4 Test of the interface.....	10
10.4.1 Electrical test of the interface	10
10.4.2 Protocol test of input and output	10
10.4.3 Test under maximum interface workload	11
Bibliography.....	12
Figure 1 – Talker/listener connections.....	7
Figure 2 – Cables – Electrical shield requirements.....	8
Figure 3 – Data transmission format	9

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MARITIME NAVIGATION AND RADIOCOMMUNICATION
EQUIPMENT AND SYSTEMS – DIGITAL INTERFACES –****Part 2: Single talker and multiple listeners,
high-speed transmission**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61162-2 has been prepared by IEC technical committee 80: Maritime navigation and radiocommunication equipment and systems. It is an International Standard.

This second edition cancels and replaces the first edition published in 1998. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) alternative hardware is given in 5.1 which may now be as specified in this document or as specified in IEC 61162-1;
- b) the data transmission rate given in Clause 6 is now configurable. The default remains as 38 400 (bits/s) but higher rates may be provided;

- c) the description of the data format protocol has been removed as this information is given in IEC 61162-1;
- d) former Annex A and Annex B have been deleted as now of historic interest.

The text of this International Standard is based on the following documents:

Draft	Report on voting
80/1065/CDV	80/1083/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

MARITIME NAVIGATION AND RADIOCOMMUNICATION EQUIPMENT AND SYSTEMS – DIGITAL INTERFACES –

Part 2: Single talker and multiple listeners, high-speed transmission

1 Scope

This part of IEC 61162 contains the requirements for data communication between maritime electronic instruments, navigation and radiocommunication equipment when interconnected via an appropriate interface.

This document is intended to support one-way serial data transmission from a single talker to one or more listeners. This data is in printable ASCII form and can include any information as specified by approved sentences or information coded according to the rules for proprietary sentences. Typical messages can be from 11 to a maximum of 79 characters in length and generally require repetition rates up to once per 20 ms.

The electrical definitions in this document are intended to accommodate higher data rates than are specified in IEC 61162-1. Since there is no provision for guaranteed delivery of messages and only limited error-checking capability, it is important this document is used with caution in all safety applications.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60945, *Maritime navigation and radiocommunication equipment and systems – General requirements – Methods of testing and required test results*

IEC 61162-1, *Maritime navigation and radiocommunication equipment and systems – Digital interfaces – Part 1. Single talker and multiple listeners*

ITU-T Recommendation X.27/V.11, *Electrical characteristics for balanced double-current interchange circuits operating at data signalling rates up to 10 Mbits/s*

3 Terms, definitions and abbreviated terms

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1 Terms and definitions

3.1.1

talker

device which sends data to other devices

Note 1 to entry: The type of talker is identified by a two-character mnemonic as listed in IEC 61162-1.

3.1.2

listener

device which receives data from another device

3.1.3

latency

time interval between an event and its resulting information, including time for processing, transmission and/or reception

3.2 Abbreviated terms

EMC electromagnetic compatibility

EUT equipment under test

4 Manufacturer's documentation

4.1 Standard documents

Installation manuals provided for equipment that is intended to meet the requirements of this document shall contain as a minimum the following information:

- a) identification of the A, B and common (C) signal lines (see Figure 1);
- b) the output drive capability as a talker;
- c) a list of approved sentences, noting unused fields, proprietary sentences transmitted as a talker, data latency and transmission interval for each sentence;
- d) the load requirements as a listener;
- e) a list of sentences and associated data fields that are required by, or are acceptable to, a listener;
- f) the current software and hardware revision, if this is relevant to the interface;
- g) an electrical description or schematic of the listener/talker input/output circuits citing actual components and devices used, including connector type and part number;
- h) the version number and date of update of the standard for which compliance is sought;
- i) list of supported baud rates (bits/s) including any limitations per each baud rate supported.

4.2 Additional information

As latency, filtering, error handling and data transmission interval can have a serious influence on the performance of a system, the manufacturer shall consider these aspects. Documentation should include such data where applicable.

5 Hardware specification

5.1 General

One talker and multiple listeners may be connected in parallel over interconnecting wires. Because of EMC requirements, shielded cables are recommended. The number of listeners depends on the output capability, the input drive requirements of the connected devices, and on the use of termination resistors.

Two alternatives apply for the hardware:

- 1) method based on 5.2 to 5.6;
- 2) method based on IEC 61162-1.

5.2 Interconnecting wires

Interconnection between devices may be by means of a shielded two-conductor twisted-pair wire (A, B) plus any means to secure common signal ground potential (C) for transmitting and receiving devices. For this purpose, a third wire additional to the twisted pair or the inner shield of double-shielded cable with insulated shields may be used.

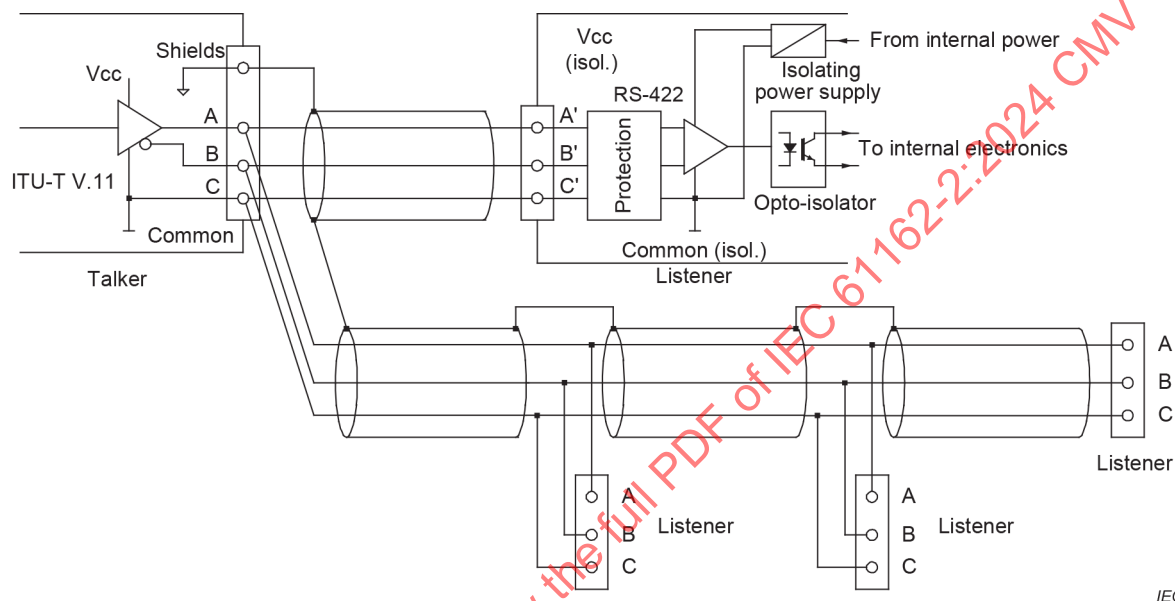


Figure 1 – Talker/listener connections

5.3 Conductor definitions

The conductors referred to in this document are the signal lines A, B, C (common) and shield.

5.4 Electrical connection/shield requirements

All signal and common line connections A, B and C are connected in parallel.

With single-shielded cables and a separate wire as common line C (signal ground), the shield shall be connected to the talker chassis and shall not be connected to any listener. However, the shield shall be continuous (unbroken) between all listeners – see Figure 1 and Figure 2 a).

With double-shielded cables and the inner shield used as common line C (signal ground), the outer shield shall be connected to the talker chassis and shall not be connected to any listener. However, the outer shield shall be continuous (unbroken) between all listeners – see Figure 1 and Figure 2 b).

With double-shielded cables and a separate wire as common line C (signal ground), the inner shield shall be connected to the talker chassis and shall not be connected to any listener. However, the inner shield shall be continuous (unbroken) between all listeners. The outer shield may be connected to the chassis on either side if required – see Figure 1 and Figure 2 c).

The cabling shall be designed in a way that stubs are avoided or kept as short as possible. If long cables are necessary, termination at the end of the line according to ITU-T Recommendation X.27/V.11 shall be considered.

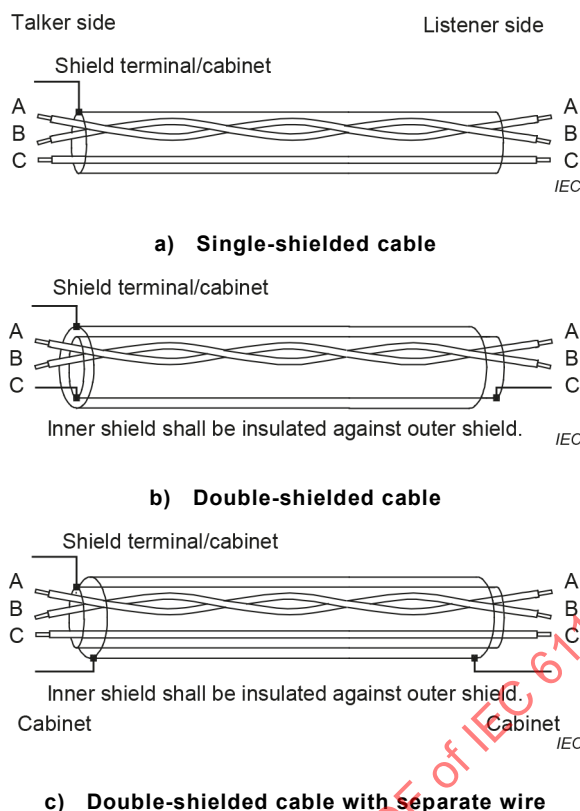


Figure 2 – Cables – Electrical shield requirements

5.5 Connector

No standard connector is specified. Wherever possible, readily available commercial connectors shall be used. Manufacturers shall provide means for user identification of the connections used.

5.6 Electrical signal characteristics

5.6.1 Signal state definitions

The idle, marking, logical 1, OFF or stop bit state is defined by a negative voltage on line A with respect to line B, as in IEC 61162-1.

The active, spacing, logical 0, ON or start bit state is defined by a positive voltage on line A with respect to line B, as in IEC 61162-1.

5.6.2 Talker drive circuits

No provision is made for more than a single talker to be connected to the bus. The drive circuit shall meet, as a minimum, the requirements of ITU-T Recommendation X.27/V.11.

Improved and compatible driver circuits (e.g. TIA-485) used in a compliant way are allowed.

5.6.3 Listener receive circuits

Multiple listeners may be connected to a single talker. The listener's receive circuit shall comply with ITU-T Recommendation X.27/V.11. Optional termination resistors for the line shall be provided. The input terminals A, B and C shall be electrically isolated from the remaining electronics of the listening device. Reference is made to 5.6.4 and a sample circuit shown in Figure 1.

5.6.4 Electrical isolation

Within a listener, there shall be no direct electrical connection between the signal lines A and B, the signal ground C or the shield to ship's mains ground or power line. This isolation shall be in accordance with IEC 60945.

5.6.5 Maximum voltage on the bus

The maximum applied voltage between signal lines A and B and between either line and ground C shall be in accordance with ITU-T Recommendation X.27/V.11.

For protection against miswiring and for unintended connection to earlier talker designs, all receive circuit devices shall be capable of withstanding 15 V between signal lines A and B and between either line and ground for an indefinite period.

6 Data transmission

Data is transmitted in serial asynchronous form in accordance with IEC 61162-1. The first bit is a start bit and is followed by data bits, least-significant-bit first as in Figure 3.

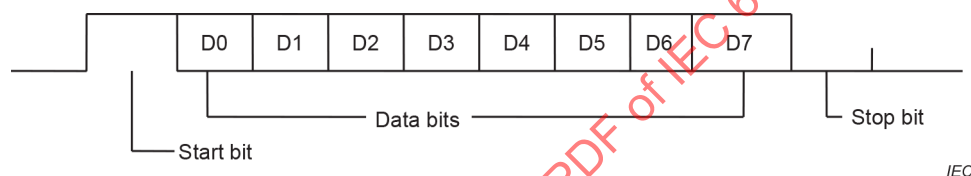


Figure 3 – Data transmission format

The following parameters are used:

- baud rate default and required is 38 400 (bits/s), higher baud rates are allowed based on equipment configuration setup;
- data bits 8 (D7 = 0), parity none;
- stop bits 1.

7 Data format protocol

Refer to IEC 61162-1.

8 Data content

Refer to IEC 61162-1.

9 Applications

Refer to IEC 61162-1.

10 Methods of testing and required test results

10.1 Test preparation

10.1.1 General

The manufacturer shall, unless otherwise agreed, set up the EUT (equipment under test) as well as all necessary test equipment and ensure that it is operational before testing commences. The manufacturer shall provide sufficient technical documentation of the EUT.

10.1.2 Testing under ambient conditions

All tests shall be carried out under the ambient conditions defined in the specific standard for the EUT. If no ambient conditions are defined, the temperature range between +10 °C and +35 °C shall be applied.

10.2 Test sequence

Where appropriate, tests against different subclauses of this document may be carried out simultaneously.

10.3 Standard test signals

For testing transmitting interfaces, those standard IEC 61162 sentences and proprietary messages shall be used which the EUT transmits during normal operation.

For testing receiving interfaces of the EUT, those IEC 61162 sentences and proprietary messages shall be applied which are received/used by the EUT during its normal operation.

10.4 Test of the interface

10.4.1 Electrical test of the interface

10.4.1.1 Normal operation range

For compatibility of the hardware, standard tests shall be used as defined in ITU-T Recommendation X.27/V.11. The electrical isolation of input circuits shall be checked by inspection of the manufacturer's documentation and tests according to the values given in IEC 60945.

10.4.1.2 Ability of input circuits to withstand maximum voltage on the bus

Between the connectors 'A', 'B' and 'C' of the interface, a voltage of 15 V shall be applied for at least 1 min. Each test shall be carried out with both polarities of the applied test voltage. After all tests, the function and the hardware of the interface shall be checked for any reading errors or damage.

10.4.2 Protocol test of input and output

The transmitting output of the EUT shall be checked for conformity with the coding methods of data as specified in this document and the proprietary sentences of the manufacturer by inspection of the manufacturer's documentation.

The receiver of the EUT shall be tested, by connecting it to a source which transmits all sentences which the EUT is able to receive. All sentences shall be detected and no error shall occur. These tests shall be executed at least using the default baud rate (38 400 bits/s). If higher baud rates are provided, then these tests shall be repeated at least for highest baud rate at longest specified distance. If available, other baud rates and distances may be selected by the inspector for sample testing.

10.4.3 Test under maximum interface workload

After activating all ports of the EUT with the maximum number of sentences to be transmitted and/or received, the data repetition rate(s) shall not decrease under the value specified by the manufacturer, and the data transmission time for one sentence shall not exceed 100 ms.

For input circuits, no data-reading errors shall be detected under maximum interface workload.

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

Bibliography

TIA-485, *Electrical characteristics of generators and receivers for use in balanced digital multipoint systems*

National marine electronics association (USA), *NMEA 0183-HS, 38.4 K Baud Serial Data Standard For Interfacing Marine Electronic Devices*

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

IECNORM.COM : Click to view the full PDF of IEC 61162-2:2024 CMV

SOMMAIRE

AVANT-PROPOS	15
1 Domaine d'application	17
2 Références normatives	17
3 Termes, définitions et termes abrégés	17
3.1 Termes et définitions	18
3.2 Termes abrégés	18
4 Documentation du fabricant	18
4.1 Documents normalisés	18
4.2 Informations supplémentaires	18
5 Spécification du matériel	19
5.1 Généralités	19
5.2 Fils d'interconnexion	19
5.3 Définitions du conducteur	19
5.4 Exigences relatives au blindage/aux connexions électriques	19
5.5 Connecteur	20
5.6 Caractéristiques des signaux électriques	20
5.6.1 Définitions des états des signaux	20
5.6.2 Circuits d'émission	21
5.6.3 Circuits de réception	21
5.6.4 Isolation électrique	21
5.6.5 Tension maximale sur le bus	21
6 Émission de données	21
7 Protocole de format des données	21
8 Contenu des données	22
9 Applications	22
10 Méthodes d'essai et résultats d'essai exigés	22
10.1 Préparation des essais	22
10.1.1 Généralités	22
10.1.2 Essais dans les conditions ambiantes	22
10.2 Séquence d'essais	22
10.3 Signaux d'essai normalisés	22
10.4 Essai de l'interface	22
10.4.1 Essai électrique de l'interface	22
10.4.2 Essai de protocole de l'entrée et de la sortie	23
10.4.3 Essai avec charge de travail maximale de l'interface	23
Bibliographie	24
Figure 1 – Connexions de l'émetteur/du récepteur	19
Figure 2 – Câbles – Exigences relatives au blindage électrique	20
Figure 3 – Format d'émission des données	21