

First edition
2016-03-15

AMENDMENT 2
2018-01

**Information technology —
Telecommunications and information
exchange between systems — Local
and metropolitan area networks —
Specific requirements —**

**Part 1Q:
Bridges and bridged networks**

**AMENDMENT 2: Application virtual
local area network (VLAN) type, length,
value (TLV)**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseaux locaux et métropolitains —
Exigences spécifiques —
Partie 1Q: Ponts et réseaux pontés*

*AMENDEMENT 2: Type, longueur, valeur (TLV) pour applications de
réseaux locaux virtuels (VLAN)*



Reference number
ISO/IEC/IEEE 8802-1Q:2016/Amd.2:2018(E)

© IEEE 2015



COPYRIGHT PROTECTED DOCUMENT

© IEEE 2015

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from ISO, IEC or IEEE at the respective address below.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Institute of Electrical and Electronics Engineers, Inc
3 Park Avenue, New York
NY 10016-5997, USA

stds.ipr@ieee.org
www.ieee.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

The main task of ISO/IEC JTC 1 is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is called to the possibility that implementation of this standard may require the use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. ISO/IEEE is not responsible for identifying essential patents or patent claims for which a license may be required, for conducting inquiries into the legal validity or scope of patents or patent claims or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance or a Patent Statement and Licensing Declaration Form, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from ISO or the IEEE Standards Association.

ISO/IEC/IEEE 8802-1Q:2016/Amd.2 was prepared by the LAN/MAN of the IEEE Computer Society (as IEEE Std 802.1Qcd-2015). It was adopted by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*, in parallel with its approval by the ISO/IEC national bodies, under the “fast-track procedure” defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE. IEEE is responsible for the maintenance of this document with participation and input from ISO/IEC national bodies.

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

IEEE Std 802.1Qcd™-2015
(Amendment to
IEEE Std 802.1Q™-2014)

**IEEE Standard for
Local and metropolitan area networks—**

Bridges and Bridged Networks

**Amendment 23: Application Virtual Local Area
Network (VLAN) Type, Length, Value (TLV)**

Sponsor

**LAN/MAN Standards Committee
of the
IEEE Computer Society**

Approved 16 February 2015

IEEE SA-Standards Board

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 802-1Q:2016/Amd 2:2018

Abstract: Enhancements to the set of TLVs used by the Data Center Bridging eXchange protocol (DCBX) for the purpose of simplifying the management of networks utilizing Data Center Bridging (DCB) features are defined in this amendment to IEEE Std 802.1Q-2014.

Keywords: Bridged Networks, Data Center Bridging (DCB), Data Center Bridging eXchange protocol (DCBX), IEEE 802[®], IEEE 802.1Q[™], IEEE 802.1Qcd[™], local area networks (LANs), MAC Bridges, metropolitan area networks, Virtual Bridged Networks (virtual LANs), VLAN Bridges

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2015 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 13 March 2015. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 978-0-7381-9565-0 STD20128
PDF: ISBN 978-0-7381-9566-7 STDPD20128

IEEE prohibits discrimination, harassment, and bullying.

For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Standards Documents.”

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE-SA Website at <http://ieeexplore.ieee.org/xpl/standards.jsp> or contact IEEE at the address listed previously. For more information about the IEEE-SA or IOWA's standards development process, visit the IEEE-SA Website at <http://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

At the time this standard was submitted to the IEEE-SA Standards Board for approval, the IEEE 802.1 Working Group had the following membership:

Glenn Parsons, *Working Group Chair*
John Messenger, *Working Group Vice Chair*
Patricia Thaler, *Chair, Data Center Bridging Task Group*
Eric Multanen, *Editor*

Ting Ao
Christian Boiger
Paul Bortorff
David Chen
Feng Chen
Weiyang Cheng
Diego Crupnicoff
Rodney Cummings
Patrick Diamond
Aboubacar Kader Diarra
Janos Farkas
Norman Finn
Geoffrey Garner
Anoop Ghanwani
Mark Gravel
Craig Gunther

Hitosh Hayakawa
Jeremy Hitt
Rahil Hussain
Anthony Jeffree
Peter Jones
Hal Keen
Marcel Kiessling
Yongbum Kim
Philippe Klein
Jouni Korhonen
Jeff Lynch
Ben Mack-Crane
Christophe Mangin
James McIntosh
Eric Multanen
Donald Pannell

Karen Randall
Dan Romascanu
Jessy V. Rouyer
Panagiotis Saltisidis
Behcet Sarikaya
Daniel Sexton
Johannes Specht
Kevin B. Stanton
Wilfried Steiner
Vahid Tabatabaee
Jeremy Touve
Karl Weber
Yuehua Wei
Brian Weis
Jordon Woods
Juan-Carlos Zuniga

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

Thomas Alexander
Nancy Bravin
William Byrd
Juan Carreon
Rodney Cummings
Yezid Donoso
Richard Edgar
Yukihiro Fujimoto
Devon Gayle
Anoop Ghanwani
Joel Goergen
Randall Groves
Michael Gundlach
Werner Hoelzl
C. Huntley
Noriyuki Ikeuchi
Atsushi Ito
Raj Jain

Anthony Jeffrey
Shinkyō Kaku
Piotr Karocki
Stuart Kerry
Morteza Khodaie
Bruce Kraemer
Yasushi Kudoh
Michael Lynch
Elvis Maculuba
Richard Mellitz
Jose Morales
Eric Multanen
Michael Newman
Nick S.A. Nikjoo
Satoshi Obara
Jean Pierre Picard
R. K. Rannow
Alon Regev

Maximilian Riegel
Robert Robinson
Dan Romascanu
Jessy V. Rouyer
Peter Saunderson
Veselin Skendzic
Kapil Sood
Thomas Starai
Eugene Stoudenmire
Walter Struppler
Patricia Thaler
Dmitri Varsanofiev
Prabodh Varshney
George Vlantis
Hung-Yu Wei
Andreas Wolf
Oreh Yuen
Dajdi Zhong

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

When the IEEE-SA Standards Board approved this standard on 16 February 2015, it had the following membership:

John Kulick, *Chair*
Jon Walter Rosdahl, *Vice Chair*
Richard H. Hulett, *Past Chair*
Konstantinos Karachalios, *Secretary*

Peter Balma
Farooq Bari
Ted Burse
Clint Chaplain
Stephen Dukes
Jean-Phillippe Faure
Gary Hoffman

Michael Janezic
Jeffrey Katz
Joseph L. Koepfinger*
David J. Law
Hung Ling
Oleg Logvinov
T. W. Olsen
Glenn Parsons

Ron Peterson
Adrian Stephens
Peter Sutherland
Yatin Trivedi
Phil Winston
Don Wright
Yu Yuan

*Member Emeritus

Also included are the following nonvoting IEEE-SA Standards Board liaisons:

Richard DeBlasio, *DOE Representative*
Michael Janezic, *NIST Representative*

Michelle Turner
IEEE-SA Content Production and Management

Kathryn Bennett
IEEE-SA Technical Program Operations

Introduction

This introduction is not part of IEEE Std 802.1Qcd™-2015, IEEE Standard for Local and metropolitan area networks—Bridges and Bridged Networks—Amendment 23: Application Virtual Local Area Network (VLAN) Type, Length, Value (TLV).

This amendment specifies the protocols, procedures, and management objects for an Application Virtual Local Area Network (VLAN) identifier (ID) Type, Length, Value (TLV) within the Data Center Bridging eXchange protocol (DCBX) defined in IEEE Std 802.1Q. This standard also specifies minor extensions and editorial corrections to the Application Priority TLV.

This standard contains state-of-the-art material. The area covered by this standard is undergoing evolution. Revisions are anticipated within the next few years to clarify existing material, to correct possible errors, and to incorporate new related material. Information on the current revision state of this and other IEEE 802 standards may be obtained from

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854-4141
USA

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd.2:2018

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

Contents

2. Normative references 2

5. Conformance 3

38. Data Center Bridging eXchange protocol (DCBX) 4

 38.1 Overview 4

Annex A (normative) PICS proforma—Bridge implementations 5

 A.35 Data Center Bridging eXchange protocol (DCBX) 5

Annex B (normative) PICS proforma—End station implementations 6

 B.14 Data Center Bridging eXchange protocol (DCBX) 6

Annex D (normative) IEEE 802.1 Organizationally Specific TLV 7

 D.1 Requirements of the IEEE 802.1 Organizationally Specific TLV sets 7

 D.2 Organizationally Specific TLV definitions 8

 D.4 PICS proforma for IEEE 802.1 Organizationally Specific TLV extensions 12

 D.5 IEEE 802.1/LLDP extension MIB 12

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

List of figures

Figure D-12—Application Priority TLV format	8
Figure D-15—Application VLAN TLV format	9

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

List of tables

Table D-1— IEEE 802.1 Organizationally Specific TLVs specified in this standard	7
Table D-8—Application Priority Table Entry format	8
Table D-9—Sel field values	9
Table D-12—Application VLAN Table Entry format	10
Table D-13—Sel field values	11
Table D-14—IEEE 802.1 extension MIB object group conformance requirements.....	12
Table D-15—IEEE 802.1/LLDP extension MIB object cross reference.....	12

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

IEEE Standard for
Local and metropolitan area networks—

Bridges and Bridged Networks

Amendment 23: Application Virtual Local Area Network (VLAN) Type, Length, Value (TLV)

IMPORTANT NOTICE: IEEE Standards documents are not intended to ensure safety, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.

(This amendment is based on IEEE Std 802.1Q™-2014.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.¹

The editing instructions are shown in **bold italic**. Four editing instructions are used: change, delete, insert, and replace. **Change** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strike through~~ (to remove old material) and underline (to add new material). **Delete** removes existing material. **Insert** adds new material without disturbing the existing material. Insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. **Replace** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.

¹Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

2. Normative references

Insert the following reference after IETF RFC 2205 and before IETF RFC 2578 in the list in Clause 2.

IETF RFC 2474, Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers, Nichols, K., Blake, S., Baker, F. and Black, D.

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

5. Conformance

5.4.1.7 DCBX Bridge requirements

Insert item g) into the lettered list in 5.4.1.7 as follows:

A device supporting DCBX shall

- a) Support Link Layer Discovery Protocol (LLDP) transmit and receive mode (IEEE Std 802.1AB).
- b) Support the DCBX ETS Configuration Type, Length, Value (TLV) (D.2.9).
- c) Support the ETS Recommendation TLV (D.2.10).
- d) Support the Priority-based Flow Control Configuration TLV (D.2.11).
- e) Support the Application Priority TLV (D.2.12).
- f) Support the asymmetric and symmetric DCBX state machines (38.4).
- g) Support the Application VLAN TLV (D.2.15).

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

38. Data Center Bridging eXchange protocol (DCBX)

Change items e) and f) and insert a new item g), as follows:

38.1 Overview

This clause details DCBX, which is used by DCB devices to exchange configuration information with directly connected peers. The protocol may also be used for misconfiguration detection and for configuration of the peer.

This standard describes the base protocol, which comprises state machines and TLVs for capability exchange. For each feature that is supported by DCBX, the attributes that are to be exchanged specify

- a) The attributes to be exchanged;
- b) How the attributes are used for detecting misconfiguration; and
- c) What action needs to be taken when a misconfiguration is detected.

The information listed above is specified for the following:

- d) ETS;
- e) PFC; ~~and~~
- f) Application Priority Configuration TLV; ~~and~~
- g) Application VLAN TLV.

Annex A

(normative)

PICS proforma—Bridge implementations²**A.35 Data Center Bridging eXchange protocol (DCBX)***Insert the following entry for the Application VLAN TLV at the end of the table in A.35.*

Item	Feature	Status	References	Support
DCBX-8	Support the Application VLAN TLV	DCBX:M	D.2.15	Yes []

²Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Annex B

(normative)

PICS proforma—End station implementations³**B.14 Data Center Bridging eXchange protocol (DCBX)***Insert the following entry for the Application VLAN TLV at the end of the table in B.14.*

Item	Feature	Status	References	Support
DCBX-8	Support the Application VLAN TLV	DCBX:M	D.2.15	Yes []

³Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Annex D

(normative)

IEEE 802.1 Organizationally Specific TLVs

D.1 Requirements of the IEEE 802.1 Organizationally Specific TLV sets

The IEEE 802.1 Organizationally Specific TLVs may be supported in conjunction with any of the destination MAC addresses identified in 7.1 of IEEE Std 802.1AB-2009.

If any IEEE 802.1 Organizationally Specific TLV set is supported, all IEEE 802.1 Organizationally Specific TLVs that are identified as members of that TLV set shall be supported. All IEEE 802.1 Organizationally Specific TLVs shall conform to the LLDPDU bit and octet ordering conventions of 8.1 of IEEE Std 802.1AB-2009.

The currently defined IEEE 802.1 Organizationally Specific TLVs specified in this standard are listed in Table D-1. Other standards can also define IEEE 802.1 Organizationally Specific TLVs. The “TLV set name” column identifies the TLV set to which each TLV belongs. Any additions or changes to these TLVs will be included in this annex.

Insert the following entry for the Application VLAN TLV at the end of Table D-1.

Table D-1— IEEE 802.1 Organizationally Specific TLVs specified in this standard

IEEE 802.1 subtype	TLV name	TLV set name	TLV reference	Feature clause reference
10	Application VLAN TLV	dcbxSet	D.2.15	Clause 38

D.2 Organizationally Specific TLV definitions

Change D.2.12 as follows:

D.2.12 Application Priority TLV

The TLV illustrated in Figure D-12 is encoded into each IEEE Std 802.1AB-2009 LLDP message and may be transmitted by a system in order to indicate the application priority table. This TLV is informational and used to indicate to a peer station the local configuration.

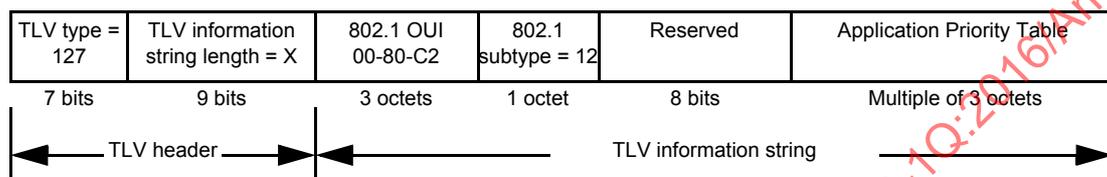


Figure D-12—Application Priority TLV format

D.2.12.1 TLV type

A 7-bit integer value occupying the most-significant bits of the first octet of the TLV. Always contains the value 127.

D.2.12.2 TLV information string length

A 9-bit unsigned integer, occupying the LSB of the first octet of the TLV (the MSB of the TLV information string length) and the entire second octet of the TLV, containing the total number of octets in the TLV information string of the Application Priority TLV. This does not count the TLV type and TLV information string length fields. The length for the Application Priority TLV is variable depending on the number of Application Priorities specified. The length shall be 5 plus a multiple of 3 octets.

D.2.12.3 Application Priority Table

Table D-8 shows the layout of a 3 octet entry in the Application Priority Table.

Table D-8—Application Priority Table Entry format

Octets:	1			2			3			
	Priority	Reserved	Sel	Protocol ID						
Bits:	8	6	5	4	3	1	8	1	8	1

The priority field is a 3-bit unsigned integer indicating the priority for which the Protocol ID is being used.

The meaning of the Protocol ID field is determined by the Sel field. Allowed values for the Sel field are shown in Table D-9.

Table D-9—Sel field values

Sel Value	Protocol ID value
0	Reserved
1	0: Default <u>application</u> priority. For use when <u>application</u> priority is not otherwise specified. 1–1535: Reserved 1536–65535: An EtherType.
2	Well Known Port number over TCP, or Steam Control Transmission Protocol (SCTP).
3	Well Known Port number over UDP, or Datagram Congestion Control Protocol (DCCP).
4	Well Known Port number over TCP, SCTP, UDP, or DCCP.
5	<u>Differentiated Services Code Point (DSCP) value. The 6-bit DSCP value is stored in bits 1–6 of the low order octet of the Protocol ID field (octet 3 of the Application Priority Table Entry). Bits 7 and 8 and the high order octet of the Protocol ID field are set to zero. (See IETF RFC 2474 for the definition of the DSCP value.)</u>
56–7	Reserved

NOTE—The port numbers shown are for identification (i.e., as assigned by IANA) instead of the actual port numbers being used in a particular deployment.

Insert a new subclause D.2.15 after D.2.14. Renumber subsequent tables and figures appropriately.

D.2.15 Application VLAN TLV

The TLV illustrated in Figure D-15 is encoded into each IEEE Std 802.1AB-2009 LLDP message and may be transmitted by a system in order to indicate the application VLAN table. This TLV is informational and used to indicate to a peer station the local configuration.

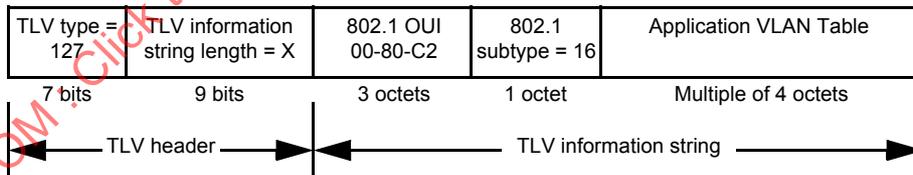


Figure D-15—Application VLAN TLV format

D.2.15.1 TLV type

A 7-bit integer value occupying the most significant bits of the first octet of the TLV. Always contains the value 127.

D.2.15.2 TLV information string length

A 9-bit unsigned integer, occupying the LSB of the first octet of the TLV (the MSB of the TLV information string length) and the entire second octet of the TLV, containing the total number of octets in the TLV information string of the Application VLAN TLV. This does not count the TLV type and TLV information string length fields. The length for the Application VLAN TLV is variable depending on the number of Application VLANs specified. The length shall be 4 plus a multiple of 4 octets.

D.2.15.3 Application VLAN Table

Table D-12 shows the layout of a 4 octet entry in the Application VLAN Table.

Table D-12—Application VLAN Table Entry format

Octets:	1		2				3		4		
Field:	VID		Reserved		Sel		Protocol ID				
Bits:	8	1	8	5	4	3	1	8	1	8	1

The VID field is a 12-bit unsigned integer indicating the VID of the VLAN for which the Protocol ID is being used.

The meaning of the Protocol ID field is determined by the Sel field. Allowed values for the Sel field are shown in Table D-13.

The Application VLAN TLV may be exchanged between EVB station ERs (5.24.1) and EVB Bridges (5.23) with LLDP using the Nearest Customer Bridge address. This allows ERs sharing a LAN using S-channels (40.2) to use different VLANs for the same application.

NOTE 1—The Application VLAN TLV allows multiple VLANs to be associated with an application on a port. Issues involved with using multiple VLANs for an application on a port, such as resolving which IP subnetwork corresponds to which VLAN, are beyond the scope of this standard.

NOTE 2—Selection of different IEEE 802.1 paths may use different VLANs, which could be associated with different quality of service levels. This TLV may not apply to deployment cases where the VID is implied by other attributes of the frame, for example, by the IP subnet of the source IP address.

Table D-13—Sel field values

Sel Value	Protocol ID value
0	Reserved
1	0: PVID. For use when an application VLAN is not otherwise specified. 1–1535: Reserved 1536–65535: An EtherType.
2	Well Known Port number over TCP, or SCTP.
3	Well Known Port number over UDP, or DCCP.
4	Well Known Port number over TCP, SCTP, UDP, or DCCP.
5	Differentiated Services Code Point (DSCP) value. The 6-bit DSCP value is stored in bits 1–6 of the low order octet of the Protocol ID field (octet 4 of the Application VLAN Table Entry). Bits 7 and 8 and the high order octet of the Protocol ID field are set to zero. (See IETF RFC 2474 for the definition of the DSCP value.)
6–7	Reserved

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

D.4 PICS proforma for IEEE 802.1 Organizationally Specific TLV extensions

D.4.3 Major capabilities and options

Change the *dcbx*tlv entry in the table in D.4.3 as follows:

Item	Feature	Status	References	Support
dcbxtlv	Is each TLV in the IEEE 802.1 DCBX TLV set implemented?			
	ETS Configuration TLV	dcbxSet:M	D.2.9	Yes <input type="checkbox"/>
	ETS Recommendation TLV	dcbxSet:M	D.2.10	Yes <input type="checkbox"/>
	Priority-based Flow Control Configuration TLV	dcbxSet:M	D.2.11	Yes <input type="checkbox"/>
	Application Priority TLV	dcbxSet:M	D.2.12	Yes <input type="checkbox"/>
	Application VLAN TLV	dcbxSet:M	D.2.15	Yes <input type="checkbox"/>

D.5 IEEE 802.1/LLDP extension MIB

D.5.2 Structure of the IEEE 802.1/LLDP extension MIB

Insert the following entry at the end of Table D-14 (renumbered from Table D-12) for the MIB group *lldpXdot1dcbxApplicationVlanGroup*.

Table D-14—IEEE 802.1 extension MIB object group conformance requirements

MIB group	Rx mode	Tx mode	Tx/Rx mode
<i>lldpXdot1dcbxApplicationVlanGroup</i>	DCBX:M	DCBX:M	DCBX:M

Change Table D-15 (renumbered from Table D-13) by adding the following entries for the Application VLAN TLV MIB objects at the end of each *dcbx* extension group section as shown. (Only the *dcbx* extension group sections of the table are shown here.)

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference

MIB table	MIB object	LLDP reference
<i>lldpXdot1dcbxConfig</i> extension group ^a		
	<i>lldpXdot1dcbxConfigETSConfigurationEntry</i>	
	<i>lldpXdot1dcbxConfigETSConfigurationTxEnable</i>	D.2.9
	<i>lldpXdot1dcbxConfigETSRecommendationTable</i>	
	<i>lldpXdot1dcbxConfigETSRecommendationTxEnable</i>	D.2.10
	<i>lldpXdot1dcbxConfigPFCTable</i>	
	<i>lldpXdot1dcbxConfigPFCTxEnable</i>	D.2.11
	<i>lldpXdot1dcbxConfigApplicationPriorityTable</i>	

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference (continued)

MIB table	MIB object	LLDP reference
	lldpXdot1dcbxConfigApplicationPriorityTxEnable	
lldpXdot1dcbxConfigApplicationVlanTable		
	lldpXdot1dcbxConfigApplicationVlanTxEnable	D.2.15
<i>lldpXdot1dcbxLocalData extension group^a</i>		
lldpXdot1dcbxLocETSTBasicConfigurationTable		
	lldpXdot1dcbxLocETSTConCreditBasedShaperSupport	D.2.9.4
	lldpXdot1dcbxLocETSTConMaxTC	D.2.9.5
	lldpXdot1dcbxLocETSTConWilling	D.2.9.3
	lldpXdot1dcbxLocETSTConTrafficClassBandwidthTable	D.2.9.7
	lldpXdot1dcbxLocETSTConTrafficSelectionAlgorithmTable	D.2.9.8
lldpXdot1dcbxLocETSTConPriorityAssignmentTable		
	lldpXdot1dcbxLocETSTConPriority	D.2.9.6
	lldpXdot1dcbxLocETSTConTrafficClass	D.2.9.6
lldpXdot1dcbxLocETSRecommendationTable		
	lldpXdot1dcbxLocETSRecoTrafficClassBandwidthTable	D.2.10.4
lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmTable		
	lldpXdot1dcbxLocETSRecoTSA Priority	D.2.10.5
	lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithm	D.2.10.5
lldpXdot1dcbxLocPFCBasicTable		
	lldpXdot1dcbxLocPFCWilling	D.2.11.3
	lldpXdot1dcbxLocPFCMBC	D.2.11.4
	lldpXdot1dcbxLocPFC Cap	D.2.11.5
lldpXdot1dcbxLocPFCEnableTable		
	lldpXdot1dcbxLocPFCEnablePriority	D.2.11.6
	lldpXdot1dcbxLocPFCEnableEnabled	D.2.11.6
lldpXdot1dcbxLocApplicationPriorityAppTable		
	lldpXdot1dcbxLocApplicationPriorityAESelector	D.2.12.3
	lldpXdot1dcbxLocApplicationPriorityAEProtocol	D.2.12.3
	lldpXdot1dcbxLocApplicationPriorityAEPriority	D.2.12.3
<u>lldpXdot1dcbxLocApplicationVlanAppTable</u>		
	<u>lldpXdot1dcbxLocApplicationVlanAESelector</u>	<u>D.2.15.3</u>
	<u>lldpXdot1dcbxLocApplicationVlanAEProtocol</u>	<u>D.2.15.3</u>

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference (continued)

MIB table	MIB object	LLDP reference
	<u>lldpXdot1dcbxLocApplicationVlanAEVlanId</u>	<u>D.2.15.3</u>
<i>lldpXdot1dcbxRemoteData extension group^a</i>		
	lldpXdot1dcbxRemETSBasicConfigurationTable	
	lldpXdot1dcbxRemETSConCreditBasedShaperSupport	D.2.9.4
	lldpXdot1dcbxRemETSConMaxTC	D.2.9.5
	lldpXdot1dcbxRemETSConWilling	D.2.9.3
	lldpXdot1dcbxRemETSConTrafficClassBandwidthTable	D.2.9.7
	lldpXdot1dcbxRemETSConTrafficSelectionAlgorithm-Table	D.2.9.8
	lldpXdot1dcbxRemETSConPriorityAssignmentTable	
	lldpXdot1dcbxRemETSConPriority	D.2.9.6
	lldpXdot1dcbxRemETSConTrafficClass	D.2.9.6
	lldpXdot1dcbxRemETSRecommendationTable	
	lldpXdot1dcbxRemETSRecoTrafficClassBandwidthTable	D.2.10.4
	lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmTable	
	lldpXdot1dcbxRemETSRecoTSPriority	D.2.10.5
	lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithm	D.2.10.5
	lldpXdot1dcbxRemPFBasicTable	
	lldpXdot1dcbxRemPFCWilling	D.2.11.3
	lldpXdot1dcbxRemPFCMBC	D.2.11.4
	lldpXdot1dcbxRemPFCap	D.2.11.5
	lldpXdot1dcbxRemPFCEnableTable	
	lldpXdot1dcbxRemPFCEnablePriority	D.2.11.6
	lldpXdot1dcbxRemPFCEnableEnabled	D.2.11.6
	lldpXdot1dcbxRemApplicationPriorityAppTable	
	lldpXdot1dcbxRemApplicationPriorityAESelector	D.2.12.3
	lldpXdot1dcbxRemApplicationPriorityAEProtocol	D.2.12.3
	lldpXdot1dcbxRemApplicationPriorityAEPriority	D.2.12.3
	<u>lldpXdot1dcbxRemApplicationVlanAppTable</u>	
	<u>lldpXdot1dcbxRemApplicationVlanAESelector</u>	<u>D.2.15.3</u>
	<u>lldpXdot1dcbxRemApplicationVlanAEProtocol</u>	<u>D.2.15.3</u>
	<u>lldpXdot1dcbxRemApplicationVlanAEVlanId</u>	<u>D.2.15.3</u>
<i>lldpXdot1dcbxAdminData extension group^a</i>		

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference (continued)

MIB table	MIB object	LLDP reference
lldpXdot1dcbxAdminETSTrafficClassBandwidthTable		
	lldpXdot1dcbxAdminETSTrafficClassBandwidthTable	D.2.9.4
	lldpXdot1dcbxAdminETSTrafficClassBandwidthTable	D.2.9.5
	lldpXdot1dcbxAdminETSTrafficClassBandwidthTable	D.2.9.3
	lldpXdot1dcbxAdminETSTrafficClassBandwidthTable	D.2.9.7
	lldpXdot1dcbxAdminETSTrafficClassBandwidthTable	D.2.9.8
lldpXdot1dcbxAdminETSPriorityAssignmentTable		
	lldpXdot1dcbxAdminETSPriorityAssignmentTable	D.2.9.6
	lldpXdot1dcbxAdminETSPriorityAssignmentTable	D.2.9.6
lldpXdot1dcbxAdminETSRecommendationTable		
	lldpXdot1dcbxAdminETSRecommendationTable	D.2.10.4
lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmTable		
	lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmTable	D.2.10.5
	lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmTable	D.2.10.5
lldpXdot1dcbxAdminPFCBasicTable		
	lldpXdot1dcbxAdminPFCBasicTable	D.2.11.3
	lldpXdot1dcbxAdminPFCBasicTable	D.2.11.4
	lldpXdot1dcbxAdminPFCBasicTable	D.2.11.5
lldpXdot1dcbxAdminPFCEnableTable		
	lldpXdot1dcbxAdminPFCEnableTable	D.2.11.6
	lldpXdot1dcbxAdminPFCEnableTable	D.2.11.6
lldpXdot1dcbxAdminApplicationPriorityAppTable		
	lldpXdot1dcbxAdminApplicationPriorityAppTable	D.2.12.3
	lldpXdot1dcbxAdminApplicationPriorityAppTable	D.2.12.3
	lldpXdot1dcbxAdminApplicationPriorityAppTable	D.2.12.3
lldpXdot1dcbxAdminApplicationVlanAppTable		
	lldpXdot1dcbxAdminApplicationVlanAppTable	D.2.15.3
	lldpXdot1dcbxAdminApplicationVlanAppTable	D.2.15.3
	lldpXdot1dcbxAdminApplicationVlanAppTable	D.2.15.3

^aThe term Extension Group is used here to be consistent with LLDP (see IEEE Std 802.1AB).

D.5.4 Security considerations for IEEE 802.1 LLDP extension MIB module

Insert the following objects into the numbered list of objects under item g):

- 22) IldpXdot1dcbxLocApplicationPriorityAppTable
- 23) IldpXdot1dcbxLocApplicationVlanAppTable
- 24) IldpXdot1dcbxAdminApplicationPriorityAppTable
- 25) IldpXdot1dcbxAdminApplicationVlanAppTable

Insert the following objects into the numbered list of objects under item h):

- 22) IldpXdot1dcbxRemApplicationPriorityAppTable
- 23) IldpXdot1dcbxRemApplicationVlanAppTable
- 24) IldpXdot1dcbxAdminApplicationPriorityAppTable
- 25) IldpXdot1dcbxAdminApplicationVlanAppTable

IECNORM.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1Q:2016/Amd 2:2018

D.5.5 IEEE 802.1 LLDP extension MIB module—version 2^{4,5}

Change the MIB by adding Application VLAN TLV entries as shown:

In the following MIB definition, should any discrepancy between the DESCRIPTION text and the corresponding definition in D.2.1 through D.5 occur, the definition in D.2.1 through D.5 shall take precedence.

```
LLDP-EXT-DOT1-V2-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY,
    OBJECT-TYPE,
    Unsigned32
        FROM SNMPv2-SMI
    TruthValue,
    TEXTUAL-CONVENTION
        FROM SNMPv2-TC
    SnmpAdminString
        FROM SNMP-FRAMEWORK-MIB
    MODULE-COMPLIANCE,
    OBJECT-GROUP
        FROM SNMPv2-CONF
    ifGeneralInformationGroup
        FROM IF-MIB
    lldpV2Extensions,
    lldpV2LocPortIfIndex,
    lldpV2RemTimeMark,
    lldpV2RemLocalIfIndex,
    lldpV2RemLocalDestMACAddress,
    lldpV2RemIndex,
    lldpV2PortConfigEntry
        FROM LLDP-V2-MIB
    VlanId
        FROM Q-BRIDGE-MIB
    LldpV2LinkAggStatusMap
        FROM LLDP-V2-TC-MIB
    IEEE8021PriorityValue
        FROM IEEE8021-TC-MIB;

lldpV2Xdot1MIB MODULE-IDENTITY
    LAST-UPDATED "201502160000Z" -- February 16, 2015
    ORGANIZATION "IEEE 802.1 Working Group"
    CONTACT-INFO
        "WG-URL: http://grouper.ieee.org/groups/802/1/index.html
        WG-EMail: STDS-802-1-L@LISTSERV.IEEE.ORG

        Contact: IEEE 802.1 Working Group Chair
        Postal: C/O IEEE 802.1 Working Group
                IEEE Standards Association
                445 Hoes Lane
                P.O. Box 1331
                Piscataway
```

⁴Copyright release for MIBs: Users of this standard may freely reproduce the MIB contained in this subclause so that it can be used for its intended purpose.

⁵An ASCII version of this MIB module can be obtained by Web browser from the IEEE 802.1 Website at <http://www.ieee802.org/1/pages/MIBS.html>.

NJ 08855-1331

USA

E-mail: STDS-802-1-L@LISTSERV.IEEE.ORG"

DESCRIPTION

"The LLDP Management Information Base extension module for IEEE 802.1 organizationally defined discovery information.

In order to ensure the uniqueness of the LLDP-V2-MIB, lldpV2Xdot1MIB is branched from lldpV2Extensions using an Organizationally Unique Identifier (OUI) value as the node. An OUI is a 24 bit globally unique number assigned by the IEEE Registration Authority - see:

<http://standards.ieee.org/develop/regauth/oui/index.html>

Unless otherwise indicated, the references in this MIB module are to IEEE Std 802.1Q-2014.

Copyright (C) IEEE (2015). This version of this MIB module is published as D.5.5 of IEEE Std 802.1Q; see the standard itself for full legal notices."

REVISION "201502160000Z" -- February 16, 2015

DESCRIPTION

"Published as part of IEEE Std 802.1Qcd revision. Adds Application VLAN TLV objects to the DCBX groups of the MIB module."

REVISION "201412150000Z" -- December 15, 2014

DESCRIPTION

"Published as part of IEEE Std 802.1Q-2014 revision. Cross references updated and corrected. New tables lldpV2Xdot1RemVidUsageDigestV2Table and lldpV2Xdot1RemManVidV2Table inserted; old versions deprecated. New versions add an index for lldpV2RemIndex. "

REVISION "201103250000Z" -- March 25, 2011

DESCRIPTION

"Published as part of IEEE Std 802.1Qaz-2011. Adds the DCBX objects to the MIB module"

REVISION "201103230000Z" -- March 23, 2011

DESCRIPTION

"Published as part of IEEE Std 802.1Q-2011 revision. This revision contains changes associated with relocating the extension MIB from IEEE Std 802.1AB to IEEE Std 802.1Q, minor tweaks to the text of the DESCRIPTION statement above to fix references to IEEE Std 802.1Q, updating of references to refer to Annex D, and addition of object definitions for Congestion Notification TLVs and corresponding compliance statements."

REVISION "200906080000Z" -- June 08, 2009

DESCRIPTION

"Published as part of IEEE Std 802.1AB-2009 revision.
This revision incorporated changes to the MIB to support the use of LLDP with multiple destination MAC addresses, and to import the Link Aggregation TLV from the 802.3 extension MIB"

```
-- OUI for IEEE 802.1 is 32962 (00-80-C2)
 ::= { lldpV2Extensions 32962 }
```

```
-----
-----
--
-- Organizationaly Defined Information Extension - IEEE 802.1
-- Definitions to support the basicSet TLV set (Table D-1)
--
-----
-----
```

```
lldpV2Xdot1Objects OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 1 }
```

```
-- LLDP IEEE 802.1 extension MIB groups
```

```
lldpV2Xdot1Config OBJECT IDENTIFIER ::= { lldpV2Xdot1Objects 1 }
lldpV2Xdot1LocalData OBJECT IDENTIFIER ::= { lldpV2Xdot1Objects 2 }
lldpV2Xdot1RemoteData OBJECT IDENTIFIER ::= { lldpV2Xdot1Objects 3 }
```

```
-- IEEE 802.1 - Configuration for the basicSet TLV set
-----
-----
```

```
--
-- lldpV2Xdot1ConfigPortVlanTable : configure the transmission of the
-- Port VLAN-ID TLVs on set of ports.
--
```

```
lldpV2Xdot1ConfigPortVlanTable OBJECT-TYPE
```

```
SYNTAX SEQUENCE OF LldpV2Xdot1ConfigPortVlanEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

"A table that controls selection of LLDP Port VLAN-ID TLVs to be transmitted on individual ports."

```
::= { lldpV2Xdot1Config 1 }
```

```
lldpV2Xdot1ConfigPortVlanEntry OBJECT-TYPE
```

```
SYNTAX LldpV2Xdot1ConfigPortVlanEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

"LLDP configuration information that controls the transmission of IEEE 802.1 organizationally defined Port VLAN-ID TLV on LLDP transmission capable ports.

This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated lldpV2PortConfigEntry entry.

Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry) after a re-initialization of the management system."

```
AUGMENTS { lldpV2PortConfigEntry }
 ::= { lldpV2Xdot1ConfigPortVlanTable 1 }
```

```
LldpV2Xdot1ConfigPortVlanEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigPortVlanTxEnable TruthValue
}
```

```
lldpV2Xdot1ConfigPortVlanTxEnable OBJECT-TYPE
```

```
SYNTAX      TruthValue
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
```

"The lldpV2Xdot1ConfigPortVlanTxEnable, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined port VLAN TLV transmission is allowed on a given LLDP transmission capable port.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

```
REFERENCE
```

"9.1.2.1 of IEEE Std 802.1AB"

```
DEFVAL { false }
```

```
::= { lldpV2Xdot1ConfigPortVlanEntry 1 }
```

```
--
```

```
-- lldpV2Xdot1ConfigVlanNameTable : configure the transmission of the
--                                VLAN name instances on set of ports.
--
```

```
lldpV2Xdot1ConfigVlanNameTable OBJECT-TYPE
```

```
SYNTAX      SEQUENCE OF LldpV2Xdot1ConfigVlanNameEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
```

"The table that controls selection of LLDP VLAN name TLV instances to be transmitted on individual ports."

```
::= { lldpV2Xdot1Config 2 }
```

```
lldpV2Xdot1ConfigVlanNameEntry OBJECT-TYPE
```

```
SYNTAX      LldpV2Xdot1ConfigVlanNameEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
```

"LLDP configuration information that specifies the set of ports (represented as a PortList) on which the Local System VLAN name instance is transmitted.

This configuration object augments the lldpV2LocVlanEntry, therefore it is only present along with the VLAN Name instance contained in the associated lldpV2LocVlanNameEntry entry.

Each active lldpV2Xdot1ConfigVlanNameEntry is restored

```

        from non-volatile storage (along with the corresponding
        lldpV2Xdot1LocVlanNameEntry) after a re-initialization of
        the management system."
    AUGMENTS { lldpV2Xdot1LocVlanNameEntry }
    ::= { lldpV2Xdot1ConfigVlanNameTable 1 }

lldpV2Xdot1ConfigVlanNameEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigVlanNameTxEnable TruthValue
}

lldpV2Xdot1ConfigVlanNameTxEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The boolean value that indicates whether the corresponding
        Local System VLAN name instance is transmitted on the
        port defined by the given lldpV2Xdot1LocVlanNameEntry.

        The value of this object is restored from non-volatile
        storage after a re-initialization of the management
        system."
    REFERENCE
        "9.1.2.1 of IEEE Std 802.1AB"
    DEFVAL     { false }
    ::= { lldpV2Xdot1ConfigVlanNameEntry 1 }

--
-- lldpV2Xdot1ConfigProtoVlanTable : configure the transmission of the
--                                 protocol VLAN instances on set
--                                 of ports.
--

lldpV2Xdot1ConfigProtoVlanTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1ConfigProtoVlanEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The table that controls selection of LLDP Port And
        Protocol VLAN ID TLV instances to be transmitted on
        individual ports."
    ::= { lldpV2Xdot1Config 3 }

lldpV2Xdot1ConfigProtoVlanEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1ConfigProtoVlanEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "LLDP configuration information that specifies the set of
        ports (represented as a PortList) on which the Local System
        Protocol VLAN instance is transmitted.

        This configuration object augments the
        lldpV2Xdot1LocVlanEntry, therefore it is only present along
        with the Port and Protocol VLAN ID instance contained in
        the associated lldpV2Xdot1LocVlanEntry entry."

```

Each active lldpV2Xdot1ConfigProtoVlanEntry is restored from non-volatile storage (along with the corresponding lldpV2Xdot1LocProtoVlanEntry) after a re-initialization of the management system."

```
AUGMENTS { lldpV2Xdot1LocProtoVlanEntry }
::= { lldpV2Xdot1ConfigProtoVlanTable 1 }
```

```
lldpV2Xdot1ConfigProtoVlanEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigProtoVlanTxEnable TruthValue
}
```

```
lldpV2Xdot1ConfigProtoVlanTxEnable OBJECT-TYPE
```

```
SYNTAX      TruthValue
MAX-ACCESS  read-write
STATUS      current
```

```
DESCRIPTION
```

"The boolean value that indicates whether the corresponding Local System Port and Protocol VLAN instance is transmitted on the port defined by the given lldpV2Xdot1LocProtoVlanEntry.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

```
REFERENCE
```

"9.1.2.1 of IEEE Std 802.1AB"

```
DEFVAL { false }
```

```
::= { lldpV2Xdot1ConfigProtoVlanEntry 1 }
```

```
--
```

```
-- lldpV2Xdot1ConfigProtocolTable : configure the transmission of the
--                               protocol instances on set
--                               of ports.
--
```

```
lldpV2Xdot1ConfigProtocolTable OBJECT-TYPE
```

```
SYNTAX      SEQUENCE OF LldpV2Xdot1ConfigProtocolEntry
MAX-ACCESS  not-accessible
STATUS      current
```

```
DESCRIPTION
```

"The table that controls selection of LLDP Protocol TLV instances to be transmitted on individual ports."

```
::= { lldpV2Xdot1Config 4 }
```

```
lldpV2Xdot1ConfigProtocolEntry OBJECT-TYPE
```

```
SYNTAX      LldpV2Xdot1ConfigProtocolEntry
MAX-ACCESS  not-accessible
STATUS      current
```

```
DESCRIPTION
```

"LLDP configuration information that specifies the set of ports (represented as a PortList) on which the Local System Protocol instance is transmitted.

This configuration object augments the lldpV2Xdot1LocProtoEntry, therefore it is only present along with the Protocol instance contained in the

associated lldpV2Xdot1LocProtoEntry entry.

Each active lldpV2Xdot1ConfigProtocolEntry is restored from non-volatile storage (along with the corresponding lldpV2Xdot1LocProtocolEntry) after a re-initialization of the management system."

```
AUGMENTS { lldpV2Xdot1LocProtocolEntry }
::= { lldpV2Xdot1ConfigProtocolTable 1 }
```

```
LldpV2Xdot1ConfigProtocolEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigProtocolTxEnable TruthValue
}
```

```
lldpV2Xdot1ConfigProtocolTxEnable OBJECT-TYPE
```

```
SYNTAX TruthValue
```

```
MAX-ACCESS read-write
```

```
STATUS current
```

```
DESCRIPTION
```

"The boolean value that indicates whether the corresponding Local System Protocol Identity instance is transmitted on the port defined by the given lldpV2Xdot1LocProtocolEntry.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

```
REFERENCE
```

"9.1.2.1 of IEEE Std 802.1AB"

```
DEFVAL { false }
```

```
::= { lldpV2Xdot1ConfigProtocolEntry 1 }
```

```
--
```

```
-- lldpV2Xdot1ConfigVidUsageDigestTable: configure the transmission
-- of the VID Usage Digest TLVs on set of ports.
```

```
--
```

```
lldpV2Xdot1ConfigVidUsageDigestTable OBJECT-TYPE
```

```
SYNTAX SEQUENCE OF LldpV2Xdot1ConfigVidUsageDigestEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

"A table that controls selection of LLDP VID Usage Digest TLVs to be transmitted on individual ports."

```
::= { lldpV2Xdot1Config 5 }
```

```
lldpV2Xdot1ConfigVidUsageDigestEntry OBJECT-TYPE
```

```
SYNTAX LldpV2Xdot1ConfigVidUsageDigestEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

"LLDP configuration information that specifies the set of ports (represented as a PortList) on which the local system VID Usage Digest instance will be transmitted. This configuration object augments the lldpLocVidUsageDigestEntry, therefore it is only present along with the VID Usage Digest instance contained in the associated lldpV2Xdot1LocVidUsageDigestEntry entry. Each active lldpConfigVidUsageDigestEntry must be restored from non-volatile storage and re-created (along with

```

        the corresponding lldpV2Xdot1LocVidUsageDigestEntry) after
        a re-initialization of the management system."
    AUGMENTS { lldpV2Xdot1LocVidUsageDigestEntry }
 ::= { lldpV2Xdot1ConfigVidUsageDigestTable 1 }

LldpV2Xdot1ConfigVidUsageDigestEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigVidUsageDigestTxEnable TruthValue
}

lldpV2Xdot1ConfigVidUsageDigestTxEnable OBJECT-TYPE
    SYNTAX TruthValue
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "The boolean value that indicates whether the corresponding
        Local System VID Usage Digest instance will be transmitted
        on the port defined by the given
        lldpV2Xdot1LocVidUsageDigestEntry. The value of this object
        must be restored from non-volatile storage after a
        reinitialization of the management system."
    REFERENCE
        "9.1.2.1 of IEEE Std 802.1AB"
    DEFVAL { false }
 ::= { lldpV2Xdot1ConfigVidUsageDigestEntry 1 }

--
-- lldpV2Xdot1ConfigManVidTable : configure the transmission of the
-- Management VID TLVs on set of ports.
--
lldpV2Xdot1ConfigManVidTable OBJECT-TYPE
    SYNTAX SEQUENCE OF LldpV2Xdot1ConfigManVidEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "A table that controls selection of LLDP Management VID
        TLVs to be transmitted on individual ports."
 ::= { lldpV2Xdot1Config 6 }

lldpV2Xdot1ConfigManVidEntry OBJECT-TYPE
    SYNTAX LldpV2Xdot1ConfigManVidEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "LLDP configuration information that specifies the set of
        port/destination address pairs on which the Local
        System Management VID will be transmitted.
        This configuration object augments the
        lldpV2Xdot1LocManVidEntry, therefore it is
        only present along with the Management VID contained
        in the associated lldpV2Xdot1LocManVidEntry entry.
        Each active lldpV2Xdot1ConfigManVidEntry must be
        restored from non-volatile storage (along with the
        corresponding lldpV2Xdot1LocManVidEntry) after a
        re-initialization of the management system."
    AUGMENTS { lldpV2Xdot1LocManVidEntry }
 ::= { lldpV2Xdot1ConfigManVidTable 1 }

LldpV2Xdot1ConfigManVidEntry ::= SEQUENCE {

```

```

    lldpV2Xdot1ConfigManVidTxEnable TruthValue
  }

lldpV2Xdot1ConfigManVidTxEnable OBJECT-TYPE
    SYNTAX TruthValue
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "The lldpV2Xdot1ConfigManVidTxEnable, which is defined as a
        truth value and configured by the network management,
        determines whether the IEEE 802.1 organizationally
        defined Management VID TLV transmission is allowed on a given
        LLDP transmission capable port.
        The value of this object must be restored from
        non-volatile storage after a re-initialization of the
        management system."
    REFERENCE
        "9.1.2.1 of IEEE Std 802.1AB"
    DEFVAL { false }
 ::= { lldpV2Xdot1ConfigManVidEntry 1 }

-----
-- IEEE 802.1 - Local System Information
-----

--
-- lldpV2Xdot1LocTable - indexed by ifIndex
--

lldpV2Xdot1LocTable OBJECT-TYPE
    SYNTAX SEQUENCE OF LldpV2Xdot1LocEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "This table contains one row per port for IEEE 802.1
        organizationally defined LLDP extension on the local system
        known to this agent."
    ::= { lldpV2Xdot1LocalData 1 }

lldpV2Xdot1LocEntry OBJECT-TYPE
    SYNTAX LldpV2Xdot1LocEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "Information about IEEE 802.1 organizationally defined
        LLDP extension."
    INDEX { lldpV2LocPortIfIndex }
    ::= { lldpV2Xdot1LocTable 1 }

LldpV2Xdot1LocEntry ::= SEQUENCE {
    lldpV2Xdot1LocPortVlanId Unsigned32
}

lldpV2Xdot1LocPortVlanId OBJECT-TYPE
    SYNTAX Unsigned32 (0|1..4094)
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION

```

"The integer value used to identify the port's VLAN identifier associated with the local system. A value of zero shall be used if the system either does not know the PVID or does not support Port-based VLAN operation."

REFERENCE

"D.2.1.1"

::= { lldpV2Xdot1LocEntry 1 }

--

-- lldpV2Xdot1LocProtoVlanTable: Port and Protocol VLAN information

-- re-indexed by ifIndex.

--

lldpV2Xdot1LocProtoVlanTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpV2Xdot1LocProtoVlanEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table contains one or more rows per Port and Protocol VLAN information about the local system."

::= { lldpV2Xdot1LocalData 2 }

lldpV2Xdot1LocProtoVlanEntry OBJECT-TYPE

SYNTAX LldpV2Xdot1LocProtoVlanEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Port and protocol VLAN ID Information about a particular port component. There may be multiple port and protocol VLANs, identified by a particular lldpV2Xdot1LocProtoVlanId, configured on the given port."

INDEX { lldpV2LocPortIfIndex,
lldpV2Xdot1LocProtoVlanId }

::= { lldpV2Xdot1LocProtoVlanTable 1 }

LldpV2Xdot1LocProtoVlanEntry ::= SEQUENCE {

lldpV2Xdot1LocProtoVlanId Unsigned32,

lldpV2Xdot1LocProtoVlanSupported TruthValue,

lldpV2Xdot1LocProtoVlanEnabled TruthValue

}

lldpV2Xdot1LocProtoVlanId OBJECT-TYPE

SYNTAX Unsigned32 (0|1..4094)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The integer value used to identify the port and protocol VLANs associated with the given port associated with the local system. A value of zero shall be used if the system either does not know the protocol VLAN ID (PPVID) or does not support port and protocol VLAN operation."

REFERENCE

"D.2.2.2"

::= { lldpV2Xdot1LocProtoVlanEntry 1 }

lldpV2Xdot1LocProtoVlanSupported OBJECT-TYPE

```

SYNTAX      TruthValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The truth value used to indicate whether the given port
    (associated with the local system) supports port and
    protocol VLANs."
REFERENCE
    "D.2.2.1"
 ::= { lldpV2Xdot1LocProtoVlanEntry 2 }

lldpV2Xdot1LocProtoVlanEnabled OBJECT-TYPE
SYNTAX      TruthValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The truth value used to indicate whether the port and
    protocol VLANs are enabled on the given port associated
    with the local system."
REFERENCE
    "D.2.2.1"
 ::= { lldpV2Xdot1LocProtoVlanEntry 3 }

--
-- lldpV2Xdot1LocVlanNameTable : VLAN name information about the local
-- system indexed by ifIndex.
--

lldpV2Xdot1LocVlanNameTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot1LocVlanNameEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one or more rows per IEEE 802.1Q VLAN
    name information on the local system known to this agent."
 ::= { lldpV2Xdot1LocalData 3 }

lldpV2Xdot1LocVlanNameEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot1LocVlanNameEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "VLAN name Information about a particular port component.
    There may be multiple VLANs, identified by a particular
    lldpV2Xdot1LocVlanId, configured on the given port."
INDEX       { lldpV2LocPortIfIndex,
              lldpV2Xdot1LocVlanId }
 ::= { lldpV2Xdot1LocVlanNameTable 1 }

LldpV2Xdot1LocVlanNameEntry ::= SEQUENCE {
    lldpV2Xdot1LocVlanId      VlanId,
    lldpV2Xdot1LocVlanName   SnmpAdminString
}

lldpV2Xdot1LocVlanId OBJECT-TYPE
SYNTAX      VlanId
MAX-ACCESS  not-accessible

```

```

STATUS      current
DESCRIPTION
    "The integer value used to identify the IEEE 802.1Q
    VLAN IDs with which the given port is compatible."
REFERENCE
    "D.2.3.2"
 ::= { lldpV2Xdot1LocVlanNameEntry 1 }

lldpV2Xdot1LocVlanName OBJECT-TYPE
SYNTAX      SnmpAdminString (SIZE(1..32))
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The string value used to identify VLAN name identified
    by the Vlan Id associated with the given port on the
    local system.

    This object should contain the value of the
    dot1QVLANStaticName object (defined in IETF RFC 4363)
    identified with the given lldpV2Xdot1LocVlanId."
REFERENCE
    "D.2.3.4"
 ::= { lldpV2Xdot1LocVlanNameEntry 2 }

--
-- lldpV2Xdot1LocProtocolTable : Protocol Identity information
-- re-indexed by ifIndex and destination address
--

lldpV2Xdot1LocProtocolTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot1LocProtocolEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one or more rows per protocol identity
    information on the local system known to this agent."
REFERENCE
    "D.2.4"
 ::= { lldpV2Xdot1LocalData 4 }

lldpV2Xdot1LocProtocolEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot1LocProtocolEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Information about particular protocols that are accessible
    through the given port component.

    There may be multiple protocols, identified by particular
    lldpV2Xdot1ProtocolIndex, lldpV2LocPortIfIndex"
REFERENCE
    "D.2.4"
INDEX      { lldpV2LocPortIfIndex,
            lldpV2Xdot1LocProtocolIndex }
 ::= { lldpV2Xdot1LocProtocolTable 1 }

LldpV2Xdot1LocProtocolEntry ::= SEQUENCE {

```

```

    lldpV2Xdot1LocProtocolIndex Unsigned32,
    lldpV2Xdot1LocProtocolId    OCTET STRING
}

lldpV2Xdot1LocProtocolIndex OBJECT-TYPE
    SYNTAX      Unsigned32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object represents an arbitrary local integer value
        used by this agent to identify a particular protocol
        identity."
    ::= { lldpV2Xdot1LocProtocolEntry 1 }

lldpV2Xdot1LocProtocolId OBJECT-TYPE
    SYNTAX      OCTET STRING (SIZE (1..255))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The octet string value used to identify the protocols
        associated with the given port of the local system."
    REFERENCE
        "D.2.4.3"
    ::= { lldpV2Xdot1LocProtocolEntry 2 }

--
-- lldpV2Xdot1LocVidUsageDigestTable: Table of hash values of
-- system VID Usage Table transmitted
-- via VID Usage Digest TLV.
--

lldpV2Xdot1LocVidUsageDigestTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1LocVidUsageDigestEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one row per ifIndex/
        destination MAC address pair for usage digest
        information on the local system known to this agent."
    REFERENCE
        "D.2.5"
    ::= { lldpV2Xdot1LocalData 5 }

lldpV2Xdot1LocVidUsageDigestEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1LocVidUsageDigestEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Usage digest information to be transmitted
        through the given port."
    REFERENCE
        "D.2.5"
    INDEX      { lldpV2LocPortIfIndex }
    ::= { lldpV2Xdot1LocVidUsageDigestTable 1 }

LldpV2Xdot1LocVidUsageDigestEntry ::= SEQUENCE {
    lldpV2Xdot1LocVidUsageDigest Unsigned32

```

}

lldpV2Xdot1LocVidUsageDigest OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The integer value obtained by applying the CRC32 function to the 128-octet VID Usage Table. A bit of the VID Usage Table contains the value PBB-TE-USAGE (binary 1) if the corresponding element of the MST Configuration Table (IEEE Std 802.1Q 8.9.1) contains the value PBB-TE MSTID (hex FFE) and otherwise contains the value NON-PBB-TE-USAGE (binary 0)."

REFERENCE

"D.2.5.1"

::= { lldpV2Xdot1LocVidUsageDigestEntry 1 }

--

-- lldpV2Xdot1LocManVidTable: Table of values configured on the Local
-- system for the Management VID, or the value 0 if a Management VID
-- has not been provisioned.

--

lldpV2Xdot1LocManVidTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpV2Xdot1LocManVidEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table contains one row per ifIndex/
destination MAC address pair for usage digest
information on the local system known to this agent."

REFERENCE

"D.2.6"

::= { lldpV2Xdot1LocalData 6 }

lldpV2Xdot1LocManVidEntry OBJECT-TYPE

SYNTAX LldpV2Xdot1LocManVidEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Usage digest information to be transmitted
through the given port."

REFERENCE

"D.2.6"

INDEX { lldpV2LocPortIfIndex }

::= { lldpV2Xdot1LocManVidTable 1 }

```
lldpV2Xdot1LocManVidEntry ::= SEQUENCE {
    lldpV2Xdot1LocManVid Unsigned32
}
```

lldpV2Xdot1LocManVid OBJECT-TYPE

SYNTAX Unsigned32 (0|1..4094)

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The integer value configured on the Local system for

```

        the Management VID, or
        the value 0 if a Management VID has not been provisioned."
REFERENCE
    "D.2.6.1"
 ::= { lldpV2Xdot1LocManVidEntry 1 }

-----
-- IEEE 802.1 - Local System Information - Link Aggregation
-----

---
---
--- lldpV2Xdot1LocLinkAggTable: Link Aggregation Information Table
---
---
lldpV2Xdot1LocLinkAggTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot1LocLinkAggEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per port of link aggregation
    information (as a part of the LLDP 802.1 organizational
    extension) on the local system known to this agent."
 ::= { lldpV2Xdot1LocalData 7 }

lldpV2Xdot1LocLinkAggEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot1LocLinkAggEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Link Aggregation information about a particular port
    component."
INDEX       { lldpV2LocPortIfIndex }
 ::= { lldpV2Xdot1LocLinkAggTable 1 }

LldpV2Xdot1LocLinkAggEntry ::= SEQUENCE {
    lldpV2Xdot1LocLinkAggStatus      LldpV2LinkAggStatusMap,
    lldpV2Xdot1LocLinkAggPortId     Unsigned32
}

lldpV2Xdot1LocLinkAggStatus OBJECT-TYPE
SYNTAX      LldpV2LinkAggStatusMap
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The bitmap value contains the link aggregation
    capabilities and the current aggregation status of the
    link."
REFERENCE
    "D.2.7.1"
 ::= { lldpV2Xdot1LocLinkAggEntry 1 }

lldpV2Xdot1LocLinkAggPortId OBJECT-TYPE
SYNTAX      Unsigned32 (0|1..2147483647)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object contains the IEEE 802.1 aggregated port

```

identifier, aAggPortID (IEEE Std 802.1AX, 6.3.2.1.1), derived from the ifNumber of the ifIndex for the port component in link aggregation.

If the port is not in link aggregation state and/or it does not support link aggregation, this value should be set to zero."

REFERENCE

"D.2.7.2"

::= { lldpV2Xdot1LocLinkAggEntry 2 }

-- IEEE 802.1 - Remote System Information

--

-- lldpV2Xdot1RemTable - re-indexed for ifIndex and destination MAC
-- address

lldpV2Xdot1RemTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpV2Xdot1RemEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table contains one or more rows per physical network connection known to this agent. The agent may wish to ensure that only one lldpV2Xdot1RemEntry is present for each local port, or it may choose to maintain multiple lldpV2Xdot1RemEntries for the same local port."

::= { lldpV2Xdot1RemoteData 1 }

lldpV2Xdot1RemEntry OBJECT-TYPE

SYNTAX LldpV2Xdot1RemEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Information about a particular port component."

INDEX { lldpV2RemTimeMark,
lldpV2RemLocalIfIndex,
lldpV2RemLocalDestMACAddress,
lldpV2RemIndex }

::= { lldpV2Xdot1RemTable 1 }

LldpV2Xdot1RemEntry ::= SEQUENCE {

lldpV2Xdot1RemPortVlanId Unsigned32

}

lldpV2Xdot1RemPortVlanId OBJECT-TYPE

SYNTAX Unsigned32 (0|1..4094)

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The integer value used to identify the port's VLAN identifier associated with the remote system. If the remote system either does not know the PVID or does not support Port-based VLAN operation, the value of lldpV2Xdot1RemPortVlanId should be zero."

```

REFERENCE
    "D.2.1.1"
 ::= { lldpV2Xdot1RemEntry 1 }

--
-- lldpV2Xdot1RemProtoVlanTable - re-indexed by ifIndex and
-- destination MAC address
--

lldpV2Xdot1RemProtoVlanTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemProtoVlanEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per Port and Protocol
        VLAN information about the remote system, received on the
        given port."
    ::= { lldpV2Xdot1RemoteData 2 }

lldpV2Xdot1RemProtoVlanEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemProtoVlanEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Port and protocol VLAN name Information about a particular
        port component. There may be multiple protocol VLANs,
        identified by a particular lldpV2Xdot1RemProtoVlanId,
        configured on the remote system."
    INDEX      { lldpV2RemTimeMark,
                lldpV2RemLocalIfIndex,
                lldpV2RemLocalDestMACAddress,
                lldpV2RemIndex,
                lldpV2Xdot1RemProtoVlanId }
    ::= { lldpV2Xdot1RemProtoVlanTable 1 }

LldpV2Xdot1RemProtoVlanEntry ::= SEQUENCE {
    lldpV2Xdot1RemProtoVlanId      Unsigned32,
    lldpV2Xdot1RemProtoVlanSupported TruthValue,
    lldpV2Xdot1RemProtoVlanEnabled TruthValue
}

lldpV2Xdot1RemProtoVlanId OBJECT-TYPE
    SYNTAX      Unsigned32 (0|1..4094)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The integer value used to identify the port and protocol
        VLANs associated with the given port associated with the
        remote system.

        If port and protocol VLANs are not supported on the given
        port associated with the remote system, or if the port is
        not enabled with any port and protocol VLAN, the value of
        lldpV2Xdot1RemProtoVlanId should be zero."
    REFERENCE
        "D.2.2.2"
    ::= { lldpV2Xdot1RemProtoVlanEntry 1 }

```

```

lldpV2Xdot1RemProtoVlanSupported OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the given port
        (associated with the remote system) is capable of
        supporting port and protocol VLANs."
    REFERENCE
        "D.2.2.1"
    ::= { lldpV2Xdot1RemProtoVlanEntry 2 }

lldpV2Xdot1RemProtoVlanEnabled OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the port and
        protocol VLANs are enabled on the given port associated
        with
        the remote system."
    REFERENCE
        "D.2.2.1"
    ::= { lldpV2Xdot1RemProtoVlanEntry 3 }

--
-- lldpV2Xdot1RemVlanNameTable : VLAN name information of the remote
--                               systems
-- Re-indexed by ifIndex and destination MAC address
--

lldpV2Xdot1RemVlanNameTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF lldpV2Xdot1RemVlanNameEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per IEEE 802.1Q VLAN
        name information about the remote system, received on the
        given port."
    REFERENCE
        "D.2.3"
    ::= { lldpV2Xdot1RemoteData 3 }

lldpV2Xdot1RemVlanNameEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemVlanNameEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "VLAN name Information about a particular port component.
        There may be multiple VLANs, identified by a particular
        lldpV2Xdot1RemVlanId, received on the given port."
    INDEX      { lldpV2RemTimeMark,
                lldpV2RemLocalIfIndex,
                lldpV2RemLocalDestMACAddress,
                lldpV2RemIndex,
                lldpV2Xdot1RemVlanId }

```

```

 ::= { lldpV2Xdot1RemVlanNameTable 1 }

LldpV2Xdot1RemVlanNameEntry ::= SEQUENCE {
    lldpV2Xdot1RemVlanId      VlanId,
    lldpV2Xdot1RemVlanName   SnmpAdminString
}

lldpV2Xdot1RemVlanId OBJECT-TYPE
    SYNTAX      VlanId
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The integer value used to identify the IEEE 802.1Q
        VLAN IDs with which the given port of the remote system
        is compatible."
    REFERENCE
        "D.2.3.2"
 ::= { lldpV2Xdot1RemVlanNameEntry 1 }

lldpV2Xdot1RemVlanName OBJECT-TYPE
    SYNTAX      SnmpAdminString (SIZE(1..32))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The string value used to identify VLAN name identified
        by the VLAN Id associated with the remote system."
    REFERENCE
        "D.2.3.4"
 ::= { lldpV2Xdot1RemVlanNameEntry 2 }

--
-- lldpV2Xdot1RemProtocolTable : Protocol information of the remote
-- systems Re-indexed by ifIndex and destination MAC address
--

lldpV2Xdot1RemProtocolTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemProtocolEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per protocol
        information about the remote system, received on
        the given port."
 ::= { lldpV2Xdot1RemoteData 4 }

lldpV2Xdot1RemProtocolEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemProtocolEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Protocol information about a particular port component.
        There may be multiple protocols, identified by a particular
        lldpV2Xdot1ProtocolIndex, received on the given port."
    INDEX      { lldpV2RemTimeMark,
                lldpV2RemLocalIfIndex,
                lldpV2RemLocalDestMACAddress,

```

```

        lldpV2RemIndex,
        lldpV2Xdot1RemProtocolIndex }
 ::= { lldpV2Xdot1RemProtocolTable 1 }

LldpV2Xdot1RemProtocolEntry ::= SEQUENCE {
    lldpV2Xdot1RemProtocolIndex    Unsigned32,
    lldpV2Xdot1RemProtocolId      OCTET STRING
}

lldpV2Xdot1RemProtocolIndex OBJECT-TYPE
    SYNTAX      Unsigned32(1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object represents an arbitrary local integer value
         used by this agent to identify a particular protocol
         identity."
 ::= { lldpV2Xdot1RemProtocolEntry 1 }

lldpV2Xdot1RemProtocolId OBJECT-TYPE
    SYNTAX      OCTET STRING (SIZE (1..255))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The octet string value used to identify the protocols
         associated with the given port of remote system."
    REFERENCE
        "D.2.4.3"
 ::= { lldpV2Xdot1RemProtocolEntry 2 }

--
-- lldpV2Xdot1RemVidUsageDigestTable: Table of hash values of
-- system VID Usage Table received
-- via VID Usage Digest TLV.
-- This version replaced by a reindexed version (V2).
--

lldpV2Xdot1RemVidUsageDigestTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemVidUsageDigestEntry
    MAX-ACCESS  not-accessible
    STATUS      deprecated
    DESCRIPTION
        "This table contains one row per ifIndex/
         destination MAC address pair for usage digest
         information received by the local system."
    REFERENCE
        "D.2.5"
 ::= { lldpV2Xdot1RemoteData 5 }

lldpV2Xdot1RemVidUsageDigestEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemVidUsageDigestEntry
    MAX-ACCESS  not-accessible
    STATUS      deprecated
    DESCRIPTION
        "Usage digest information received on
         the given port/destination address pair."

```

```

REFERENCE
    "D.2.5"
INDEX    { lldpV2RemTimeMark,
           lldpV2RemLocalIfIndex,
           lldpV2RemLocalDestMACAddress }
 ::= { lldpV2Xdot1RemVidUsageDigestTable 1 }

LldpV2Xdot1RemVidUsageDigestEntry ::= SEQUENCE {
    lldpV2Xdot1RemVidUsageDigest Unsigned32
}

lldpV2Xdot1RemVidUsageDigest OBJECT-TYPE
SYNTAX  Unsigned32
MAX-ACCESS read-only
STATUS  deprecated
DESCRIPTION
    "The integer value obtained by applying the CRC32 function
    to the 128-octet VID Usage Table. A bit of the VID Usage
    Table contains the value PBB-TE-USAGE (binary 1) if the
    corresponding element of the MST Configuration Table
    (IEEE Std 802.1Q 8.9.1) contains the value PBB-TE MSTID
    (hex FFE) and otherwise contains the value NON-PBB-TE-USAGE
    (binary 0)."
```

REFERENCE

```

    "D.2.5.1"
 ::= { lldpV2Xdot1RemVidUsageDigestEntry 1 }

--
-- lldpV2Xdot1RemManVidTable: Table of values configured on remote
-- systems for the Management VID, or the value 0 if a Management
-- VID has not been provisioned.
-- This version replaced by a reindexed version (V2).
--

lldpV2Xdot1RemManVidTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot1RemManVidEntry
MAX-ACCESS not-accessible
STATUS      deprecated
DESCRIPTION
    "This table contains one row per ifIndex/
    destination MAC address pair for management VID
    information received from remote systems."

REFERENCE
    "D.2.6"
 ::= { lldpV2Xdot1RemoteData 6 }

lldpV2Xdot1RemManVidEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot1RemManVidEntry
MAX-ACCESS not-accessible
STATUS      deprecated
DESCRIPTION
    "Management VID information received
    through the given port/destination address pair."

REFERENCE
    "D.2.6"
INDEX      { lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
```

```

        lldpV2RemLocalDestMACAddress }
 ::= { lldpV2Xdot1RemManVidTable 1 }

LldpV2Xdot1RemManVidEntry ::= SEQUENCE {
    lldpV2Xdot1RemManVid          Unsigned32
}

lldpV2Xdot1RemManVid OBJECT-TYPE
    SYNTAX Unsigned32 (0|1..4094)
    MAX-ACCESS read-only
    STATUS deprecated
    DESCRIPTION
        "The integer value configured on a system for
        the Management VID, or
        the value 0 if a Management VID has not been provisioned."
    REFERENCE
        "D.2.6.1"
 ::= { lldpV2Xdot1RemManVidEntry 1 }

--
-- lldpV2Xdot1RemVidUsageDigestV2Table: Table of hash values of
-- system VID Usage Table received
-- via VID Usage Digest TLV.
--

lldpV2Xdot1RemVidUsageDigestV2Table OBJECT-TYPE
    SYNTAX SEQUENCE OF LldpV2Xdot1RemVidUsageDigestV2Entry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "This table contains one row per ifIndex/
        destination MAC address pair for usage digest
        information received by the local system."
    REFERENCE
        "D.2.5"
 ::= { lldpV2Xdot1RemoteData 8 }

lldpV2Xdot1RemVidUsageDigestV2Entry OBJECT-TYPE
    SYNTAX LldpV2Xdot1RemVidUsageDigestV2Entry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "Usage digest information received on
        the given port/destination address pair."
    REFERENCE
        "D.2.5"
    INDEX { lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex }
 ::= { lldpV2Xdot1RemVidUsageDigestV2Table 1 }

LldpV2Xdot1RemVidUsageDigestV2Entry ::= SEQUENCE {
    lldpV2Xdot1RemVidUsageDigestV2 Unsigned32
}

```

```

lldpV2Xdot1RemVidUsageDigestV2 OBJECT-TYPE
    SYNTAX Unsigned32
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "The integer value obtained by applying the CRC32 function
        to the 128-octet VID Usage Table. A bit of the VID Usage
        Table contains the value PBB-TE-USAGE (binary 1) if the
        corresponding element of the MST Configuration Table
        (IEEE Std 802.1Q 8.9.1) contains the value PBB-TE MSTID
        (hex FFE) and otherwise contains the value NON-PBB-TE-USAGE
        (binary 0)."
```

REFERENCE

```

    "D.2.5.1"
 ::= { lldpV2Xdot1RemVidUsageDigestV2Entry 1 }
```

--

```

-- lldpV2Xdot1RemManVidV2Table: Table of values configured on remote
-- systems for the Management VID, or the value 0 if a Management
-- VID has not been provisioned.
--
```

```

lldpV2Xdot1RemManVidV2Table OBJECT-TYPE
    SYNTAX SEQUENCE OF LldpV2Xdot1RemManVidV2Entry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "This table contains one row per ifIndex/
        destination MAC address pair for management VID
        information received from remote systems."
    REFERENCE
        "D.2.6"
 ::= { lldpV2Xdot1RemoteData 9 }
```

```

lldpV2Xdot1RemManVidV2Entry OBJECT-TYPE
    SYNTAX LldpV2Xdot1RemManVidV2Entry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "Management VID information received
        through the given port/destination address pair."
    REFERENCE
        "D.2.6"
    INDEX { lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex }
 ::= { lldpV2Xdot1RemManVidV2Table 1 }
```

```

LldpV2Xdot1RemManVidV2Entry ::= SEQUENCE {
    lldpV2Xdot1RemManVidV2 Unsigned32
}

```

```

lldpV2Xdot1RemManVidV2 OBJECT-TYPE
    SYNTAX Unsigned32 (0|1..4094)
    MAX-ACCESS read-only
    STATUS current

```

```

DESCRIPTION
    "The integer value configured on a system for
    the Management VID, or
    the value 0 if a Management VID has not been provisioned."
REFERENCE
    "D.2.6.1"
 ::= { lldpV2Xdot1RemManVidV2Entry 1 }

-----
-- Remote System Information - Link Aggregation
-----

---
---
--- lldpV2Xdot1RemLinkAggTable: Link Aggregation Information Table
---
---
lldpV2Xdot1RemLinkAggTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemLinkAggEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains port link aggregation information
        (as a part of the LLDP IEEE 802.1 organizational extension)
        of the remote system."
    ::= { lldpV2Xdot1RemoteData 7 }

lldpV2Xdot1RemLinkAggEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemLinkAggEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Link Aggregation information about remote system's port
        component."
    INDEX       { lldpV2RemTimeMark,
                  lldpV2RemLocalIfIndex,
                  lldpV2RemLocalDestMACAddress,
                  lldpV2RemIndex }
    ::= { lldpV2Xdot1RemLinkAggTable 1 }

LldpV2Xdot1RemLinkAggEntry ::= SEQUENCE {
    lldpV2Xdot1RemLinkAggStatus      LldpV2LinkAggStatusMap,
    lldpV2Xdot1RemLinkAggPortId     Unsigned32
}

lldpV2Xdot1RemLinkAggStatus OBJECT-TYPE
    SYNTAX      LldpV2LinkAggStatusMap
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The bitmap value contains the link aggregation capabilities
        and the current aggregation status of the link."
    REFERENCE
        "D.2.7.1"
    ::= { lldpV2Xdot1RemLinkAggEntry 1 }

lldpV2Xdot1RemLinkAggPortId OBJECT-TYPE

```

```

SYNTAX      Unsigned32 (0|1..2147483647)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object contains the IEEE 802.1 aggregated port
    identifier, aAggPortID (IEEE Std 802.1AX, 6.3.2.1.1),
    derived from the ifNumber of the ifIndex for the port
    component associated with the remote system.

    If the remote port is not in link aggregation state and/or
    it does not support link aggregation, this value should be
    zero."
REFERENCE
    "D.2.7.2"
 ::= { lldpV2Xdot1RemLinkAggEntry 2 }

```

```

-----
-- Conformance Information for the basicSet TLV set
-----

```

```

lldpV2Xdot1Conformance
  OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 2 }
lldpV2Xdot1Compliances
  OBJECT IDENTIFIER ::= { lldpV2Xdot1Conformance 1 }
lldpV2Xdot1Groups
  OBJECT IDENTIFIER ::= { lldpV2Xdot1Conformance 2 }

-- compliance statements

lldpV2Xdot1TxRxCompliance MODULE-COMPLIANCE
  STATUS      current
  DESCRIPTION
    "A compliance statement for SNMP entities that implement
    the IEEE 802.1 organizationally defined LLDP extension MIB.

    This group is mandatory for all agents that implement the
    LLDP 802.1 organizational extension in TX and/or RX mode
    for the basicSet TLV set.

    This version defines compliance requirements for
    V2 of the LLDP MIB."
  MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot1ConfigGroup,
                       ifGeneralInformationGroup
    }
  ::= { lldpV2Xdot1Compliances 1 }

lldpV2Xdot1TxCompliance MODULE-COMPLIANCE
  STATUS      current
  DESCRIPTION
    "A compliance statement for SNMP entities that implement
    the IEEE 802.1 organizationally defined LLDP extension MIB.

    This group is mandatory for agents that implement the
    LLDP 802.1 organizational extension in the RX mode
    for the basicSet TLV set.

```

```

        This version defines compliance requirements for
        V2 of the LLDP MIB."
MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot1LocSysGroup }

 ::= { lldpV2Xdot1Compliances 2 }

lldpV2Xdot1RxCompliance MODULE-COMPLIANCE
STATUS deprecated
DESCRIPTION
    "A compliance statement for SNMP entities that implement
    the IEEE 802.1 organizationally defined LLDP extension MIB.

    This group is mandatory for agents that implement the
    LLDP 802.1 organizational extension in the RX mode
    for the basicSet TLV set.

    This version defines compliance requirements for
    V2 of the LLDP MIB."
MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot1RemSysGroup }

 ::= { lldpV2Xdot1Compliances 3 }

lldpV2Xdot1RxComplianceV2 MODULE-COMPLIANCE
STATUS current
DESCRIPTION
    "A compliance statement for SNMP entities that implement
    the IEEE 802.1 organizationally defined LLDP extension MIB.

    This group is mandatory for agents that implement the
    LLDP 802.1 organizational extension in the RX mode
    for the basicSet TLV set.

    This version defines compliance requirements for
    V2 of the LLDP MIB."
MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot1RemSysV2Group }

 ::= { lldpV2Xdot1Compliances 4 }

-- MIB groupings for the basicSet TLV set

lldpV2Xdot1ConfigGroup OBJECT-GROUP
OBJECTS {
    lldpV2Xdot1ConfigPortVlanTxEnable,
    lldpV2Xdot1ConfigVlanNameTxEnable,
    lldpV2Xdot1ConfigProtoVlanTxEnable,
    lldpV2Xdot1ConfigProtocolTxEnable,
    lldpV2Xdot1ConfigVidUsageDigestTxEnable,
    lldpV2Xdot1ConfigManVidTxEnable
}
STATUS current
DESCRIPTION
    "The collection of objects which are used to configure the
    IEEE 802.1 organizationally defined LLDP extension
    implementation behavior for the basicSet TLV set."

```

```

 ::= { lldpV2Xdot1Groups 1 }

lldpV2Xdot1LocSysGroup OBJECT-GROUP
  OBJECTS {
    lldpV2Xdot1LocPortVlanId,
    lldpV2Xdot1LocProtoVlanSupported,
    lldpV2Xdot1LocProtoVlanEnabled,
    lldpV2Xdot1LocVlanName,
    lldpV2Xdot1LocProtocolId,
    lldpV2Xdot1LocVidUsageDigest,
    lldpV2Xdot1LocManVid,
    lldpV2Xdot1LocLinkAggStatus,
    lldpV2Xdot1LocLinkAggPortId
  }
  STATUS current
  DESCRIPTION
    "The collection of objects which are used to represent
    IEEE 802.1 organizationally defined LLDP extension
    associated with the Local Device Information for the
    basicSet TLV set."
  ::= { lldpV2Xdot1Groups 2 }

lldpV2Xdot1RemSysGroup OBJECT-GROUP
  OBJECTS {
    lldpV2Xdot1RemPortVlanId,
    lldpV2Xdot1RemProtoVlanSupported,
    lldpV2Xdot1RemProtoVlanEnabled,
    lldpV2Xdot1RemVlanName,
    lldpV2Xdot1RemProtocolId,
    lldpV2Xdot1RemVidUsageDigest,
    lldpV2Xdot1RemManVid,
    lldpV2Xdot1RemLinkAggStatus,
    lldpV2Xdot1RemLinkAggPortId
  }
  STATUS deprecated
  DESCRIPTION
    "The collection of objects which are used to represent LLDP
    802.1 organizational extension Remote Device Information
    for the basicSet TLV set."
  ::= { lldpV2Xdot1Groups 3 }

lldpV2Xdot1RemSysV2Group OBJECT-GROUP
  OBJECTS {
    lldpV2Xdot1RemPortVlanId,
    lldpV2Xdot1RemProtoVlanSupported,
    lldpV2Xdot1RemProtoVlanEnabled,
    lldpV2Xdot1RemVlanName,
    lldpV2Xdot1RemProtocolId,
    lldpV2Xdot1RemVidUsageDigestV2,
    lldpV2Xdot1RemManVidV2,
    lldpV2Xdot1RemLinkAggStatus,
    lldpV2Xdot1RemLinkAggPortId
  }
  STATUS current
  DESCRIPTION
    "The collection of objects which are used to represent LLDP
    802.1 organizational extension Remote Device Information
    for the basicSet TLV set."
  ::= { lldpV2Xdot1Groups 3 }

```

```

-----
-----
--
-- Organizational Defined Information Extension - IEEE 802.1
-- Definitions to support the cnSet TLV set (Table D-1)
-- for Congestion Notification
--
-----
-----

lldpXdot1CnMIB OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 3 }
lldpXdot1CnObjects OBJECT IDENTIFIER ::= { lldpXdot1CnMIB 1 }

-- CN 802.1 MIB Extension groups

lldpXdot1CnConfig OBJECT IDENTIFIER ::= { lldpXdot1CnObjects 1 }
lldpXdot1CnLocalData OBJECT IDENTIFIER ::= { lldpXdot1CnObjects 2 }
lldpXdot1CnRemoteData OBJECT IDENTIFIER ::= { lldpXdot1CnObjects 3 }

-----
-- Textual conventions for Congestion Notification
-----

LldpV2CnBitVector ::= TEXTUAL-CONVENTION
    STATUS          current
    DESCRIPTION
        "This TC describes a bit vector used in the Congestion
        Notification objects. Each bit represents a Boolean status
        associated with a priority code point. A bit value of 0
        represents FALSE, 1 represents TRUE.

        The bit 'pri0status(0)' indicates the status for priority 0
        The bit 'pri1status(1)' indicates the status for priority 1
        The bit 'pri2status(2)' indicates the status for priority 2
        The bit 'pri3status(3)' indicates the status for priority 3
        The bit 'pri4status(4)' indicates the status for priority 4
        The bit 'pri5status(5)' indicates the status for priority 5
        The bit 'pri6status(6)' indicates the status for priority 6
        The bit 'pri7status(7)' indicates the status for priority 7"

    SYNTAX          BITS {
        pri0status(0),
        pri1status(1),
        pri2status(2),
        pri3status(3),
        pri4status(4),
        pri5status(5),
        pri6status(6),
        pri7status(7)
    }

-----
-- IEEE 802.1 - Congestion Notification Configuration
-----

--
-- lldpXdot1CnConfigCnTable : configure the
-- transmission of the Congestion Notification TLV on a set of ports

```

--

lldpXdot1CnConfigCnTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpXdot1CnConfigCnEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table that controls selection of Congestion Notification TLVs to be transmitted on individual ports."

::= { lldpXdot1CnConfig 1 }

lldpXdot1CnConfigCnEntry OBJECT-TYPE

SYNTAX LldpXdot1CnConfigCnEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"LLDP configuration information that controls the transmission of IEEE 802.1 organizationally defined Congestion Notification TLV on LLDP transmission capable ports.

This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated lldpV2PortConfigEntry entry.

Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry) after a re-initialization of the management system."

AUGMENTS { lldpV2PortConfigEntry }

::= { lldpXdot1CnConfigCnTable 1 }

LldpXdot1CnConfigCnEntry ::= SEQUENCE {

lldpXdot1CnConfigCnTxEnable TruthValue

}

lldpXdot1CnConfigCnTxEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The lldpXdot1CnConfigCnTxEnable, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined Congestion Notification TLV transmission is allowed on a given LLDP transmission capable port.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

REFERENCE

"D.2.8"

DEFVAL { false }

::= { lldpXdot1CnConfigCnEntry 1 }

-- IEEE 802.1 - Congestion Notification Local System Information


```

--- lldpV2Xdot1LocCnTable: Port Extension Information Table
---
---
lldpV2Xdot1LocCnTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot1LocCnEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per port of Congestion
    Notification information (as a part of the LLDP
    802.1 organizational extension) on the local system
    known to this agent."
 ::= { lldpXdot1CnLocalData 1 }

lldpV2Xdot1LocCnEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot1LocCnEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Congestion Notification information about a
    particular port component."
INDEX       { lldpV2LocPortIfIndex }
 ::= { lldpV2Xdot1LocCnTable 1 }

LldpV2Xdot1LocCnEntry ::= SEQUENCE {
    lldpV2Xdot1LocCNPVIndicators    LldpV2CnBitVector,
    lldpV2Xdot1LocReadyIndicators  LldpV2CnBitVector
}

lldpV2Xdot1LocCNPVIndicators OBJECT-TYPE
SYNTAX      LldpV2CnBitVector
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object contains the CNPV indicators
    for the Port."
REFERENCE
    "D.2.8.3"
 ::= { lldpV2Xdot1LocCnEntry 1 }

lldpV2Xdot1LocReadyIndicators OBJECT-TYPE
SYNTAX      LldpV2CnBitVector
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object contains the Ready indicators
    for the Port."
REFERENCE
    "D.2.8.4"
 ::= { lldpV2Xdot1LocCnEntry 2 }

```

```

-----
-- IEEE 802.1 - Congestion Notification Remote System Information
-----

```

```

---
---
--- lldpV2Xdot1RemCnTable: Port Extension Information Table
---

```

```

lldpV2Xdot1RemCnTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemCnEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains Congestion Notification information
        (as a part of the LLDP IEEE 802.1 organizational extension)
        of the remote system."
    ::= { lldpXdot1CnRemoteData 1 }

```

```

lldpV2Xdot1RemCnEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemCnEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Port Extension information about remote systems port
        component."
    INDEX      { lldpV2RemTimeMark,
                lldpV2RemLocalIfIndex,
                lldpV2RemLocalDestMACAddress,
                lldpV2RemIndex }
    ::= { lldpV2Xdot1RemCnTable 1 }

```

```

LldpV2Xdot1RemCnEntry ::= SEQUENCE {
    lldpV2Xdot1RemCNPVIndicators    LldpV2CnBitVector,
    lldpV2Xdot1RemReadyIndicators   LldpV2CnBitVector
}

```

```

lldpV2Xdot1RemCNPVIndicators OBJECT-TYPE
    SYNTAX      LldpV2CnBitVector
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains the CNPV indicators
        for the Port."
    REFERENCE
        "D.2.8.3"
    ::= { lldpV2Xdot1RemCnEntry 1 }

```

```

lldpV2Xdot1RemReadyIndicators OBJECT-TYPE
    SYNTAX      LldpV2CnBitVector
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains the Ready indicators
        for the Port."
    REFERENCE
        "D.2.8.4"
    ::= { lldpV2Xdot1RemCnEntry 2 }

```

```

-----
-- IEEE 802.1 - Congestion Notification Conformance Information
-----

```

```

lldpXdot1CnConformance OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 4 }

```

```

lldpXdot1CnCompliances
    OBJECT IDENTIFIER ::= { lldpXdot1CnConformance 1 }

```

```

lldpXdot1CnGroups OBJECT IDENTIFIER ::= { lldpXdot1CnConformance 2 }

--
-- Congestion Notification - Compliance Statements
--

lldpXdot1CnCompliance MODULE-COMPLIANCE
    STATUS          current
    DESCRIPTION
        "A compliance statement for SNMP entities that implement
        the IEEE 802.1 organizationally defined Congestion
        Notification LLDP extension MIB.

        This group is mandatory for agents that implement the
        Congestion Notification cnSet TLV set."
    MODULE          -- this module
    MANDATORY-GROUPS { lldpXdot1CnGroup,
                       ifGeneralInformationGroup }
    ::= { lldpXdot1CnCompliances 1 }

--
-- Congestion Notification - MIB groupings
--

lldpXdot1CnGroup OBJECT-GROUP
    OBJECTS {
        lldpXdot1CnConfigCnTxEnable,
        lldpV2Xdot1LocCNPVIndicators,
        lldpV2Xdot1LocReadyIndicators,
        lldpV2Xdot1RemCNPVIndicators,
        lldpV2Xdot1RemReadyIndicators
    }
    STATUS          current
    DESCRIPTION
        "The collection of objects that support the
        Congestion Notification cnSet TLV set."
    ::= { lldpXdot1CnGroups 1 }

-----
-----
--
-- Organizationally Defined Information Extension - IEEE 802.1
-- Definitions to support the Data Center eXchange Protocol
-- (DCBX) TLV set (Table D-1)
--
-----
-----
lldpXdot1dcbxMIB OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 5 }
lldpXdot1dcbxObjects OBJECT IDENTIFIER ::= { lldpXdot1dcbxMIB 1 }

-- DCBX 802.1 MIB Extension groups

lldpXdot1dcbxConfig OBJECT IDENTIFIER ::= { lldpXdot1dcbxObjects 1 }
lldpXdot1dcbxLocalData OBJECT IDENTIFIER ::= { lldpXdot1dcbxObjects 2 }
lldpXdot1dcbxRemoteData OBJECT IDENTIFIER ::= { lldpXdot1dcbxObjects 3 }
lldpXdot1dcbxAdminData OBJECT IDENTIFIER ::= { lldpXdot1dcbxObjects 4 }

-----

```

-- IEEE 802.1 - DCBX Textual Conventions

```
LldpXdot1dcbxTrafficClassValue ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "d"
    STATUS      current
    DESCRIPTION
        "Indicates a traffic class. Values 0-7 correspond to
        traffic classes."
    SYNTAX      Unsigned32 (0..7)

LldpXdot1dcbxTrafficClassBandwidthValue ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "d"
    STATUS      current
    DESCRIPTION
        "Indicates the bandwidth in percent assigned to a
        traffic class."
    SYNTAX      Unsigned32 (0..100)

LldpXdot1dcbxAppSelector ::= TEXTUAL-CONVENTION
    STATUS      current
    DESCRIPTION
        "Indicates the contents of a protocol object
        1: Ethertype
        2: Well Known Port number over TCP, or SCTP
        3: Well Known Port number over UDP, or DCCP
        4: Well Known Port number over TCP, SCTP, UDP, and DCCP
        5: Differentiated Services Code Point (DSCP) value. The
        6 bit DSCP value is stored in the low order 6 bits of the
        protocol object. The higher order bits are set to zero.
        (See IETF RFC 2474 for the definition of the DSCP value.)"
    SYNTAX INTEGER {
        asEthertype(1),
        asTCPPortNumber(2),
        asUDPPortNumber(3),
        asTCPUDPPortNumber(4),
        asDSCPValue(5)
    }

LldpXdot1dcbxAppProtocol ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "d"
    STATUS      current
    DESCRIPTION
        "Contains the application protocol indicator the
        type of which is specified by an object with
        the syntax of
        LldpXdot1dcbxAppSelector"
    SYNTAX      Unsigned32 (0..65535)

LldpXdot1dcbxSupportedCapacity ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "d"
    STATUS      current
    DESCRIPTION
        "Indicates the supported capacity of a given feature,
        for example, the number of traffic classes supported.
        This TC is used for features that have a maximum
        capacity of eight and a minimum of one."
    SYNTAX      Unsigned32 (1..8)
```

```

LldpXdot1dcbxTrafficSelectionAlgorithm ::= TEXTUAL-CONVENTION
    STATUS current
    DESCRIPTION
        "Indicates the Traffic Selection Algorithm
        0: Strict Priority
        1: Credit-based shaper
        2: Enhanced transmission selection
        3-254: Reserved for future standardization
        255: Vendor specific"
    SYNTAX INTEGER {
        tsaStrictPriority(0),
        tsaCreditBasedShaper(1),
        tsaEnhancedTransmission(2),
        tsaVendorSpecific(255)
    }

```

```

-- IEEE 802.1 - DCBX Configuration
-----

```

```

--
-- lldpXdot1dcbxConfigETSConfigurationTable : configure the
-- transmission of the ETS Configuration TLV on a set of ports
--

```

```

lldpXdot1dcbxConfigETSConfigurationTable OBJECT-TYPE
    SYNTAX SEQUENCE OF LldpXdot1dcbxConfigETSConfigurationEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "A table that controls selection of ETS Configuration
        TLVs to be transmitted on individual ports."
    ::= { lldpXdot1dcbxConfig 1 }

```

```

lldpXdot1dcbxConfigETSConfigurationEntry OBJECT-TYPE
    SYNTAX LldpXdot1dcbxConfigETSConfigurationEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "LLDP configuration information that controls the
        transmission of IEEE 802.1 organizationally defined
        ETS Configuration TLV on LLDP transmission capable ports.

        This configuration object augments the lldpV2PortConfigEntry of
        the LLDP-MIB, therefore it is only present along with the port
        configuration defined by the associated lldpV2PortConfigEntry
        entry.

        Each active lldpConfigEntry is restored from non-volatile
        storage (along with the corresponding lldpV2PortConfigEntry)
        after a re-initialization of the management system."
    AUGMENTS { lldpV2PortConfigEntry }
    ::= { lldpXdot1dcbxConfigETSConfigurationTable 1 }

```

```

LldpXdot1dcbxConfigETSConfigurationEntry ::= SEQUENCE {
    lldpXdot1dcbxConfigETSConfigurationTxEnable TruthValue
}

```

```

lldpXdot1dcbxConfigETSConfigurationTxEnable OBJECT-TYPE

```

```

SYNTAX      TruthValue
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "The lldpXdot1dcbxConfigETSConfigurationTxEnable, which is
    defined as a truth value and configured by the network
    management, determines whether the IEEE 802.1 organizationally
    defined ETS Configuration TLV transmission is allowed on a
    given LLDP transmission capable port.

    The value of this object is restored from non-volatile
    storage after a re-initialization of the management system."
REFERENCE
    "D.2.9"
DEFVAL      { false }
::= { lldpXdot1dcbxConfigETSConfigurationEntry 1 }

--
-- lldpXdot1dcbxConfigETSRecommendationTable : configure the
-- transmission of the ETS Recommendation TLV on a set of ports
--

lldpXdot1dcbxConfigETSRecommendationTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpXdot1dcbxConfigETSRecommendationEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table that controls selection of ETS Recommendation
        TLVs to be transmitted on individual ports."
    ::= { lldpXdot1dcbxConfig 2 }

lldpXdot1dcbxConfigETSRecommendationEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxConfigETSRecommendationEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "LLDP configuration information that controls the
        transmission of IEEE 802.1 organizationally defined
        ETS Recommendation TLV on LLDP transmission capable ports.

        This configuration object augments the lldpV2PortConfigEntry of
        the LLDP-MIB, therefore it is only present along with the port
        configuration defined by the associated lldpV2PortConfigEntry
        entry.

        Each active lldpConfigEntry is restored from non-volatile
        storage (along with the corresponding lldpV2PortConfigEntry)
        after a re-initialization of the management system."
    AUGMENTS   { lldpV2PortConfigEntry }
    ::= { lldpXdot1dcbxConfigETSRecommendationTable 1 }

LldpXdot1dcbxConfigETSRecommendationEntry ::= SEQUENCE {
    lldpXdot1dcbxConfigETSRecommendationTxEnable TruthValue
}

lldpXdot1dcbxConfigETSRecommendationTxEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-write
    STATUS      current

```

DESCRIPTION

"The `lldpXdot1dcbxConfigETSRecommendationTxEnable`, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined ETS Recommendation TLV transmission is allowed on a given LLDP transmission capable port.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

REFERENCE

"D.2.10"

DEFVAL { false }

::= { lldpXdot1dcbxConfigETSRecommendationEntry 1 }

--

-- `lldpXdot1dcbxConfigPFCTable` : configure the transmission of the
-- Priority-based Flow Control Configuration TLV on a set of ports
--

`lldpXdot1dcbxConfigPFCTable` OBJECT-TYPE

SYNTAX SEQUENCE OF `LldpXdot1dcbxConfigPFCEnt`

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table that controls selection of Priority-based Flow Control Configuration TLVs to be transmitted on individual ports."

::= { lldpXdot1dcbxConfig 3 }

`lldpXdot1dcbxConfigPFCEnt` OBJECT-TYPE

SYNTAX `LldpXdot1dcbxConfigPFCEnt`

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"LLDP configuration information that controls the transmission of IEEE 802.1 organizationally defined Priority-based Flow Control Configuration TLV on LLDP transmission capable ports.

This configuration object augments the `lldpV2PortConfigEntry` of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated `lldpV2PortConfigEntry` entry.

Each active `lldpConfigEntry` is restored from non-volatile storage (along with the corresponding `lldpV2PortConfigEntry`) after a re-initialization of the management system."

AUGMENTS { `lldpV2PortConfigEntry` }

::= { lldpXdot1dcbxConfigPFCTable 1 }

```
LldpXdot1dcbxConfigPFCEnt ::= SEQUENCE {
    lldpXdot1dcbxConfigPFCTxEnable TruthValue
}
```

`lldpXdot1dcbxConfigPFCTxEnable` OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The `lldpXdot1dcbxConfigPFCTxEnable`, which is defined as a truth value and configured by the network management,

determines whether the IEEE 802.1 organizationally defined Priority-based Flow Control Configuration TLV transmission is allowed on a given LLDP transmission capable port.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

REFERENCE

"D.2.11"

DEFVAL { false }

::= { lldpXdot1dcbxConfigPFCEEntry 1 }

--

-- lldpXdot1dcbxConfigApplicationPriorityTable : configure the
-- transmission of the Application Priority TLV on a set of ports

--

lldpXdot1dcbxConfigApplicationPriorityTable OBJECT-TYPE

SYNTAX SEQUENCE OF

LldpXdot1dcbxConfigApplicationPriorityEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table that controls selection of Priority-based Flow Control Configuration TLVs to be transmitted on individual ports."

::= { lldpXdot1dcbxConfig 4 }

lldpXdot1dcbxConfigApplicationPriorityEntry OBJECT-TYPE

SYNTAX LldpXdot1dcbxConfigApplicationPriorityEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"LLDP configuration information that controls the transmission of IEEE 802.1 organizationally defined Application Priority TLV on LLDP transmission capable ports.

This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated lldpV2PortConfigEntry entry.

Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry) after a re-initialization of the management system."

AUGMENTS { lldpV2PortConfigEntry }

::= { lldpXdot1dcbxConfigApplicationPriorityTable 1 }

LldpXdot1dcbxConfigApplicationPriorityEntry ::= SEQUENCE {
lldpXdot1dcbxConfigApplicationPriorityTxEnable TruthValue

lldpXdot1dcbxConfigApplicationPriorityTxEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The lldpXdot1dcbxConfigApplicationPriorityTxEnable, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined Application Priority TLV transmission is allowed on

a given LLDP transmission capable port.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

REFERENCE

"D.2.12"

DEFVAL { false }

::= { lldpXdot1dcbxConfigApplicationPriorityEntry 1 }

--

-- lldpXdot1dcbxConfigApplicationVlanTable : configure the
-- transmission of the Application VLAN TLV on a set of ports
--

lldpXdot1dcbxConfigApplicationVlanTable OBJECT-TYPE

SYNTAX SEQUENCE OF

lldpXdot1dcbxConfigApplicationVlanEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table that controls selection of Application VLAN TLVs to be transmitted on individual ports."

::= { lldpXdot1dcbxConfig 5 }

lldpXdot1dcbxConfigApplicationVlanEntry OBJECT-TYPE

SYNTAX lldpXdot1dcbxConfigApplicationVlanEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"LLDP configuration information that controls the transmission of IEEE 802.1 organizationally defined Application VLAN TLV on LLDP transmission capable ports.

This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated lldpV2PortConfigEntry entry.

Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry) after a re-initialization of the management system."

AUGMENTS { lldpV2PortConfigEntry }

::= { lldpXdot1dcbxConfigApplicationVlanTable 1 }

lldpXdot1dcbxConfigApplicationVlanEntry ::= SEQUENCE {

lldpXdot1dcbxConfigApplicationVlanTxEnable TruthValue

}

lldpXdot1dcbxConfigApplicationVlanTxEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The lldpXdot1dcbxConfigApplicationVlanTxEnable, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined Application VLAN TLV transmission is allowed on a given LLDP transmission capable port.

```

    The value of this object is restored from non-volatile
    storage after a re-initialization of the management system."
REFERENCE
    "D.2.15"
DEFVAL      { false }
 ::= { lldpXdot1dcbxConfigApplicationVlanEntry 1 }

-----
-- IEEE 802.1 - DCBX Local System Information
-----

--
-- lldpXdot1dcbxLocETSConfigurationTable - Contains the information
-- for the ETS Configuration TLV.
--
lldpXdot1dcbxLocETSConfiguration OBJECT IDENTIFIER
 ::= { lldpXdot1dcbxLocalData 1 }

lldpXdot1dcbxLocETSBasicConfigurationTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpXdot1dcbxLocETSBasicConfigurationEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per port for the IEEE 802.1
    organizationally defined LLDP ETS Configuration TLV on
    the local system known to this agent"
 ::= { lldpXdot1dcbxLocETSConfiguration 1 }

lldpXdot1dcbxLocETSBasicConfigurationEntry OBJECT-TYPE
SYNTAX      LldpXdot1dcbxLocETSBasicConfigurationEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Information about the IEEE 802.1 organizational defined
    ETS Configuration TLV LLDP extension."
INDEX       { lldpV2LocPortIfIndex }
 ::= { lldpXdot1dcbxLocETSBasicConfigurationTable 1 }

lldpXdot1dcbxLocETSBasicConfigurationEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSConCreditBasedShaperSupport TruthValue,
    lldpXdot1dcbxLocETSConTrafficClassesSupported
        LldpXdot1dcbxSupportedCapacity,
    lldpXdot1dcbxLocETSConWilling TruthValue
}

lldpXdot1dcbxLocETSConCreditBasedShaperSupport OBJECT-TYPE
SYNTAX      TruthValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Indicates if the credit-based shaper Traffic Selection
    Algorithm is supported on the local system."
REFERENCE
    "D.2.9.4"
 ::= { lldpXdot1dcbxLocETSBasicConfigurationEntry 1 }

lldpXdot1dcbxLocETSConTrafficClassesSupported OBJECT-TYPE
SYNTAX      LldpXdot1dcbxSupportedCapacity
MAX-ACCESS  read-only

```

```

STATUS          current
DESCRIPTION
  "Indicates the number of traffic classes supported."
REFERENCE
  "D.2.9.5"
 ::= { lldpXdot1dcbxLocETSTBasicConfigurationEntry 2 }

lldpXdot1dcbxLocETSTConWilling OBJECT-TYPE
SYNTAX          TruthValue
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
  "Indicates if the local system is willing to accept the
  ETS configuration recommended by the remote system."
REFERENCE
  "D.2.9.3"
 ::= { lldpXdot1dcbxLocETSTBasicConfigurationEntry 3 }

lldpXdot1dcbxLocETSTConPriorityAssignmentTable OBJECT-TYPE
SYNTAX          SEQUENCE OF
                LldpXdot1dcbxLocETSTConPriorityAssignmentEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
  "This table contains one row per priority. The entry in each
  row indicates the traffic class to which the priority is
  assigned."
 ::= { lldpXdot1dcbxLocETSTConfiguration 2 }

lldpXdot1dcbxLocETSTConPriorityAssignmentEntry OBJECT-TYPE
SYNTAX          LldpXdot1dcbxLocETSTConPriorityAssignmentEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
  "Indicates a priority to traffic class assignment."
INDEX
  {
    lldpV2LocPortIfIndex,
    lldpXdot1dcbxLocETSTConPriority
  }
 ::= { lldpXdot1dcbxLocETSTConPriorityAssignmentTable 1 }

LldpXdot1dcbxLocETSTConPriorityAssignmentEntry ::= SEQUENCE {
  lldpXdot1dcbxLocETSTConPriority      IEEE8021PriorityValue,
  lldpXdot1dcbxLocETSTConPriTrafficClass
    LldpXdot1dcbxTrafficClassValue
}

lldpXdot1dcbxLocETSTConPriority OBJECT-TYPE
SYNTAX          IEEE8021PriorityValue
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
  "Indicates the priority that is assigned to a traffic
  class."
REFERENCE
  "D.2.9.6"
 ::= { lldpXdot1dcbxLocETSTConPriorityAssignmentEntry 1 }

lldpXdot1dcbxLocETSTConPriTrafficClass OBJECT-TYPE

```

```

SYNTAX          LldpXdot1dcbxTrafficClassValue
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "Indicates the traffic class to which this priority is
    to be assigned."
REFERENCE
    "D.2.9.6"
::= { lldpXdot1dcbxLocETSConPriorityAssignmentEntry 2 }

lldpXdot1dcbxLocETSConTrafficClassBandwidthTable OBJECT-TYPE
SYNTAX          SEQUENCE OF
                LldpXdot1dcbxLocETSConTrafficClassBandwidthEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "This table contains one row per traffic class. The
    entry in each row indicates the traffic class to
    which the bandwidth is assigned."
::= { lldpXdot1dcbxLocETSConfiguration 3 }

lldpXdot1dcbxLocETSConTrafficClassBandwidthEntry OBJECT-TYPE
SYNTAX          LldpXdot1dcbxLocETSConTrafficClassBandwidthEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates a traffic class to Bandwidth assignment."
INDEX          {
                lldpV2LocPortIfIndex,
                lldpXdot1dcbxLocETSConTrafficClass
            }
::= { lldpXdot1dcbxLocETSConTrafficClassBandwidthTable 1 }

lldpXdot1dcbxLocETSConTrafficClassBandwidthEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSConTrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxLocETSConTrafficClassBandwidth
        LldpXdot1dcbxTrafficClassBandwidthValue
}

lldpXdot1dcbxLocETSConTrafficClass OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassValue
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates the traffic class to
    which this bandwidth applies"
REFERENCE
    "D.2.9.7"
::= { lldpXdot1dcbxLocETSConTrafficClassBandwidthEntry 1 }

lldpXdot1dcbxLocETSConTrafficClassBandwidth OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassBandwidthValue
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "Indicates the bandwidth assigned to this traffic class."
REFERENCE
    "D.2.9.7"

```

```

 ::= { lldpXdot1dcbxLocETSConTrafficClassBandwidthEntry 2 }

lldpXdot1dcbxLocETSConTrafficSelectionAlgorithmTable OBJECT-TYPE
SYNTAX          SEQUENCE OF
                  LldpXdot1dcbxLocETSConTrafficSelectionAlgorithmEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "This table contains one row per traffic class. The entry
    in each row indicates the traffic selection algorithm to be
    used by the traffic class."
 ::= { lldpXdot1dcbxLocETSConfiguration 4 }

lldpXdot1dcbxLocETSConTrafficSelectionAlgorithmEntry OBJECT-TYPE
SYNTAX          LldpXdot1dcbxLocETSConTrafficSelectionAlgorithmEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates a traffic class to traffic selection algorithm
    assignment."
INDEX           {
                  lldpV2LocPortIfIndex,
                  lldpXdot1dcbxLocETSConTSATrafficClass
                }
 ::= { lldpXdot1dcbxLocETSConTrafficSelectionAlgorithmTable 1 }

LldpXdot1dcbxLocETSConTrafficSelectionAlgorithmEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSConTSATrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxLocETSConTrafficSelectionAlgorithm
        LldpXdot1dcbxTrafficSelectionAlgorithm
}

lldpXdot1dcbxLocETSConTSATrafficClass OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassValue
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates the traffic class that is assigned to a traffic
    selection algorithm."
REFERENCE
    "D.2.9.8"
 ::= { lldpXdot1dcbxLocETSConTrafficSelectionAlgorithmEntry 1 }

lldpXdot1dcbxLocETSConTrafficSelectionAlgorithm OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficSelectionAlgorithm
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "Indicates the Traffic Selection Algorithm to which this
    traffic class is to be assigned."
REFERENCE
    "D.2.9.8"
 ::= { lldpXdot1dcbxLocETSConTrafficSelectionAlgorithmEntry 2 }

--
-- lldpXdot1dcbxLocETSRecommendationTable - Contains the information for
-- the ETS Recommendation TLV.

```

--

```
lldpXdot1dcbxLocETSReco OBJECT IDENTIFIER ::=
  { lldpXdot1dcbxLocalData 2 }
```

```
lldpXdot1dcbxLocETSRecoTrafficClassBandwidthTable OBJECT-TYPE
  SYNTAX          SEQUENCE OF
    LldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry
  MAX-ACCESS      not-accessible
  STATUS          current
  DESCRIPTION
    "This table contains one row per traffic class. The
    entry in each row indicates the traffic class to
    which the bandwidth is assigned."
  ::= { lldpXdot1dcbxLocETSReco 1 }
```

```
lldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry OBJECT-TYPE
  SYNTAX          LldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry
  MAX-ACCESS      not-accessible
  STATUS          current
  DESCRIPTION
    "Indicates a traffic class to Bandwidth assignment."
  INDEX          {
    lldpV2LocPortIfIndex,
    lldpXdot1dcbxLocETSRecoTrafficClass
  }
  ::= { lldpXdot1dcbxLocETSRecoTrafficClassBandwidthTable 1 }
```

```
LldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry ::= SEQUENCE {
  lldpXdot1dcbxLocETSRecoTrafficClass
    LldpXdot1dcbxTrafficClassValue,
  lldpXdot1dcbxLocETSRecoTrafficClassBandwidth
    LldpXdot1dcbxTrafficClassBandwidthValue
}
```

```
lldpXdot1dcbxLocETSRecoTrafficClass OBJECT-TYPE
  SYNTAX          LldpXdot1dcbxTrafficClassValue
  MAX-ACCESS      not-accessible
  STATUS          current
  DESCRIPTION
    "Indicates the traffic class to
    which this bandwidth applies"
  REFERENCE
    "D.2.10.3"
  ::= { lldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry 1 }
```

```
lldpXdot1dcbxLocETSRecoTrafficClassBandwidth OBJECT-TYPE
  SYNTAX          LldpXdot1dcbxTrafficClassBandwidthValue
  MAX-ACCESS      read-only
  STATUS          current
  DESCRIPTION
    "Indicates the bandwidth assigned to this traffic class."
  REFERENCE
    "D.2.10.4"
  ::= { lldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry 2 }
```

```
lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmTable OBJECT-TYPE
  SYNTAX          SEQUENCE OF
    LldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry
  MAX-ACCESS      not-accessible
```

```

STATUS          current
DESCRIPTION
    "This table contains one row per priority. The entry in each
    row indicates the traffic selection algorithm to be used
    by the traffic class."
 ::= { lldpXdot1dcbxLocETSReco 2 }

lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry OBJECT-TYPE
SYNTAX          LldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates a priority to traffic selection algorithm
    assignment."
INDEX           {
                lldpV2LocPortIfIndex,
                lldpXdot1dcbxLocETSRecoTSATrafficClass
            }
 ::= { lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmTable 1 }

LldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSRecoTSATrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithm
        LldpXdot1dcbxTrafficSelectionAlgorithm
}

lldpXdot1dcbxLocETSRecoTSATrafficClass OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassValue
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates the traffic class that is assigned to a traffic
    selection algorithm."
REFERENCE
    "D.2.10.5"
 ::= { lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry 1 }

lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithm OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficSelectionAlgorithm
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "Indicates the Traffic Selection Algorithm to which this
    traffic class is to be assigned."
REFERENCE
    "D.2.10.5"
 ::= { lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry 2 }

-- lldpXdot1dcbxLocPFCTable - Contains the information for the PFC
-- Configuration TLV.
--
lldpXdot1dcbxLocPFC OBJECT IDENTIFIER ::= { lldpXdot1dcbxLocalData 3 }

lldpXdot1dcbxLocPFCBasicTable OBJECT-TYPE
SYNTAX          SEQUENCE OF LldpXdot1dcbxLocPFCBasicEntry
MAX-ACCESS      not-accessible
STATUS          current

```

```

DESCRIPTION
    "This table contains one row per port for the IEEE 802.1
    organizationally defined LLDP PFC TLV on the local
    system known to this agent"
 ::= { lldpXdot1dcbxLocPFC 1 }

lldpXdot1dcbxLocPFCBasicEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxLocPFCBasicEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about the IEEE 802.1 organizational defined
        PFC TLV LLDP extension."
    INDEX       { lldpV2LocPortIfIndex }
    ::= { lldpXdot1dcbxLocPFCBasicTable 1 }

LldpXdot1dcbxLocPFCBasicEntry ::= SEQUENCE {
    lldpXdot1dcbxLocPFCWilling      TruthValue,
    lldpXdot1dcbxLocPFCMBC         TruthValue,
    lldpXdot1dcbxLocPFCFCap       LldpXdot1dcbxSupportedCapacity
}

lldpXdot1dcbxLocPFCWilling OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "Indicates if the local system is willing to accept the
        PFC configuration of the remote system."
    REFERENCE
        "D.2.11.3"
    ::= { lldpXdot1dcbxLocPFCBasicEntry 1}

lldpXdot1dcbxLocPFCMBC OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "Indicates if the local system is capable of bypassing
        MACsec processing when MACsec is disabled."
    REFERENCE
        "D.2.11.4"
    ::= { lldpXdot1dcbxLocPFCBasicEntry 2}

lldpXdot1dcbxLocPFCFCap OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxSupportedCapacity
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "Indicates the number of traffic classes on the local device
        that may simultaneously have PFC enabled."
    REFERENCE
        "D.2.11.5"
    ::= { lldpXdot1dcbxLocPFCBasicEntry 3}

lldpXdot1dcbxLocPFCEnableTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpXdot1dcbxLocPFCEnableEntry
    MAX-ACCESS  not-accessible
    STATUS      current

```

DESCRIPTION

"This table contains eight entries, one entry per priority, indicating if PFC is enabled on the corresponding priority."
 ::= { lldpXdot1dcbxLocPFC 2 }

lldpXdot1dcbxLocPFCEnableEntry OBJECT-TYPE

SYNTAX LldpXdot1dcbxLocPFCEnableEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Each entry indicates if PFC is enabled on the corresponding priority"

INDEX {

lldpV2LocPortIfIndex,

lldpXdot1dcbxLocPFCEnablePriority

}

::= { lldpXdot1dcbxLocPFCEnableTable 1 }

LldpXdot1dcbxLocPFCEnableEntry ::= SEQUENCE {

lldpXdot1dcbxLocPFCEnablePriority IEEE8021PriorityValue,

lldpXdot1dcbxLocPFCEnableEnabled TruthValue

}

lldpXdot1dcbxLocPFCEnablePriority OBJECT-TYPE

SYNTAX IEEE8021PriorityValue

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Priority for which PFC is enabled/disabled"

::= { lldpXdot1dcbxLocPFCEnableEntry 1 }

lldpXdot1dcbxLocPFCEnableEnabled OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Indicates if PFC is enabled on the corresponding priority"

REFERENCE

"D.2.11.6"

::= { lldpXdot1dcbxLocPFCEnableEntry 2 }

--

-- lldpXdot1dcbxLocApplicationPriorityTable - Contains the information

-- for the Application Priority TLV.

--

lldpXdot1dcbxLocApplicationPriorityAppTable OBJECT-TYPE

SYNTAX SEQUENCE OF

LldpXdot1dcbxLocApplicationPriorityAppEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Table containing entries indicating the priority to be used for a given application"

::= { lldpXdot1dcbxLocalData 4 }

lldpXdot1dcbxLocApplicationPriorityAppEntry OBJECT-TYPE

SYNTAX LldpXdot1dcbxLocApplicationPriorityAppEntry

MAX-ACCESS not-accessible

STATUS current

```

DESCRIPTION
    "Entry that indicates the priority to be used for a
    given application."
INDEX
    {
        lldpV2LocPortIfIndex,
        lldpXdot1dcbxLocApplicationPriorityAESelector,
        lldpXdot1dcbxLocApplicationPriorityAEProtocol
    }
    ::= { lldpXdot1dcbxLocApplicationPriorityAppTable 1 }

lldpXdot1dcbxLocApplicationPriorityAppEntry ::= SEQUENCE {
    lldpXdot1dcbxLocApplicationPriorityAESelector
        LldpXdot1dcbxAppSelector,
    lldpXdot1dcbxLocApplicationPriorityAEProtocol
        LldpXdot1dcbxAppProtocol,
    lldpXdot1dcbxLocApplicationPriorityAEPriority
        IEEE8021PriorityValue
}

lldpXdot1dcbxLocApplicationPriorityAESelector OBJECT-TYPE
SYNTAX      LldpXdot1dcbxAppSelector
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Indicates the contents of the protocol object
    (lldpXdot1dcbxLocApplicationPriorityAEProtocol)
    1: Ethertype
    2: Well Known Port number over TCP, or SCTP
    3: Well Known Port number over UDP, or DCCP
    4: Well Known Port number over TCP, SCTP, UDP, and DCCP
    5: Differentiated Services Code Point (DSCP) value. The
    6 bit DSCP value is stored in the low order 6 bits of the
    protocol object. The higher order bits are set to zero.
    (See IETF RFC 2474 for the definition of the DSCP value.)"
REFERENCE
    "D.2.12.3"
    ::= { lldpXdot1dcbxLocApplicationPriorityAppEntry 1 }

lldpXdot1dcbxLocApplicationPriorityAEProtocol OBJECT-TYPE
SYNTAX      LldpXdot1dcbxAppProtocol
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "The protocol indicator of the type indicated by
    lldpXdot1dcbxLocApplicationPriorityAESelector."
REFERENCE
    "D.2.12.3"
    ::= { lldpXdot1dcbxLocApplicationPriorityAppEntry 2 }

lldpXdot1dcbxLocApplicationPriorityAEPriority OBJECT-TYPE
SYNTAX      IEEE8021PriorityValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The priority code point that should be used in
    frames transporting the protocol indicated by
    lldpXdot1dcbxLocApplicationPriorityAESelector and
    lldpXdot1dcbxLocApplicationPriorityAEProtocol"
REFERENCE

```

```

        "D.2.12.3"
        ::= { lldpXdot1dcbxLocApplicationPriorityAppEntry 3 }

--
-- lldpXdot1dcbxLocApplicationVlanAppTable - Contains the information
-- for the Application VLAN TLV.
--

lldpXdot1dcbxLocApplicationVlanAppTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
                    LldpXdot1dcbxLocApplicationVlanAppEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table containing entries indicating the VLAN to be used
        for a given application"
    ::= { lldpXdot1dcbxLocalData 5 }

lldpXdot1dcbxLocApplicationVlanAppEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxLocApplicationVlanAppEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Entry that indicates the VLAN to be used for a
        given application."
    INDEX
        {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxLocApplicationVlanAESelector,
            lldpXdot1dcbxLocApplicationVlanAEProtocol
        }
    ::= { lldpXdot1dcbxLocApplicationVlanAppTable 1 }

LldpXdot1dcbxLocApplicationVlanAppEntry ::= SEQUENCE {
    lldpXdot1dcbxLocApplicationVlanAESelector
        LldpXdot1dcbxAppSelector,
    lldpXdot1dcbxLocApplicationVlanAEProtocol
        LldpXdot1dcbxAppProtocol,
    lldpXdot1dcbxLocApplicationVlanAEVlanId
        VlanId
}

lldpXdot1dcbxLocApplicationVlanAESelector OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAppSelector
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the contents of the protocol object
        (lldpXdot1dcbxLocApplicationVlanAEProtocol)
        1: Ethertype
        2: Well Known Port number over TCP, or SCTP
        3: Well Known Port number over UDP, or DCCP
        4: Well Known Port number over TCP, SCTP, UDP, and DCCP
        5: Differentiated Services Code Point (DSCP) value. The
        6 bit DSCP value is stored in the low order 6 bits of the
        protocol object. The higher order bits are set to zero.
        (See IETF RFC 2474 for the definition of the DSCP value.)"
    REFERENCE
        "D.2.12.3"
    ::= { lldpXdot1dcbxLocApplicationVlanAppEntry 1 }

```

```

lldpXdot1dcbxLocApplicationVlanAEProtocol OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxAppProtocol
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The protocol indicator of the type indicated by
         lldpXdot1dcbxLocApplicationVlanAESelector."
    REFERENCE
        "D.2.12.3"
    ::= { lldpXdot1dcbxLocApplicationVlanAppEntry 2 }

lldpXdot1dcbxLocApplicationVlanAEVlanId OBJECT-TYPE
    SYNTAX      VlanId
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The VLAN Identifier that should be used in
         frames transporting the protocol indicated by
         lldpXdot1dcbxLocApplicationVlanAESelector and
         lldpXdot1dcbxLocApplicationVlanAEProtocol"
    REFERENCE
        "D.2.15.3"
    ::= { lldpXdot1dcbxLocApplicationVlanAppEntry 3 }

-----
-- IEEE 802.1 - DCBX Remote System Information
-----

--
-- lldpXdot1dcbxRemETSConfigurationTable - Contains the information
-- for the remote system ETS Configuration TLV.
--
lldpXdot1dcbxRemETSConfiguration OBJECT IDENTIFIER
    ::= { lldpXdot1dcbxRemoteData 1 }

lldpXdot1dcbxRemETSBasicConfigurationTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpXdot1dcbxRemETSBasicConfigurationEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one row per port for the IEEE 802.1
         organizationally defined LLDP ETS Configuration TLV on
         the local system known to this agent"
    ::= { lldpXdot1dcbxRemETSConfiguration 1 }

lldpXdot1dcbxRemETSBasicConfigurationEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxRemETSBasicConfigurationEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about the IEEE 802.1 organizational defined
         ETS Configuration TLV LLDP extension."
    INDEX      {
        lldpV2RemTimeMark,
        lldpV2RemLocalIfIndex,
        lldpV2RemLocalDestMACAddress,
        lldpV2RemIndex
    }

```

```

    }
    ::= { lldpXdot1dcbxRemETSSBasicConfigurationTable 1 }

LldpXdot1dcbxRemETSSBasicConfigurationEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSSConCreditBasedShaperSupport      TruthValue,
    lldpXdot1dcbxRemETSSConTrafficClassesSupported
        LldpXdot1dcbxSupportedCapacity,
    lldpXdot1dcbxRemETSSConWilling      TruthValue
}

lldpXdot1dcbxRemETSSConCreditBasedShaperSupport OBJECT-TYPE
SYNTAX      TruthValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Indicates if the credit-based shaper Traffic Selection
    algorithm is supported on the remote system."
REFERENCE
    "D.2.9.4"
::= { lldpXdot1dcbxRemETSSBasicConfigurationEntry 1 }

lldpXdot1dcbxRemETSSConTrafficClassesSupported OBJECT-TYPE
SYNTAX      LldpXdot1dcbxSupportedCapacity
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Indicates the number of traffic classes supported."
REFERENCE
    "D.2.9.5"
::= { lldpXdot1dcbxRemETSSBasicConfigurationEntry 2 }

lldpXdot1dcbxRemETSSConWilling OBJECT-TYPE
SYNTAX      TruthValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Indicates if the remote system is willing to accept the
    ETS configuration recommended by the remote system."
REFERENCE
    "D.2.9.3"
::= { lldpXdot1dcbxRemETSSBasicConfigurationEntry 3 }

lldpXdot1dcbxRemETSSConPriorityAssignmentTable OBJECT-TYPE
SYNTAX      SEQUENCE OF
    LldpXdot1dcbxRemETSSConPriorityAssignmentEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per priority. The entry in
    each row indicates the traffic class to which the
    priority is assigned."
::= { lldpXdot1dcbxRemETSSConfigurationTable 2 }

lldpXdot1dcbxRemETSSConPriorityAssignmentEntry OBJECT-TYPE
SYNTAX      LldpXdot1dcbxRemETSSConPriorityAssignmentEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Indicates a priority to traffic class assignment."

```

```

INDEX      {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
            lldpXdot1dcbxRemETSConPriority
        }
 ::= { lldpXdot1dcbxRemETSConPriorityAssignmentTable 1 }

LldpXdot1dcbxRemETSConPriorityAssignmentEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSConPriority      IEEE8021PriorityValue,
    lldpXdot1dcbxRemETSConPriTrafficClass
        LldpXdot1dcbxTrafficClassValue
}

lldpXdot1dcbxRemETSConPriority OBJECT-TYPE
SYNTAX      IEEE8021PriorityValue
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Indicates the priority that is assigned to a traffic
    class."
REFERENCE
    "D.2.9.6"
 ::= { lldpXdot1dcbxRemETSConPriorityAssignmentEntry 1 }

lldpXdot1dcbxRemETSConPriTrafficClass OBJECT-TYPE
SYNTAX      LldpXdot1dcbxTrafficClassValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Indicates the traffic class to which this priority is
    to be assigned."
REFERENCE
    "D.2.9.6"
 ::= { lldpXdot1dcbxRemETSConPriorityAssignmentEntry 2 }

lldpXdot1dcbxRemETSConTrafficClassBandwidthTable OBJECT-TYPE
SYNTAX      SEQUENCE OF
            LldpXdot1dcbxRemETSConTrafficClassBandwidthEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per traffic class. The
    entry in each row indicates the traffic class to
    which the bandwidth is assigned."
 ::= { lldpXdot1dcbxRemETSConfiguration 3 }

lldpXdot1dcbxRemETSConTrafficClassBandwidthEntry OBJECT-TYPE
SYNTAX      LldpXdot1dcbxRemETSConTrafficClassBandwidthEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Indicates a traffic class to Bandwidth assignment."
INDEX      {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
        }

```

```

        lldpXdot1dcbxRemETSConTrafficClass
    }
    ::= { lldpXdot1dcbxRemETSConTrafficClassBandwidthTable 1 }

LldpXdot1dcbxRemETSConTrafficClassBandwidthEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSConTrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxRemETSConTrafficClassBandwidth
        LldpXdot1dcbxTrafficClassBandwidthValue
}

lldpXdot1dcbxRemETSConTrafficClass OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassValue
MAX-ACCESS     not-accessible
STATUS          current
DESCRIPTION
    "Indicates the traffic class to
    which this bandwidth applies"
REFERENCE
    "D.2.9.7"
::= { lldpXdot1dcbxRemETSConTrafficClassBandwidthEntry 1 }

lldpXdot1dcbxRemETSConTrafficClassBandwidth OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassBandwidthValue
MAX-ACCESS     read-only
STATUS          current
DESCRIPTION
    "Indicates the bandwidth assigned to this traffic class."
REFERENCE
    "D.2.9.7"
::= { lldpXdot1dcbxRemETSConTrafficClassBandwidthEntry 2 }

lldpXdot1dcbxRemETSConTrafficSelectionAlgorithmTable OBJECT-TYPE
SYNTAX          SEQUENCE OF
                LldpXdot1dcbxRemETSConTrafficSelectionAlgorithmEntry
MAX-ACCESS     not-accessible
STATUS          current
DESCRIPTION
    "This table contains one row per traffic class. The
    entry in each row indicates the traffic selection
    algorithm to be used by the traffic class."
::= { lldpXdot1dcbxRemETSConfiguration 4 }

lldpXdot1dcbxRemETSConTrafficSelectionAlgorithmEntry OBJECT-TYPE
SYNTAX          LldpXdot1dcbxRemETSConTrafficSelectionAlgorithmEntry
MAX-ACCESS     not-accessible
STATUS          current
DESCRIPTION
    "Indicates a traffic class to traffic selection
    algorithm assignment."
INDEX          {
                lldpV2RemTimeMark,
                lldpV2RemLocalIfIndex,
                lldpV2RemLocalDestMACAddress,
                lldpV2RemIndex,
                lldpXdot1dcbxRemETSConTSATrafficClass
            }
::= { lldpXdot1dcbxRemETSConTrafficSelectionAlgorithmTable 1 }

```