



INTERNATIONAL STANDARD ISO 1522:1998 TECHNICAL CORRIGENDUM 1

Published 1998-11-15

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Paints and varnishes — Pendulum damping test

TECHNICAL CORRIGENDUM 1

Peintures et vernis — Essai d'amortissement du pendule

RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to International Standard ISO 1522:1998 was prepared by Technical Committee ISO/TC 35, *Paints and varnishes*, Subcommittee SC 9, *General test methods for paints and varnishes*.

Page 2

Figure 1


Replace the existing figure by the accompanying figure in which the arrow indicating the length of the cross-bar (2) has been extended to the ends of the cross-bar. In addition, the wording of item 2 in the key has been corrected to indicate that the cross-bar width is $(12 \pm 0,1)$ mm (the length is 150 mm).

Page 3

Figure 2

Replace the existing figure by the accompanying figure in which the 60 mm dimension extends to the bottom of the ball and not to the bar.

Dimensions in millimetres

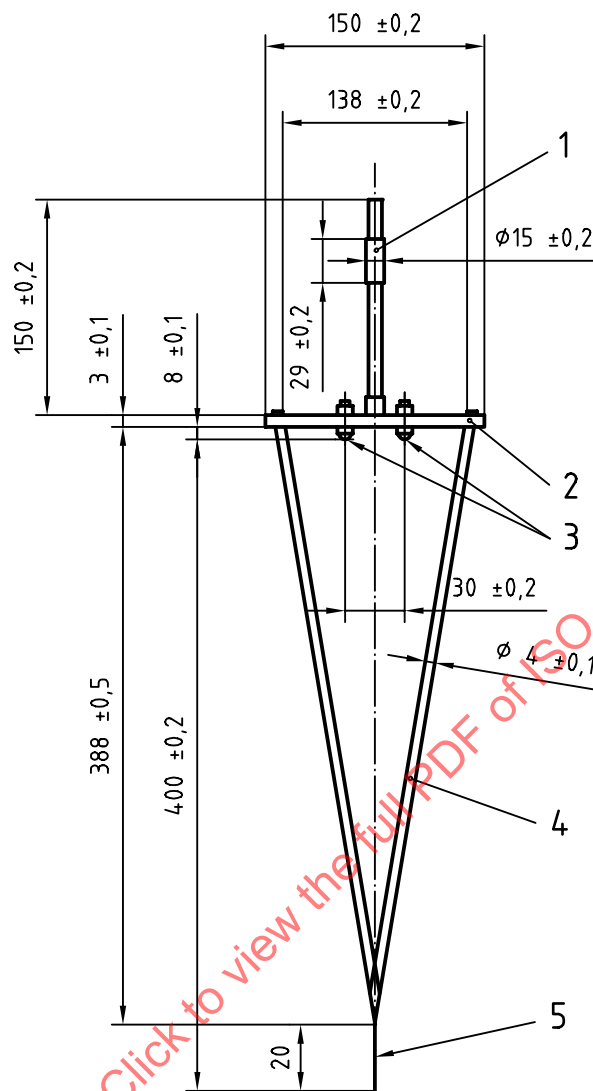

- 1 Counterpoise (adjustable)
- 2 Cross-bar, width $12 \pm 0,1$
- 3 Ball, $\phi 5$
- 4 Frame
- 5 Tip

Figure 1 — König pendulum