
Milling cutters — Interchangeability dimensions for cutter arbors or cutter mandrels

*Fraises à métaux — Dimensions d'interchangeabilité avec les arbres
porte-fraises ou les mandrins porte-fraise*

STANDARDSISO.COM : Click to view the full PDF of ISO 240:2016



STANDARDSISO.COM : Click to view the full PDF of ISO 240:2016



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
1 Scope	1
2 Dimensions	1
2.1 Key drive.....	1
2.2 Tenon drive.....	2
Annex A (informative) Relationship between designations in this International Standard and ISO 13399	4
Bibliography	5

STANDARDSISO.COM : Click to view the full PDF of ISO 240:2016

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 29, *Small tools*, Subcommittee SC 2, *Holding tools, adaptive items and interfaces*.

This third edition cancels and replaces the second edition (ISO 240:1994), of which it constitutes a minor revision with the following changes:

- deleted [Annex A](#) giving the conversion of the metric values into inches;
- added [Annex A](#) giving the relationship between the symbols of this International Standard and the symbols according to the ISO 13399- series.

Milling cutters — Interchangeability dimensions for cutter arbors or cutter mandrels

1 Scope

This International Standard specifies the dimensions for interchangeability between the cutter and the arbor or mandrel, i.e. the diameter of the bore and the arbor or mandrel and elements of the drive, whether by keying or tenon.

It applies to all types of milling cutters mounted on cutter arbors or mandrels.

2 Dimensions

2.1 Key drive

The dimensions of key drive shall be in accordance with the dimensions shown in [Figure 1](#) and given in [Table 1](#).

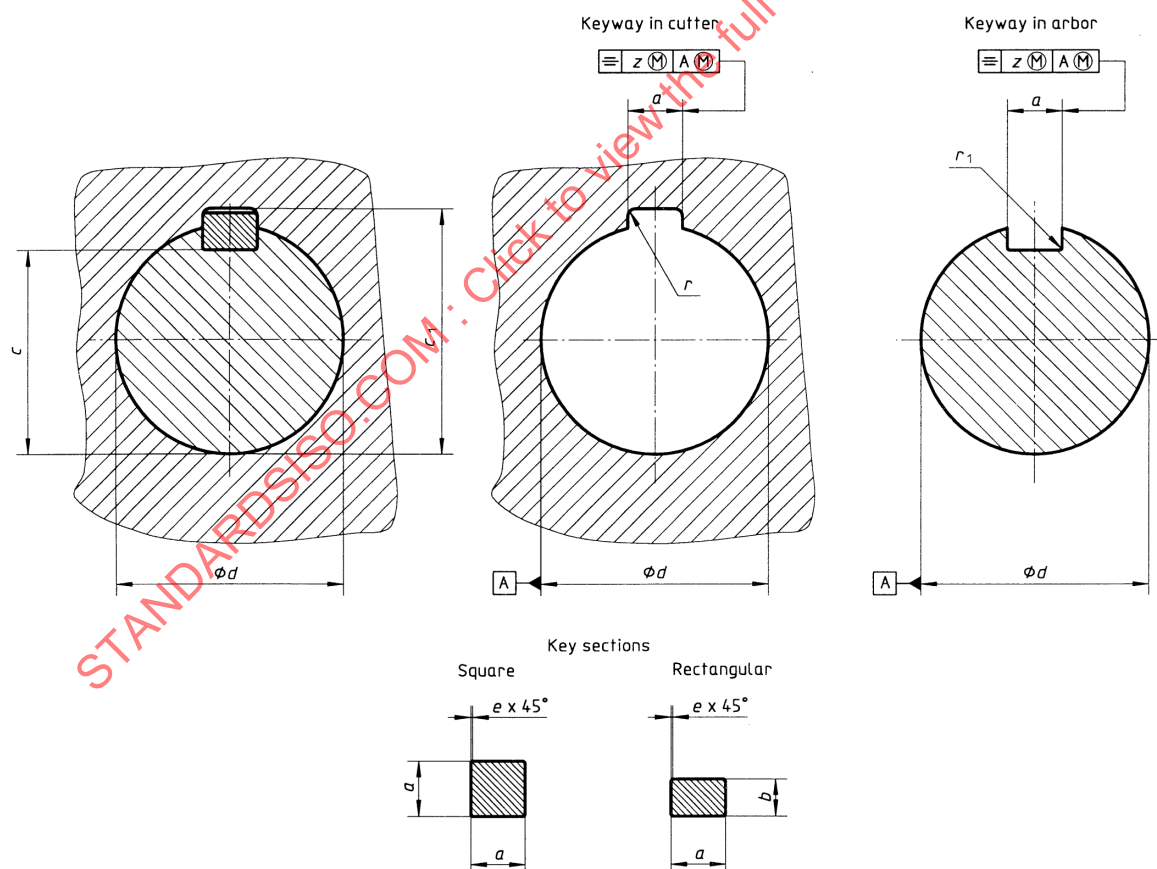


Figure 1 — Dimensions of key drive

Table 1 — Dimensions of key drive

Dimensions in millimetres

d^a	q^a	b h11	c		c_1		e		r		r_1		z		
			nom.	tol.	nom.	tol.	nom.	tol.	nom.	tol.	nom.	tol.			
8	2		6,7	$\begin{smallmatrix} 0 \\ -0,1 \end{smallmatrix}$	8,9	$\begin{smallmatrix} +0,1 \\ 0 \end{smallmatrix}$	0,16	$\begin{smallmatrix} +0,09 \\ 0 \end{smallmatrix}$	0,4	$\begin{smallmatrix} 0 \\ -0,1 \end{smallmatrix}$	0,16	$\begin{smallmatrix} 0 \\ -0,08 \end{smallmatrix}$	0,03		
10	3		8,2		11,5										
13	3		11,2		14,6										
16	4		13,2		17,7		0,25	$\begin{smallmatrix} +0,15 \\ 0 \end{smallmatrix}$	0,6	$\begin{smallmatrix} 0 \\ -0,2 \end{smallmatrix}$	0,25	$\begin{smallmatrix} 0 \\ -0,09 \end{smallmatrix}$	0,035		
19	5		15,6		21,1										
22	6		17,6		24,1										
27	7	7	22	$\begin{smallmatrix} 0 \\ -0,2 \end{smallmatrix}$	29,8	$\begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$	0,25	$\begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$	1,2	$\begin{smallmatrix} 0 \\ -0,3 \end{smallmatrix}$	0,4	$\begin{smallmatrix} 0 \\ -0,15 \end{smallmatrix}$	0,04		
32	8		27		34,8										
40	10		34,5		43,5				0,4				$\begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$	1,6	$\begin{smallmatrix} 0 \\ -0,5 \end{smallmatrix}$
50	12		44,5		53,5										
60	14		54		64,2										
70	16		63,5		75										
80	18		73		85,5										
100	25		14		91			107	0,6		2,5		0,6	$\begin{smallmatrix} 0 \\ -0,2 \end{smallmatrix}$	0,055

a	Tolerances
---	------------

- on d (except for gear hobs):

on the arbor: h6;

on the cutter: H7;

— on a :

for keyway in arbor:

free keying: H9;

close keying: N9;

f or keyway in cutter: C11;

key: h9.

2.2 Tenon drive

The dimensions of tenon drive shall be in accordance with the dimensions shown in [Figure 2](#) and given in [Table 2](#).

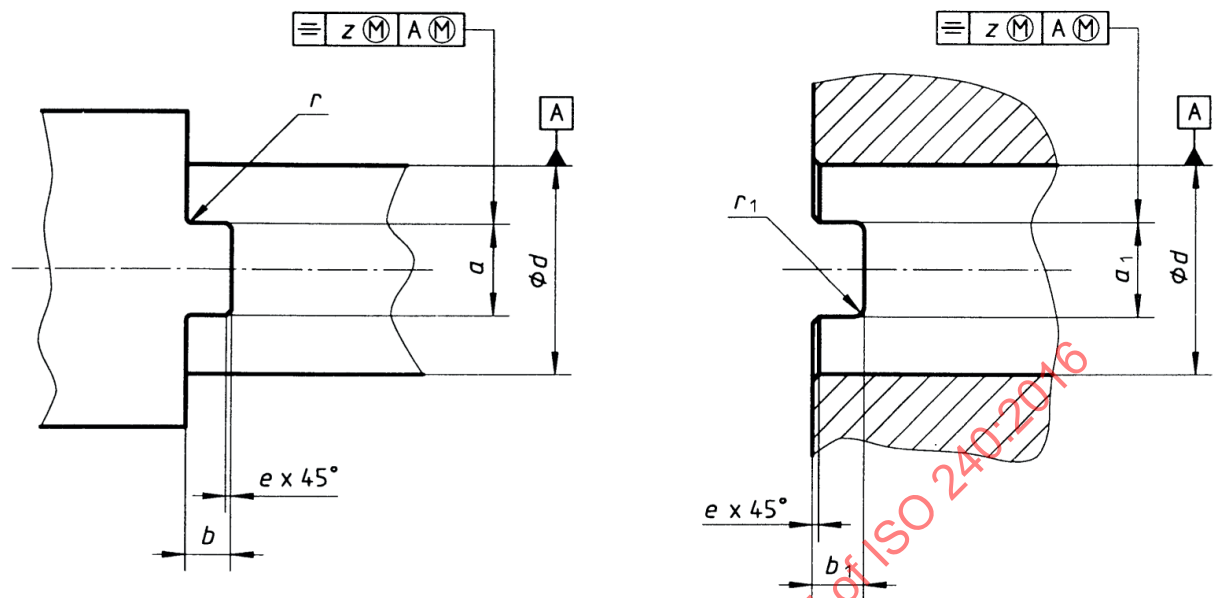


Figure 2 — Dimensions of tenon drive

Table 2 — Dimensions of tenon drive

d^a	Arbor			Cutter			e		z
	a h11	b h11	r max.	a_1 H11	b_1 H13	r_1 max.	nom.	tol.	
5	3	2	0,3	3,3	2,5	0,6	0,3	$+0,1$ 0	0,15
8	5	3,5	0,4	5,4	4		0,4		0,2
10	6	4	0,5	6,4	4,5	0,8	0,5		
13	8	4,5		8,4	5	1	0,6	$+0,2$ 0	
16		5	5,6						
19	10	5,6	10,4	6,3	1,2				
22		6,3		12,4		7	0,8		
27	12	6,3	0,8	12,4	7	1,6	1		
32	14	7		14,4	8				
40	16	8	1	16,4	9	2		0,25	
50	18	9		18,4	10				
60	20	10		20,5	11,2				

^a Tolerances on d (except for gear hobs):
on the arbor: h6;
on the cutter: H7.

Annex A

(informative)

Relationship between designations in this International Standard and ISO 13399

For the relationship between designations in this International Standard and preferred symbols according to ISO 13399, see [Table A.1](#).

Table A.1 — Relationship between designations in this International Standard and ISO 13399

Symbol in ISO 3364	Reference in ISO 3364	Property name in the ISO 13399 series	Symbol in the ISO 13399 series	Reference in the ISO 13399 series
<i>d</i>	Figure 1 Figure 2	Connection diameter	DCON	ISO/TS 13399-4, 71EDDBF5060E6