
**Flight control system for civil small
and light multicopter unmanned
aircraft system (UAS) — General
requirements**

*Système de contrôle de vol pour les multicoptères civils télépilotes
petits et légers — Exigences générales*

STANDARDSISO.COM : Click to view the full PDF of ISO 24355:2023



STANDARDSISO.COM : Click to view the full PDF of ISO 24355:2023



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	1
5 Systems and functions	2
5.1 System composition	2
5.2 Flight control unit	2
5.2.1 Angular velocity control	2
5.2.2 Attitude control	3
5.2.3 Velocity control	3
5.2.4 Position control	3
5.3 Navigation unit	3
5.3.1 General	3
5.3.2 General requirements	3
5.3.3 Optional function	3
5.3.4 Flight management	4
5.4 Flight recorder	5
5.5 Safety and emergency management	5
5.6 Interface	6
5.7 Communication with RPS	6
6 Performance requirements	7
6.1 Performance requirements for FCS manufacturer	7
6.1.1 System accuracy requirements	7
6.1.2 Flight quality requirements	7
6.2 Performance requirements of the navigation system	7
7 Requirements and recommendations of support and maintenance	7
7.1 Firmware upgrade and version management	7
7.2 User configuration and tuning support	8
7.3 User manual	8
8 Identification, packaging, transportation and storage	8
8.1 General	8
8.2 Identification	8
8.3 Packaging	9
8.4 Transportation and storage	9
Bibliography	10

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 16, *Unmanned aircraft systems*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Flight control system for civil small and light multicopter unmanned aircraft system (UAS) — General requirements

1 Scope

This document specifies the composition, functional and performance requirements of flight controls for civil multicopter unmanned aircrafts (UAs) with the maximum take-off mass (MTOM) less than or equal to 25 kg corresponding to unmanned aircraft systems (UAS) at levels I, II, III and IV as graded in ISO 21895 which does not include fully autonomous flights.

The flight control system in this document consists of flight control unit, navigation unit, fault diagnosis and management unit, flight planning, flight recorder, etc. This document is applicable to the design and manufacture of other UA flight control systems or subsystems.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21384-4, *Unmanned aircraft systems — Part 4: Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21384-4 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

attitude control mode

flight control system mode that controls the attitude of the aircraft, but not the position of the aircraft

3.2

hover state

function or mode of keeping the position and height of an aircraft relatively unchanged in position mode without receiving any external control instructions

4 Abbreviated terms

AGL	above ground level
C2	command and control
FCS	flight control system
GNSS	global navigation satellite system
ICAO	International Civil Aviation Organisation

IMU	inertial measurement unit
MTOM	maximum take-off mass
RNP	required navigation performance
RTK	real time kinematic
RPS	remote pilot station
UA	unmanned aircraft
UAS	unmanned aircraft system

5 Systems and functions

5.1 System composition

The FCS of multicopter UAS usually includes aircraft motion control unit, navigation unit, fault diagnosis and management unit, power management unit and flight recorder. The typical information flow of the FCS is described in [Figure 1](#).

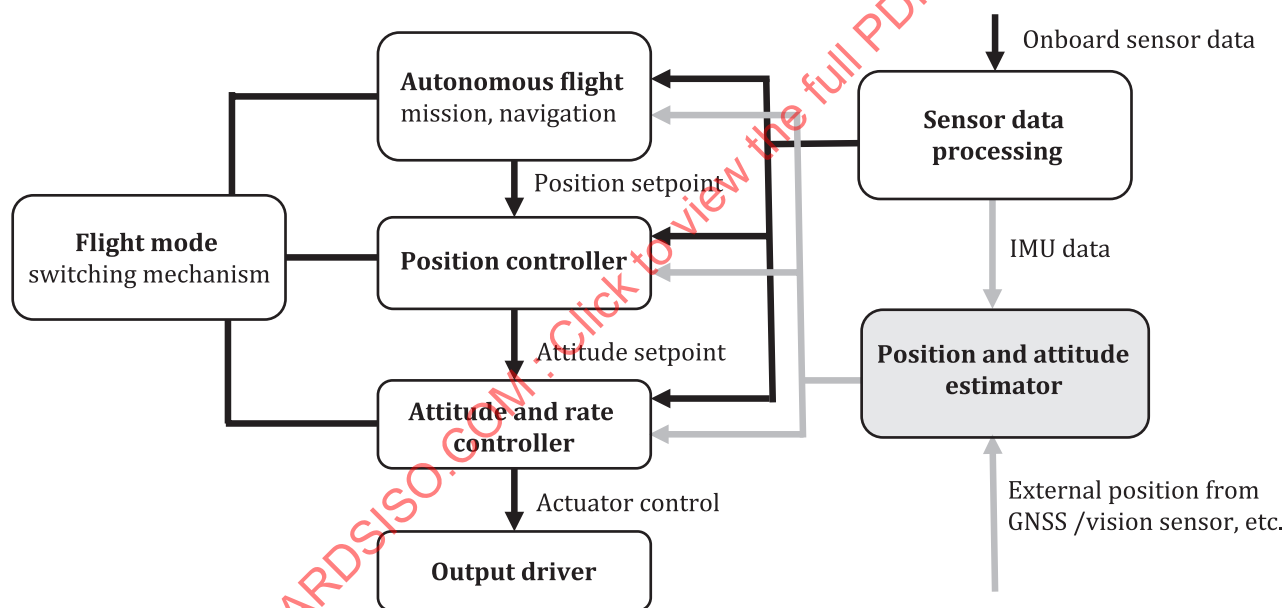


Figure 1 — Typical information flow of the FCS

5.2 Flight control unit

5.2.1 Angular velocity control

The FCS shall have the following angular velocity control functions:

- respond to angular velocity commands in pitch, roll and yaw directions based on navigation information;
- control the UA angular velocity to reach the target angular velocity within the allowable time;
- when the angular velocity control command is zero, the system should maintain current attitude angle unchanged.

NOTE Angular velocity control is also called rate control in many cases.

5.2.2 Attitude control

The FCS shall have the following attitude control functions:

- a) adjust the aircraft attitude to the target value in a certain time according to the attitude angle command;
- b) withstand the unexpected change of aircraft attitude angle caused by external forces during the flight.

5.2.3 Velocity control

When equipped with navigation sensors for velocity measurements/estimation, the FCS shall have the following velocity control functions:

- a) adjust the aircraft velocity to the target value in a certain time according to the velocity command;
- b) withstand the unexpected change of aircraft speed caused by external forces during the flight.

5.2.4 Position control

When equipped with navigation sensors for position measurements/estimation, position control should have the following functions:

- a) control the aircraft to the target position;
- b) keep the position of the aircraft when the position control command remains unchanged.

5.3 Navigation unit

5.3.1 General

This subclause applies to the FCS with navigation capability.

5.3.2 General requirements

The navigation unit shall have the following functions:

- a) calculate all or some of other values such as the longitude and latitude, altitude, acceleration, ground speed, vertical speed, heading, pitch, roll and other navigation information of UA;
- b) sensor calibration;
- c) diagnose sensor faults;
- d) provide angular rate, orientation and acceleration information, such as IMU information;
- e) provide continuous altitude information, such as barometric altitude information;
- f) provide positioning information, such as GNSS information.

5.3.3 Optional function

The navigation unit should have the following functions:

- a) provide AGL information, such as ultrasonic AGL information;
- b) provide relative positioning information;

- c) interfacing with geo-fencing information;
- d) monitor environmental information such as temperature, air pressure and magnetic field;
- e) estimate the accuracy of navigation information (e.g. in the form of covariance);
- f) alignment or calibration function to improve the performance of the sensor;
- g) manage critical sensor redundancy;
- h) receive position of other aircraft;
- i) flight-path deviation warning from pre-programmed flight-path for automatic or semiautomatic mode;
- j) receive key information during the departure phase from the vertiport infrastructure.

NOTE Information exchanges between the UA and the vertiport are standardised in ISO 5491.

5.3.4 Flight management

5.3.4.1 General requirements

Flight management shall have the following functions:

- a) manual control mode, semi-automatic and automatic control switching;
- b) identify whether the UAS is on the ground or in the air;
- c) provide the remaining endurance time or distance in real-time;
- d) fault detection of components;
- e) protective measures such as flight envelope limits and flying altitude limitations;
- f) provide effective control and maintain smooth flight process.

5.3.4.2 Take-off management

UAS take-off phase management should have the following functions:

- a) detect the status of safety-related modules such as sensors, energy sources and power units and the flight restriction area before take-off, and send warnings and prevent the take-off;
- b) the take-off point position, home point position and altitude information should be recorded when the position information is known;
- d) monitor the key environmental information of take-off point (such as temperature, altitude, geomagnetic interference) and take protective measures in case of poor environment.

5.3.4.3 Navigation management

UA navigation management should have the following functions:

- a) when automatically planning a flight mission, the constraints of energy, flight environment, flight capability and other factors should be considered.
- b) for systems with a UTM interface, support the UAS remote pilot to plan the flight as a sequence of way points defined in 2, 3 or 4 dimensions, considering the intended mission as well as constraints of energy, ground and airspace environment, flight capability and other factors;

NOTE 1 The fleet manager of the UAS remote pilot can use the operational plan preparation (OPP) service in ISO 23629-12.

- c) provide effective control and guide the unmanned aircraft through subsequent waypoints along the pre-planned flight path.

NOTE 2 Waypoints can be defined in two (i.e. latitude and longitude), three (plus geodetic or barometric altitude) or four (plus desired time to reach the waypoint) dimensions.

NOTE 3 The RNP in the horizontal and vertical plane is not standardised in this document.

5.3.4.4 Landing management

The following are the required and recommended functions for UAS landing phase management:

- a) when the remaining energy level is enough only for safety landing, the landing mode shall be immediately switched on;
- b) when altitude level is less than critical value, the descent speed shall be reduced to prevent hitting the ground;
- c) during landing, the position of UA should have the function to be manually adjusted to select the appropriate landing point;
- d) safe landing speed should be configurable to prevent landing damage;
- e) when the vertiport is include in the landing process, the FCS can receive key information during the arrival phase from the vertiport infrastructure;

NOTE Information exchanges between the UA and the vertiport are standardised in ISO 5491.

- f) when the UA has limited landing space, landing accuracy shall be met for safety landing;
- g) the landing operation shall have the capability to be stopped manually.

5.4 Flight recorder

The FCS shall be able to record the following information at the specific frequency determined by the manufacturer:

- a) navigation data;
- b) flight control mode;
- c) remote control information;
- d) flight status information;
- e) system fault information;
- f) system warning information;
- g) other required information.

5.5 Safety and emergency management

This subclause is applicable to FCS with navigation capability. When the UA encounters an emergency, to increase safety and reduce damage, the FCS should support the following functions:

- a) lost link protection: when the C2 link is lost and the UA is unreachable by any communication method, the FCS should take the specified action under this situation; it should, for example, continue the mission, stop the mission, land, return to home; these actions should be software configurable;

- b) emergency flight termination and/or emergency recovery: FCS shall support flight termination or recovery procedure in an emergency;
- c) low battery protection: when the remaining battery is lower than the specified minimum value, the FCS should take action specified by the user or manufacturer; for example, send a warning to the remote pilot, return home or land;
- d) the FCS should support the motor arm and disarm function; when the motors are in the disarmed state, they are prevented from starting by the FCS;
- e) when the UA encounters GNSS failure, the FCS shall reduce the automatic control level and switch to attitude control mode or manual control mode and send warning to remote pilot with sound, light and RPS warning message, etc.;
- f) the FCS shall have a maximum attitude angle limitation function to ensure the safe operation of the UA;
- g) the tuning of the control parameters should consider enough gain margin to handle uncertainties and dynamic model changes due to condition variation;
- h) the communication protocol of the FCS shall have methods such as package sequence number, to prevent out of order and duplicate reception of commands into the communication interface;
- i) the FCS shall have the function to track and display communication errors;
- j) in the case of temperature controlled IMU, if the temperature control is unable to control the temperature, the FCS shall send information to the remote pilot to indicate a reduced navigation performance;
- k) the FCS shall be designed to prevent uncommanded motor start on the ground;
- l) the FCS shall be designed to prevent uncommanded full throttle during the flight and send warning to the remote pilot when that happens during the flight;
- m) the FCS should detect the propulsion system failure and send warning information to take action and maintain the attitude and height if possible; when the lift is not sufficient to maintain the height, the FCS shall maintain the attitude when reducing the height to minimize the loss;
- n) the FCS shall have the function to manage failures or malfunctions, and generate warnings, alarms or failure messages.

5.6 Interface

The FCS manufacturer shall provide the following information in the user manual:

- a) type and quantity of interfaces;
- b) equipment supported by the interface;
- c) relevant electrical characteristics, mechanical characteristics, interface identification and interface communication;
- d) function and performance description;
- e) connectors and wires.

5.7 Communication with RPS

When equipped with a ground control station, the FCS shall support the following functions:

- a) change the flight state;

- b) display the flight information;
- c) upload and download waypoint;
- d) display fault and warning information.

6 Performance requirements

6.1 Performance requirements for FCS manufacturer

6.1.1 System accuracy requirements

The FCS manufacturer should provide the following control performance specification under the hover state, take-off and landing state, and the stable auto flight state:

- a) position control accuracies;
- b) velocity control accuracies;
- c) attitude control accuracies.

NOTE Flight conditions are specified with a specific test platform, altitude and wind condition defined by the manufacturer. The error refers to flight technical error (FTE) defined in the ICAO Document 9613.

6.1.2 Flight quality requirements

- a) Transient response in all axes during transition between different flight conditions and flight modes shall be smooth and convergent.
- b) Controllability and manoeuvrability in all control modes shall be guaranteed.

6.2 Performance requirements of the navigation system

The preparation time of a GNSS receiver includes power on and initial positioning time of GNSS. Unless otherwise specified, the preparation time of a GNSS receiver should be no more than one minute and that of an RTK receiver should be no more than two minutes.

The manufacturer shall list the performance specification for the following items:

- a) GNSS receiver readiness time;
- b) navigation system readiness time;
- c) position error of the system;
- d) velocity error;
- e) attitude error.

7 Requirements and recommendations of support and maintenance

7.1 Firmware upgrade and version management

When the FCS has firmware upgrade functions, it should meet the following recommendations:

- a) each individual firmware package should have a unique version number;
- b) when a firmware/firmware package is upgraded or changed, the version number should also be changed accordingly;

- c) manufacturers of flight control systems should establish relatively complete firmware validation, verification and release procedures to ensure that pre-release firmware has been fully validated in order to reduce issues affecting the flight safety.

7.2 User configuration and tuning support

In order to meet the system debugging and installation requirements of different user groups and situations, flight control system should support at least the following parameters or functions:

- a) sensitivity of pitch, roll, yaw and power/thrust setting;
- b) emergency protection actions such as link loss protections and low battery protection;
- c) return home function (return to home point);
- d) limitation of flight altitude, speed and distance.

7.3 User manual

Manufacturers of FCS shall provide users with a series of paper or electronic user manuals and meet the design requirements and user requirements.

The user's manual should include at least the following information:

- a) inventory list;
- b) disclaimer;
- c) system composition;
- d) system function and performance;
- e) flight control and operational guidelines.
- f) flight limitations;
- g) supported external equipment with instructions;
- h) pre-flight inspection list;
- i) requirements for product storage, transportation and maintenance;
- j) flight conditions and environmental requirements.

8 Identification, packaging, transportation and storage

8.1 General

If the FCS product is shipped separately, the requirements in this clause apply; otherwise, the requirements in this clause do not apply.

8.2 Identification

The product should be marked with at least the following information:

- a) product name and model number;
- b) power supply voltage rating;
- c) product serial number;