
**Cranes — Information to be provided
for enquiries, orders, offers and
supply —**

**Part 3:
Tower cranes**

*Appareils de levage à charge suspendue — Informations à fournir
pour la recherche, la commande, la soumission et la fourniture —*

Partie 3: Grues à tour



STANDARDSISO.COM : Click to view the full PDF of ISO 9374-3:2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Information to be provided by the purchaser with enquiry or order	1
5 Information to be provided by the manufacturer	1
5.1 Information to be provided when offering a tower crane	1
5.2 Information to be provided when supplying a tower crane	2
Annex A (informative) Information to be provided by the purchaser with enquiry or order	15
Annex B (informative) Information to be provided by the manufacturer when offering tower crane(s)	17
Bibliography	19

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information.

The committee responsible for this document is ISO/TC 96, *Cranes*, Subcommittee SC 7, *Tower cranes*.

This second edition cancels and replaces the first edition (ISO 9374-3:2002), which has been technically revised.

ISO 9374 consists of the following parts, under the general title *Cranes — Information to be provided for enquiries, orders, offers and supply*:

- Part 1: General
- Part 3: Tower cranes
- Part 4: Jib cranes
- Part 5: Overhead travelling cranes and portal bridge cranes

Cranes — Information to be provided for enquiries, orders, offers and supply —

Part 3: Tower cranes

1 Scope

This part of ISO 9374 gives guidance for information to be provided:

- a) by the purchaser when enquiring for a tower crane,
- b) by the purchaser when ordering a tower crane,
- c) by a manufacturer when offering (tendering) for a tower crane,
- d) by the manufacturer when supplying a tower crane.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4306-3:2003 (including Amd.1:2011), *Cranes — Vocabulary — Part 3: Tower cranes*

ISO 7363:1986, *Cranes and lifting appliances — Technical characteristics and acceptance documents*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4306-3:2003 and ISO 4306-3:2003/Amd.1:2011 apply.

4 Information to be provided by the purchaser with enquiry or order

The purchaser shall provide the necessary data to enable the crane manufacturer/supplier to supply a tower crane equipped to meet the purchaser's specifications. A typical list of data is given in [Annex A](#).

[Figures 1](#) and [3](#) illustrate the dimensions to be supplied, as applicable, by the purchaser.

NOTE The format of the data presented in [Annex A](#) is shown as an example only.

5 Information to be provided by the manufacturer

5.1 Information to be provided when offering a tower crane

The manufacturer/supplier shall provide the information, as applicable, listed in [Annex B](#).

NOTE The format of the data presented in [Annex B](#) is shown as an example only.

5.2 Information to be provided when supplying a tower crane

5.2.1 Technical information

5.2.1.1 Site preparation and crane support design data

Data to be used by the crane support designers should be provided, as listed below.

- a) Vertical and horizontal forces and torsional and overturning moments applicable to the crane configuration(s) furnished. This data should indicate whether governing forces are due to in-service or out-of-service winds, and the applicable speed and direction of wind. For travelling cranes the data can be stated in terms of wheel or bogie loads.
- b) Maximum wind speed for which the travelling crane possesses adequate resistance to sliding, as determined by calculation, in the configuration(s) provided, and precautions that shall be taken at higher wind speeds than in-service speed.
- c) Rail track installation requirements.
- d) Anchorage arrangements for cranes to be installed on stationary (fixed) bases.
- e) Ballast requirements, as applicable.

5.2.1.2 Erection instructions

Data to be used by crane erection personnel should be provided, such as the following:

- a) mass and dimensions of components and sub-assemblies;
- b) recommended lifting attachment points, when applicable;
- c) centre of gravity location for non-uniform components and sub-assemblies, if handled in normal sequence of erection/dismantling;
- d) method and recommended sequence of assembly — where applicable, warnings should be given to alert erection personnel when member strength or stability requires a particular method or sequence of erection;
- e) details of critical component connections, including diagrams where necessary, describing and identifying:
 - 1) bolts, pins and other parts needed,
 - 2) the method of assembling the joint,
 - 3) the torque or tension to be applied to prestressed bolts,
 - 4) the point in time during the erection process for applying final torque or tension,
 - 5) the means for retaining components such as pins.

5.2.1.3 Installation, testing and use

The manufacturer shall provide technical information such as listed in [Annex B](#) and test certificates for the crane to facilitate its erection, testing and use in accordance with ISO 7363 and as appropriate for the appliance.

5.2.1.4 Operating instructions, limitations and precautions

Information, data and recommendations should be provided for the use of the crane operator and supervisory personnel, which, in the judgement of the manufacturer, would foster operation of the crane within the requirements of the design and would reduce the possibility of mishap or damage.

5.2.1.5 Maintenance requirements and recommendations

This information should include identification of those members or locations it is advisable to periodically observe or test by non-destructive means for the purpose of detecting the onset of metal fatigue, the loosening of prestressed bolts, or wear affecting the ability of the crane to support rated loads.


5.2.1.6 Design characteristics affecting competent use of the crane

In addition to the information called for in [5.2.1.2](#), data such as those listed below should be provided:

- a) location, proper settings and adjustments, and functioning of limiting and indicating devices;
- b) location and required settings of hydraulic or pneumatic pressure-relief valves and locations of points where circuit pressures can be checked;
- c) the manufacturer's recommendations for frequency of inspection as a function of the severity of service.

5.2.2 Dimensions


The manufacturer shall provide dimensional data appropriate to the configuration(s) of the crane furnished, such as those dimensions shown in [Figures 2, 4, 5, 6 and 7](#).

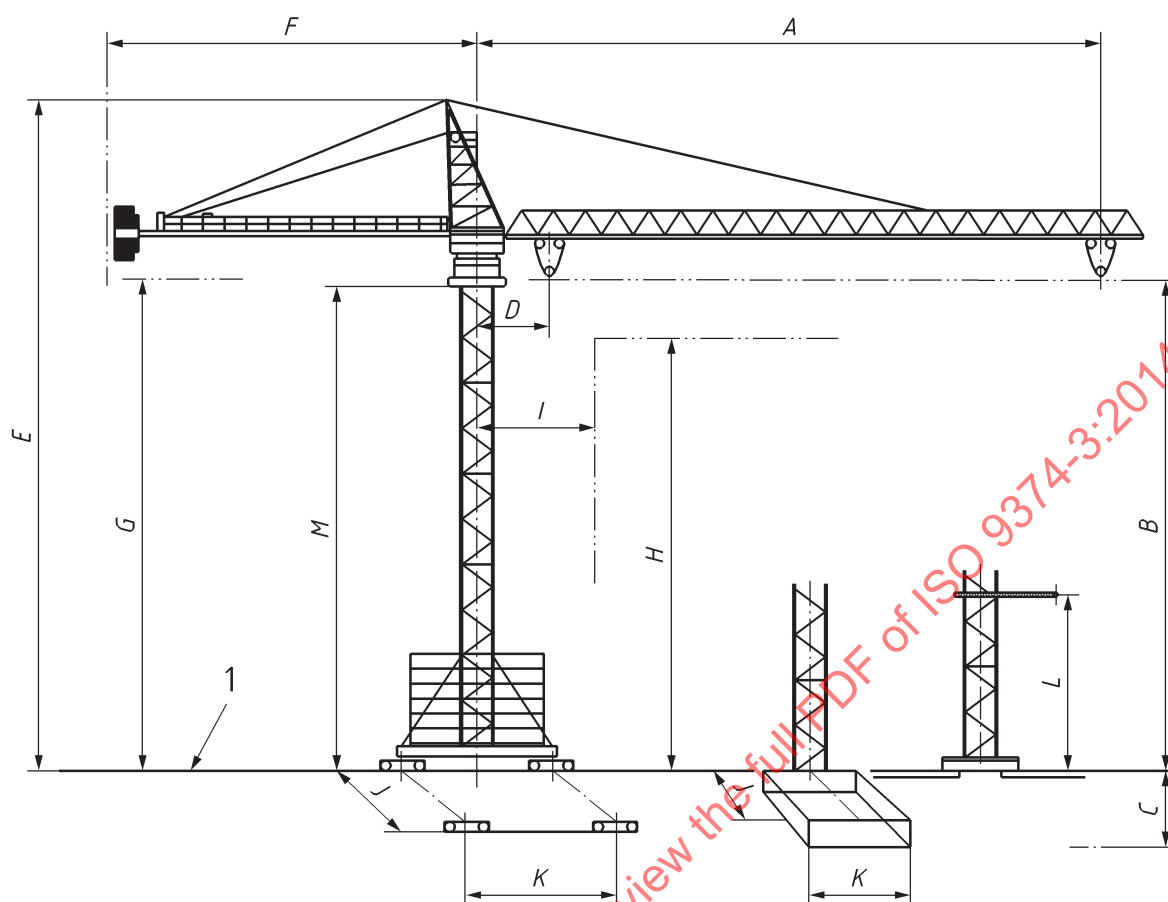

Key

1	datum	G	clearance under tail swing
A	maximum radius	H	maximum height of the obstruction
B	maximum hook height above the datum	I	minimum distance to the obstruction
C	maximum hook movement below the datum	J	track rail gauge, or foundation width
D	minimum radius	K	track rail wheelbase, or foundation length
E	maximum height to the top of the cat head	L	maximum free-standing height of tower
F	tail radius	M	distance to the first tie


Figure 1 — Tower cranes erected by element — Examples of dimensions to be provided by the purchaser, as applicable

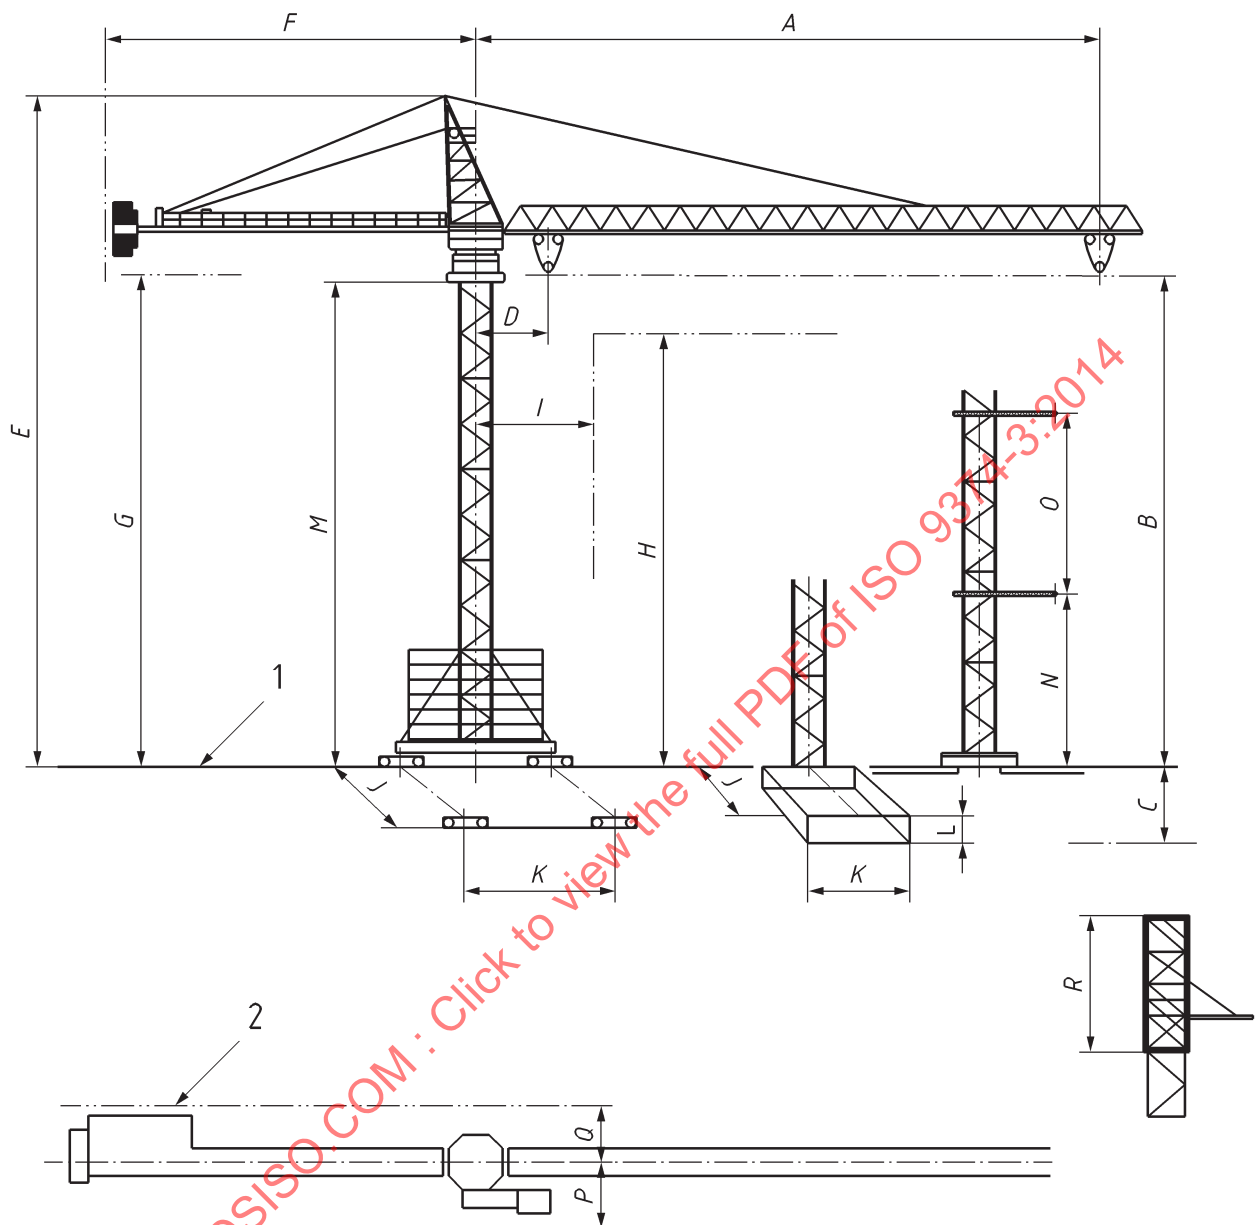

Key

1	datum	I	minimum distance to the obstruction
2	building line	J	track rail gauge, or foundation width
A	maximum radius	K	track rail wheelbase, or foundation length
B	maximum hook height above the datum	L	depth of foundation
C	maximum hook movement below the datum	M	maximum free-standing height of tower
D	minimum radius	N	distance to the first tie
E	maximum height to the top of the cat head	O	distance between the ties
F	tail radius	P	minimum clearance, cab side
G	clearance under tail swing	Q	minimum clearance, other side
H	maximum height of the obstruction	R	height of climbing frame

Figure 2 — Tower cranes erected by element — Examples of dimensions to be provided by the manufacturer, as applicable

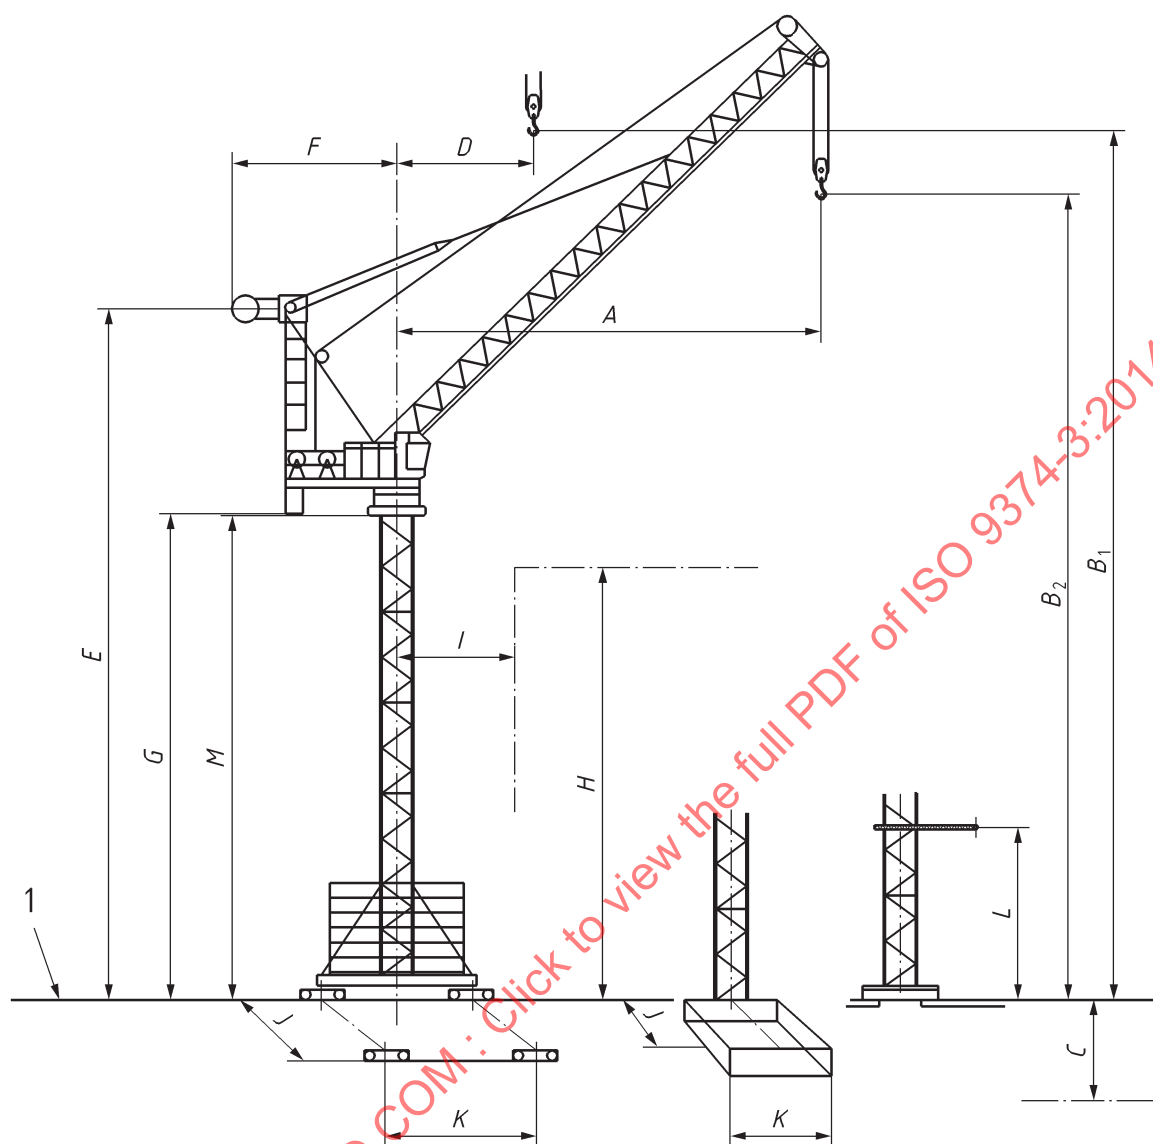

Key

1	datum	G	clearance under tail swing
A	maximum radius	H	maximum height of the obstruction
B ₁	maximum hook height above the datum	I	minimum distance to the obstruction
B ₂	maximum hook height above the datum	J	track rail gauge, or foundation width
C	maximum hook height below the datum	K	track rail wheelbase, or foundation length
D	minimum radius	L	distance to the first tie
E	maximum height to the top of the cat head	M	maximum free-standing height of tower
F	tail radius		

Figure 3 — Tower cranes with luffing jib — Examples of dimensions to be provided by the purchaser, as applicable

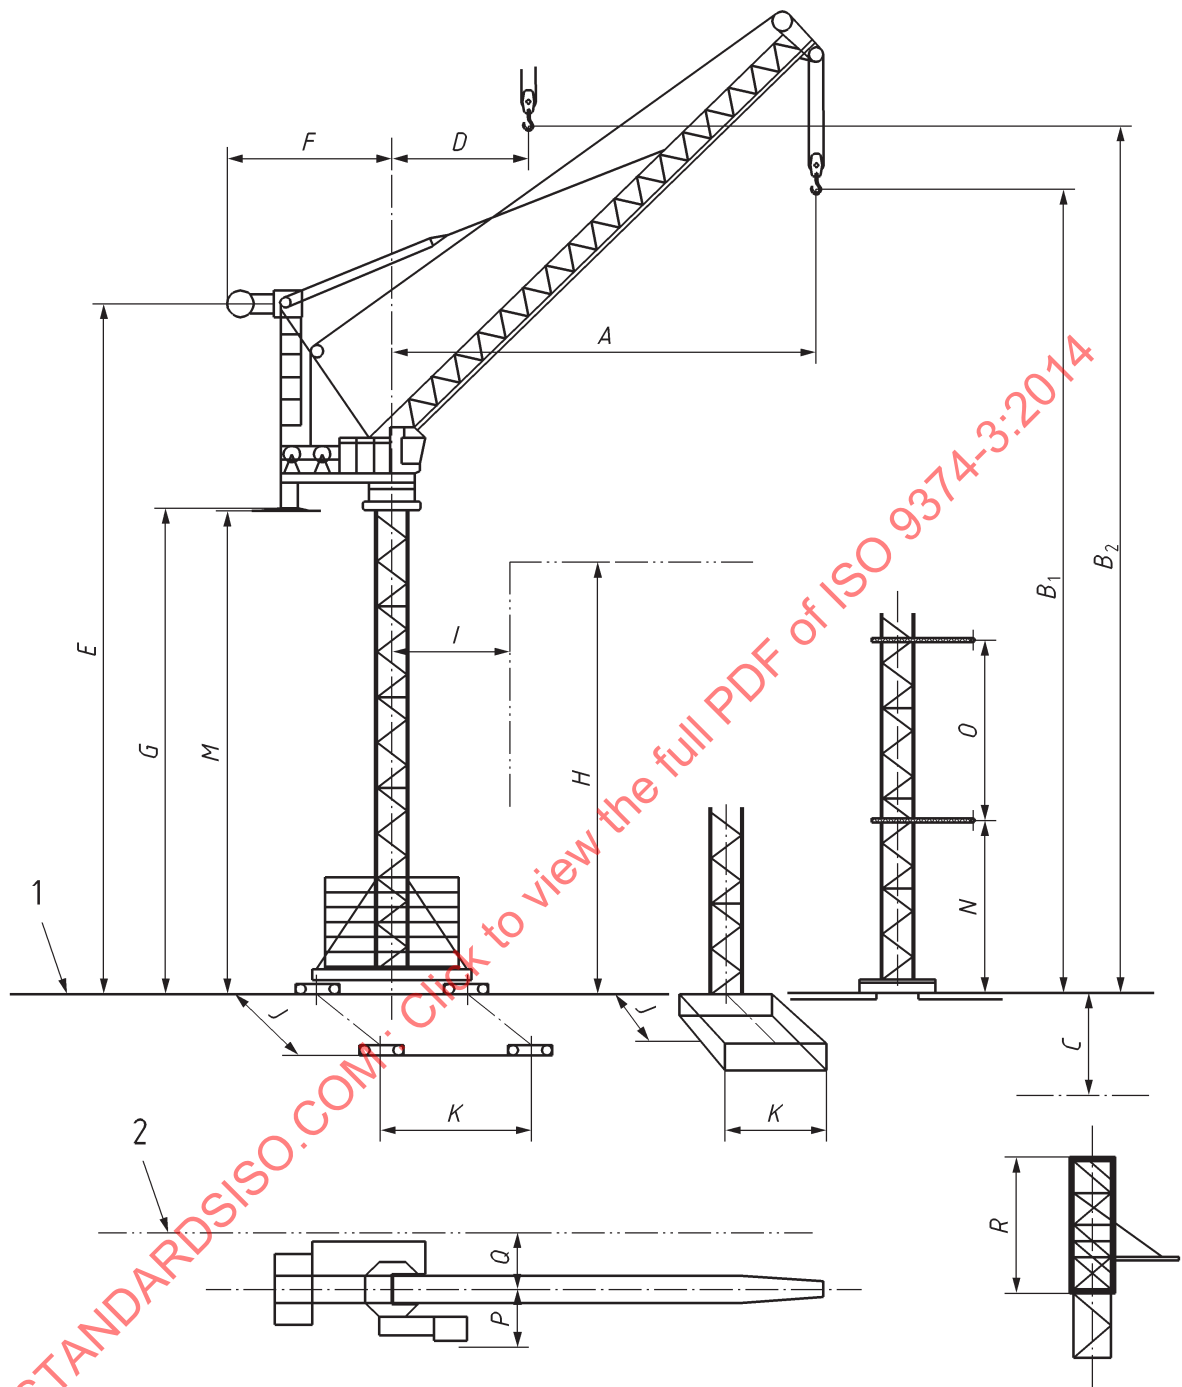



Table (example only)

Number of tower sections	Hook heights m	
	B_1	B_2
1	3,90	10,00
2	8,43	14,52
3	12,93	15,98

Key

1	datum	I	minimum distance to the obstruction
2	building line	J	track rail gauge, or foundation width
A	maximum radius	K	track rail wheelbase, or foundation length
B_1	maximum hook height above the datum	L	depth of foundation
B_2	maximum hook height above the datum	M	maximum free-standing height
C	maximum hook movement below the datum	N	distance to the first tie
D	minimum radius	O	distance between the ties
E	maximum height to the top of the cat head	P	minimum clearance, cab side
F	tail radius	Q	minimum clearance, other side
G	clearance under tail swing	R	height of climbing frame
H	maximum height of the obstruction		


Figure 4 — Tower cranes with luffing jib — Examples of dimensions to be provided by the manufacturer, as applicable

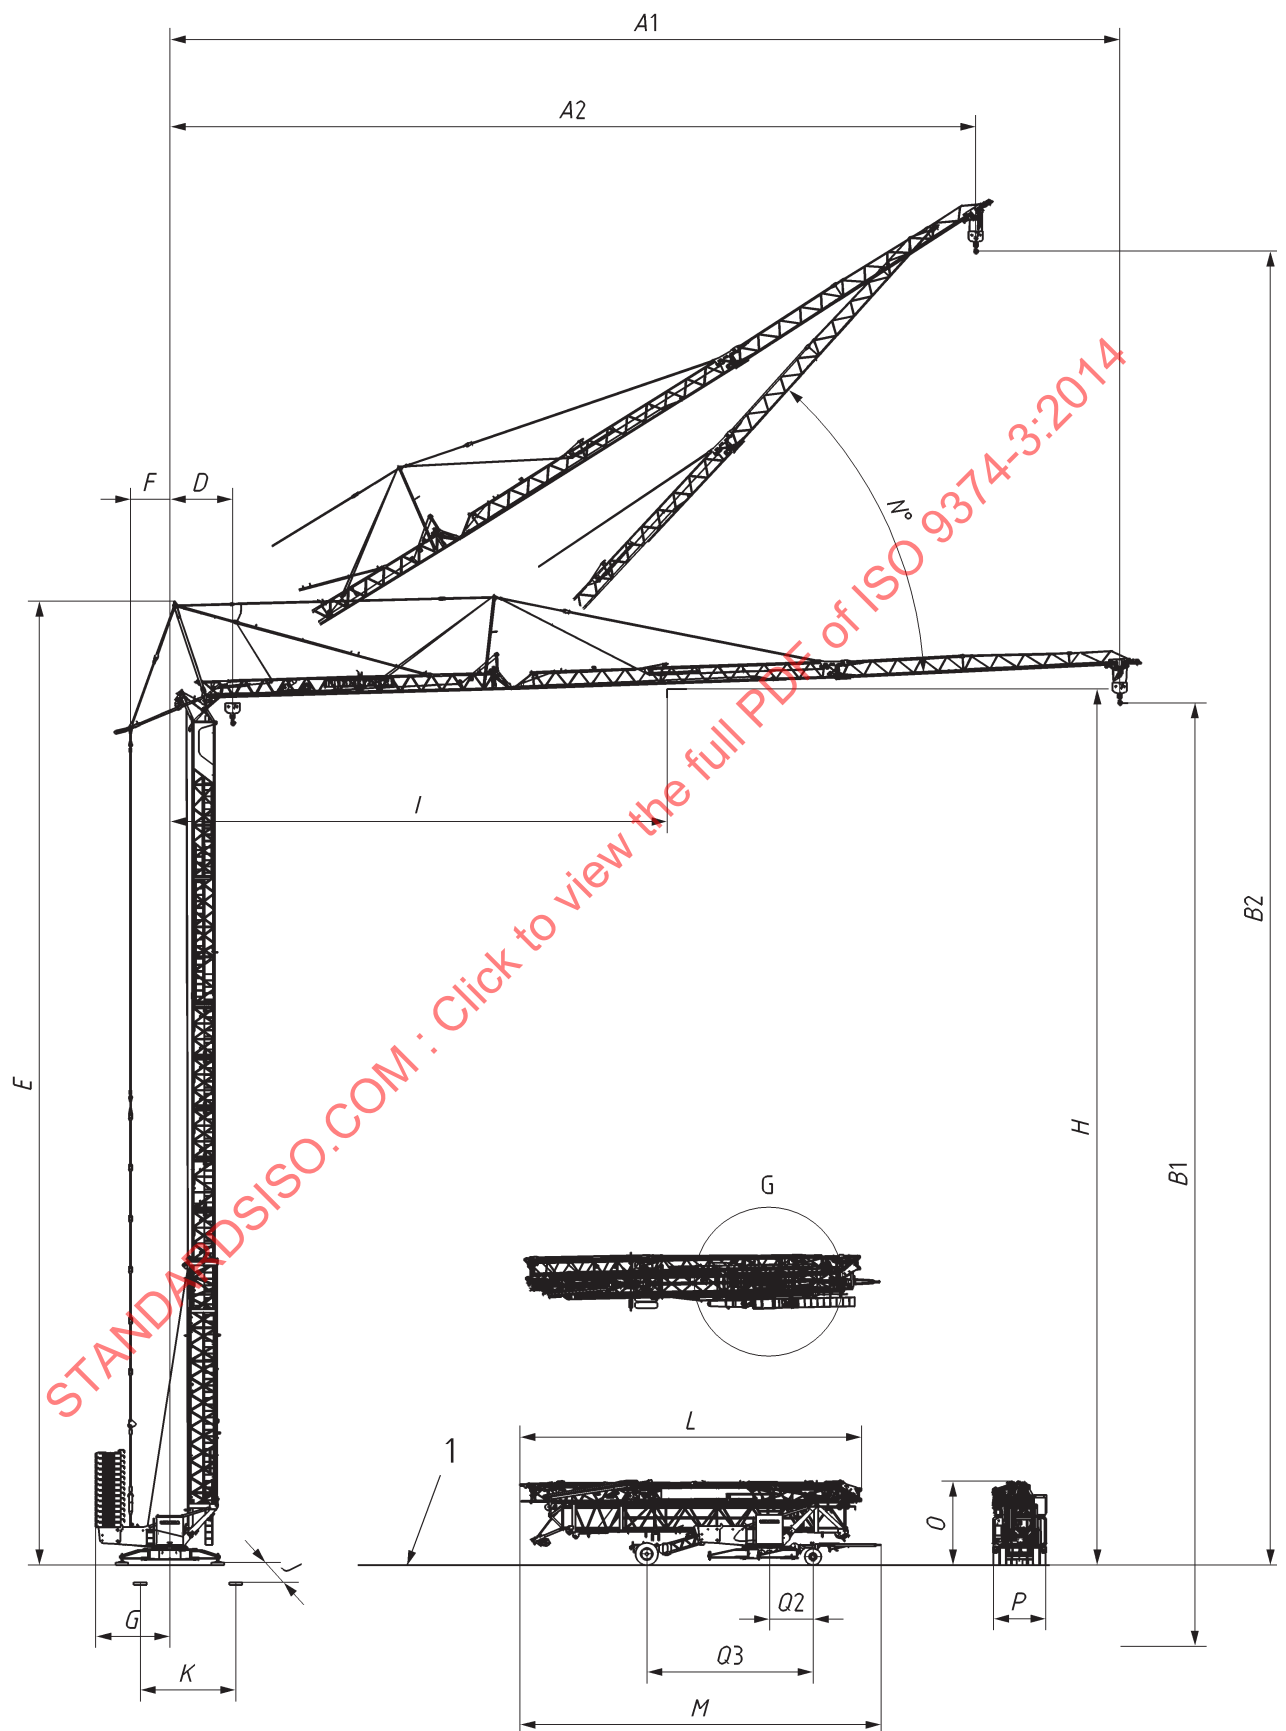

Key

1	datum	<i>J</i>	outrigger width
<i>A</i> ₁	maximum radius	<i>K</i>	outrigger length
<i>A</i> ₂	maximum radius	<i>L</i>	total length of the crane in transport position without axles
<i>B</i> ₁	maximum hook height above the datum	<i>M</i>	total length of the crane in transport position
<i>B</i> ₂	maximum hook height above the datum	<i>N</i>	jib positions
<i>C</i>	maximum hook movement below the datum	<i>O</i>	height of the crane in transport position
<i>D</i>	minimum radius	<i>P</i>	width of the crane in transport position
<i>E</i>	maximum height to the top of the cat head	<i>Q</i> ₁	distance between axles
<i>F</i>	tail radius	<i>Q</i> ₂	distance between front axle and slewing axis
<i>G</i>	turning radius of the slewing platform	nA	number of axles
<i>H</i>	maximum height of the obstruction	mA	axle load
<i>I</i>	minimum distance to the obstruction	m	total weight


Figure 5 — Self-erecting tower cranes — Examples of dimensions to be provided by the manufacturer, or the purchaser as applicable

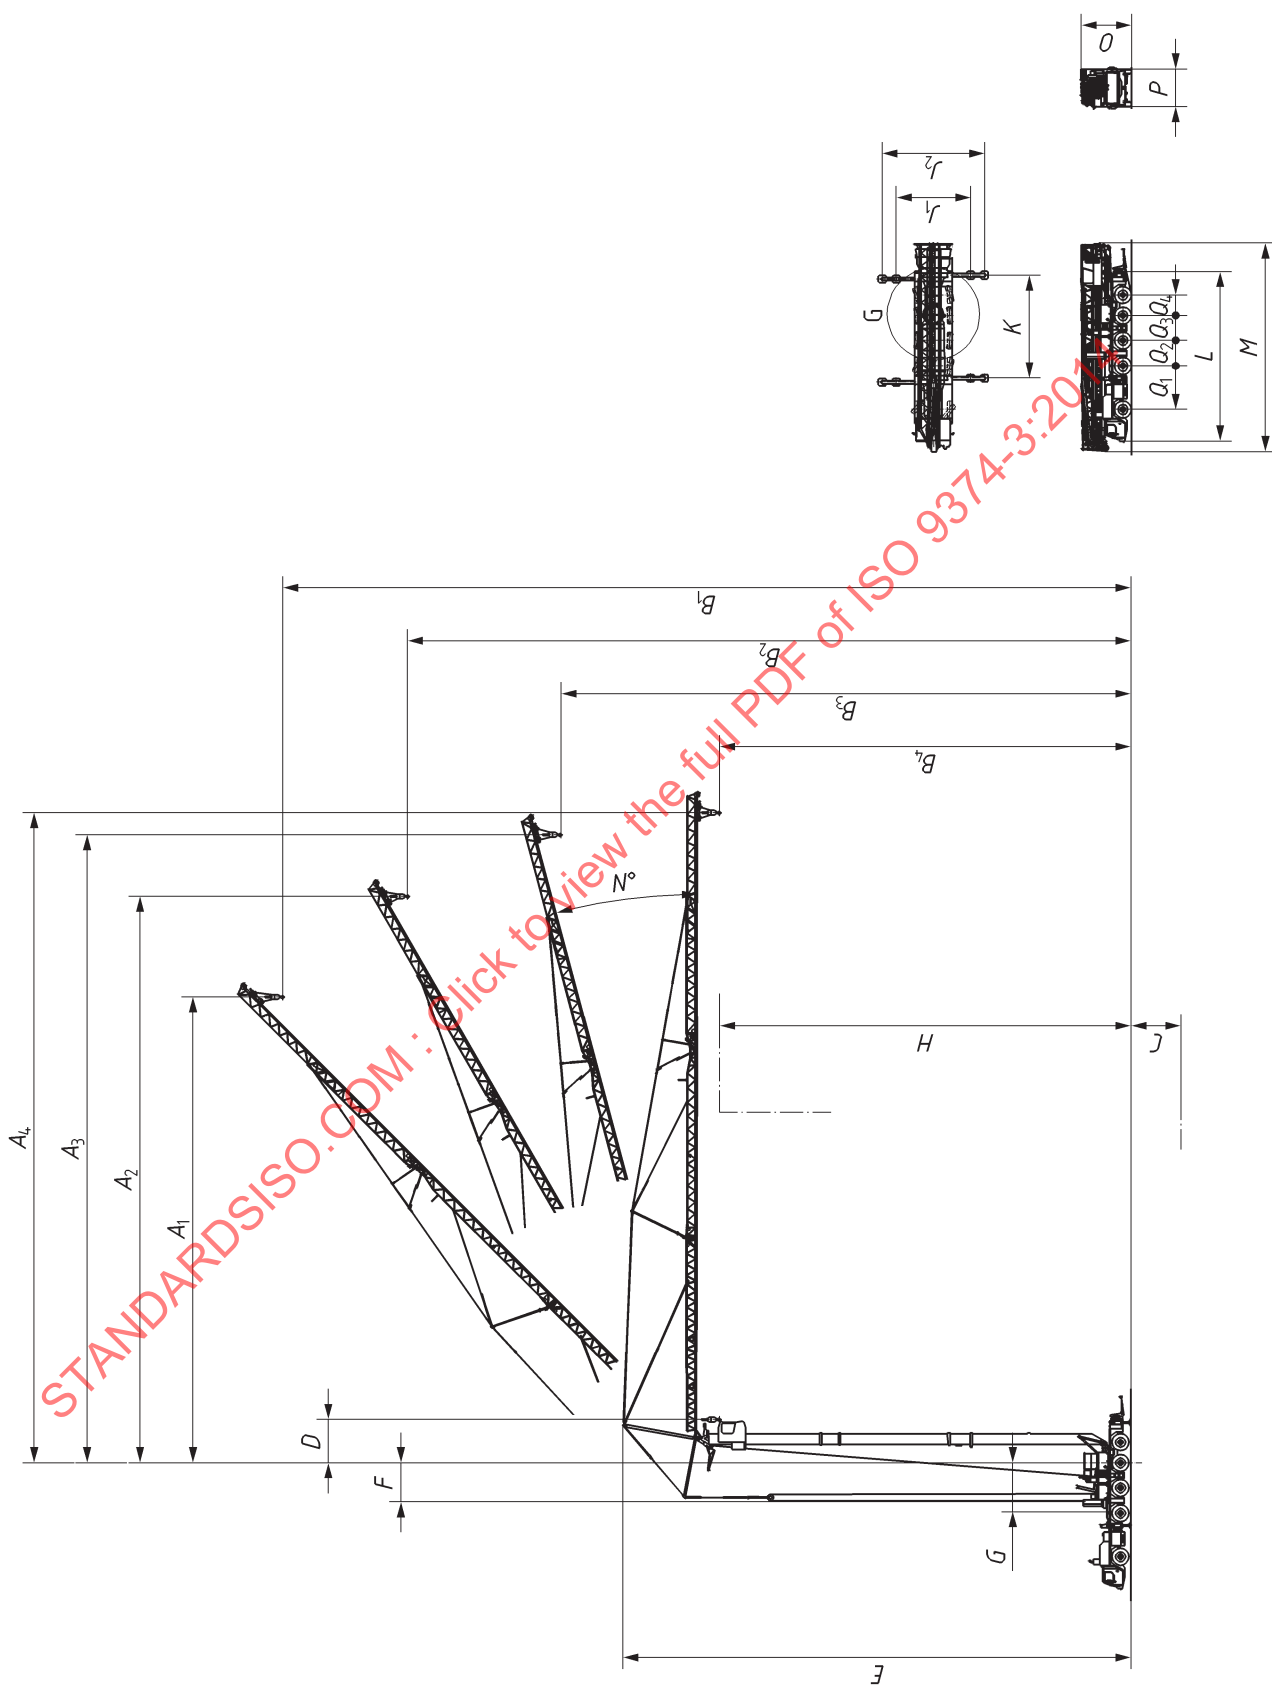

Key

1	datum	J_1	outrigger width
A_1	maximum radius	J_2	outrigger width
A_2	maximum radius	K	outrigger length
A_3	maximum radius	L	total length of the crane in transport position without axles
A_4	maximum radius	M	total length of the crane in transport position
B_1	maximum hook height above the datum	N	jib positions
B_2	maximum hook height above the datum	O	height of the crane in transport position
B_3	maximum hook height above the datum	P	width of the crane in transport position
B_4	maximum hook height above the datum	Q_1	distance between axles
C	maximum hook movement below the datum	Q_2	distance between axles
D	minimum radius	Q_3	distance between axles
E	maximum height to the top of the cat head	Q_4	distance between axles
F	tail radius	nA	number of axles
G	turning radius of the slewing platform	mA	axle load
H	maximum height of the obstruction	m	total weight
I	minimum distance to the obstruction		

Figure 6 — Mobile self-erecting tower cranes — Examples of dimensions to be provided by the manufacturer or by the purchaser as applicable

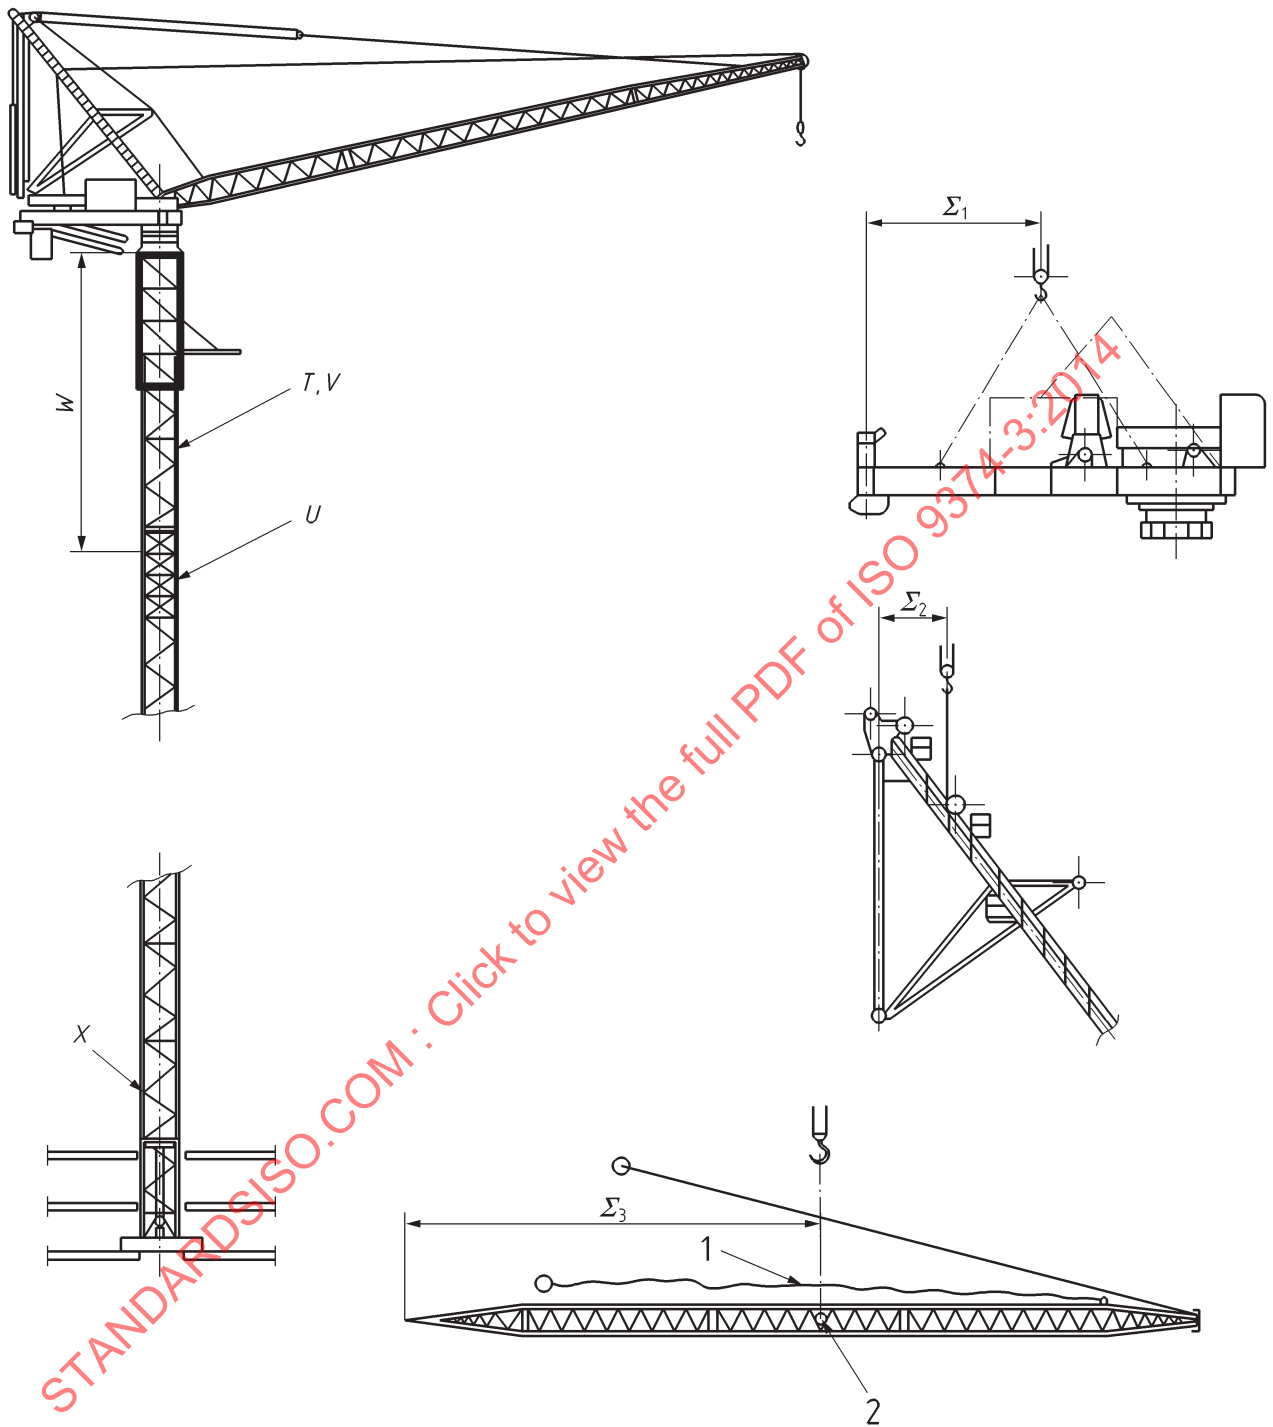

Key

- 1 erection pendants
- 2 centre of gravity
- T number of tower sections (standard)
- U number of reinforced tower sections
- V overall dimensions of a tower section - and mass
- W maximum projection above the top tie
- X data on internal climbing section - and mass
- Σ examples of schedule of component masses and location of the centres of gravity, for shipping and erection purposes

Figure 7 — Examples of additional data to be provided by the manufacturer, as applicable

STANDARDSISO.COM : Click to view the full PDF of ISO 9374-3:2014

Annex A

(informative)

Information to be provided by the purchaser with enquiry or order

Purchase enquiry or order form ^a	
Name of company.....	
Address.....	
Name of contact person.....	
Telephone number	
Crane to be installed in: (town)..... (country)	
Description of type of crane.....	
Number of cranes required	
Rated lifting capacity (net load)	
a) Main hoist:	
Maximum load and radius at that load:t at.....m	
Maximum outreach and load at that outreach;.....m with.....t	
b) Auxiliary hoist:	
Maximum load and radius at that load:t at.....m	
Maximum outreach/radius at that outreach/radius:.....m with.....t	
Vertical movement of hook required	
“Hammerhead” Type Fig. 1	“Luffing Jib (boom)” Type Fig. 3
a) Main hoist:	
Above datum level: m	at maximum radius.....m
Below datum level: m	at minimum radius.....m
b) Auxiliary hoist:	
Above datum level: m	at maximum radius.....m
Below datum level: m	at minimum radius.....m
Location of operator's position m	
Rail centres (if applicable)..... m	
Description of crane duties:	
Classification to be used for the crane as a whole and for each mechanism as a whole to enable the crane and each mechanism to be matched to the duty for which it is required (either in accordance with ISO 4301-1 and ISO 4301-3, or as agreed between the manufacturer and the purchaser.)	
Type of load: Material to be handled:	
Type of hook or lifting device:	
General state of atmosphere or climate (to include, for example, wind speed, rainfall and pollution):.....	
In-service wind speed: m/s	
Air temperature conditions	
a) ambient:..... °C	
b) maximum:..... °C	
c) minimum:..... °C	
^a The format of the order form presented in this annex is given as an example only.	