

---

---

**Information technology — Document  
processing and related communication —  
User interface to telephone-based  
services — Voice messaging applications**

*Technologies de l'information — Traitement de documents et  
communication connexe — Interface de l'utilisateur et des services à  
base de téléphone — Applications de messagerie vocale*

## Contents

|                                                              | Page |
|--------------------------------------------------------------|------|
| <b>1</b> Scope                                               | 1    |
| <b>2</b> Conformance                                         | 4    |
| <b>3</b> Normative references                                | 5    |
| <b>4</b> Definitions                                         | 6    |
| <b>5</b> Standard elements of user/system dialogue           | 9    |
| <b>5.1</b> Voice input                                       | 9    |
| <b>5.2</b> DTMF input                                        | 10   |
| <b>5.3</b> System output                                     | 11   |
| <b>5.4</b> Time-outs                                         | 13   |
| <b>5.5</b> System response times                             | 14   |
| <b>5.6</b> Basic use of the # and * keys                     | 15   |
| <b>5.7</b> Language of system prompts                        | 17   |
| <b>6</b> Call answering                                      | 19   |
| <b>7</b> Voice mail application                              | 24   |
| <b>8</b> Voice bulletin boards                               | 35   |
| <b>9</b> Voice message delivery                              | 44   |
| <b>Annex A</b> (informative)                                 |      |
| Dialogue design guidelines                                   | 49   |
| <b>Annex B</b> (informative)                                 |      |
| Use of this standard for services other than voice messaging | 60   |

## List of figures

|                                                                                           |    |
|-------------------------------------------------------------------------------------------|----|
| Figure 1 - Taxonomy of telephone-based services                                           | 2  |
| Figure 2 - The user/system model of this International Standard                           | 3  |
| Figure 3 - Control menu key allocations                                                   | 16 |
| Figure 4 - Sample call flow for call answering                                            | 19 |
| Figure 5 - Key allocations before the record tone during call answering                   | 21 |
| Figure 6 - Key allocations after the record tone during call answering                    | 23 |
| Figure 7 - Typical flow for mailbox access                                                | 25 |
| Figure 8 - Main menu key allocations                                                      | 26 |
| Figure 9 - A typical flow for listening to messages                                       | 28 |
| Figure 10 - Listen menu key allocations                                                   | 30 |
| Figure 11 - Send menu key allocations                                                     | 32 |
| Figure 12 - Key allocations after the record tone during message recording                | 33 |
| Figure 13 - Typical flow for access to bulletin boards                                    | 36 |
| Figure 14 - Bulletin board main menu key allocations                                      | 38 |
| Figure 15 - Typical flow for listening to voice bulletin board messages                   | 39 |
| Figure 16 - Bulletin board listen menu key allocations                                    | 41 |
| Figure 17 - Key allocations after the record tone during bulletin board message recording | 42 |
| Figure 18 - Key allocations after leaving a recorded message in a bulletin board          | 43 |
| Figure 19 - Key allocation for post-recording menu commands                               | 45 |
| Figure 20 - Key allocations after the record tone during message recording                | 47 |
| Figure 21 - Key allocations for playback menu commands                                    | 48 |

## List of tables

|                                                                                        |    |
|----------------------------------------------------------------------------------------|----|
| Table 1 - Results of user input at the control menu                                    | 16 |
| Table 2 - Results of user input before the record tone during call answering           | 21 |
| Table 3 - Results of user input after the record tone during call answering            | 22 |
| Table 4 - Results of user input at the main menu                                       | 26 |
| Table 5 - Results of user input at the listen menu                                     | 29 |
| Table 6 - Results of user input at the send menu                                       | 32 |
| Table 7 - Results of user input after the record tone during message recording         | 33 |
| Table 8 - Functions accessible from the bulletin board main menu                       | 37 |
| Table 9 - Results of user input at the bulletin board listen menu                      | 40 |
| Table 10 - Results of user input after the record tone during bulletin board recording | 42 |
| Table 11 - Results of user input after leaving a recorded message in a bulletin board  | 43 |
| Table 12 - Results of user input at the post-recording menu                            | 45 |
| Table 13 - Results of user input after the record tone during message recording        | 46 |
| Table 14 - Results of user input at the playback menu                                  | 48 |
| Table A.1 - Different terms used for the # key                                         | 50 |
| Table A.2 - Different terms used for the * key                                         | 50 |
| Table A.3 - Suggested time-out durations for different contexts                        | 56 |
| Table B.1 - Standard listen/playback functions                                         | 60 |

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 13714 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 18, *Document processing and related communication*.

Annexes A and B of this International Standard are for information only.



## Introduction

Voice messaging systems allow telephone users to leave recorded messages for people who are unable to answer their telephone, either because they are absent or busy, or because they are currently engaged on another telephone call. This is commonly referred to as call answering. Voice messaging systems can also allow users to send voice messages directly, without accessing call answering.

Voice messaging systems are increasingly available and accessed from homes and offices, as well as from public and mobile telephones. With callers leaving messages on many different systems and subscribers increasingly likely to have mailboxes on more than one system, there is a need for users to have a common interface for the basic features of voice messaging systems.

Experience has shown that consistent and predictable human interfaces benefit users. Benefits can include faster learning, greater productivity, and greater satisfaction. Consistent human interfaces can also benefit an industry by promoting greater acceptance for products and services.

The DTMF interface provides a highly restricted user interface, as there are only 12 different keys available for input, and output is via an audio channel, whose performance is constrained by speed and users' limited short-term memory capabilities. For these reasons, users are particularly likely to benefit from common user interface features both within and across different voice messaging systems they encounter, as they can learn a common set of input and output protocols, which will maximise the efficiency and usability of these interfaces.

This International Standard includes only some of the features in DTMF-controlled systems used for voice messaging (see clauses 5, 6, 7, 8, and 9, following) but, as described later in this International Standard (see clause 1 and Figure 1) there exist large areas of commonality with important functions in other telephone-based (i.e., interactive voice response) systems and services. Many of the user interface features specified in this International Standard will be usable for and implemented in other interactive voice response applications. Annex B of this standard summarises the subset of the telephone user interface features described in the body of this standard that are generally applicable in DTMF-controlled telephone-based interfaces beyond voice messaging.

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 13714:1995

# Information technology — Document processing and related communication — User interface to telephone-based services — Voice messaging applications

## 1 Scope

This International Standard will provide users of voice messaging systems with a consistent mode of interaction in a way that is independent of the underlying system implementations. The interface is based on a set of design guidelines annexed to this International Standard.

The interface supports the ability of all users described in the user-system model (see Figure 2) to access the features of voice messaging systems. In a call answering application, the interface allows callers to leave messages from all types of telephones. It also allows callers to access additional features through the use of DTMF devices. In the voice mail application, through the use of DTMF devices, the interface allows subscribers to send and receive voice messages, and to manage stored data, and allows non-subscribers to leave voice messages for subscribers.

This International Standard addresses the following six functional areas:

- a caller leaving a voice message, when the call is answered by a voice messaging system call answering facility;
- a caller leaving a voice message, when a message is sent to a subscriber by a subscriber or non-subscriber through direct messaging;
- a subscriber listening to and processing voice messages received;
- a subscriber creating and sending voice messages through the voice mail application;
- the sending and receiving of messages via voice message delivery applications; and
- the use of voice bulletin boards.

Within these functional areas, only certain features are defined in this International Standard. However, standard-conforming systems are not limited to these functions and features, and this International Standard does not preclude alternative methods of invoking features specified in this International Standard, providing that these alternatives do not conflict with the standard interface specified for other features covered in this International Standard.

In this International Standard, the direct messaging functional area is covered in the clause specifying the call answering application.

In addition, this International Standard specifies two requirements to be satisfied in all voice messaging contexts, not just the application contexts specified earlier in this clause: the use of # as a delimiter (see 5.6.1), and the access to and presence of the control menu (see 5.6.2) and its associated functionality.

This International Standard does not address the user/system interface for administrators, who have responsibility for the management and maintenance of the voice messaging system.

This International Standard also does not address the proactive method, if any, employed by a voice messaging system to notify a user that a voice mailbox contains a message. Notification is, at present, typically achieved by a message waiting light, a distinctive dial-tone, or a pager device.

This International Standard does not specify a non-DTMF user interface for Integrated Services Digital Network (ISDN) terminal access to voice messaging applications; however, if a user's ISDN terminal or switching equipment has the capability for full simulation of DTMF tones after call connection, the user interface specified in this International Standard will operate a conforming voice messaging system.

Figure 1 shows a taxonomy of telephone-based services, with shaded boxes indicating the services within the scope of this International Standard:

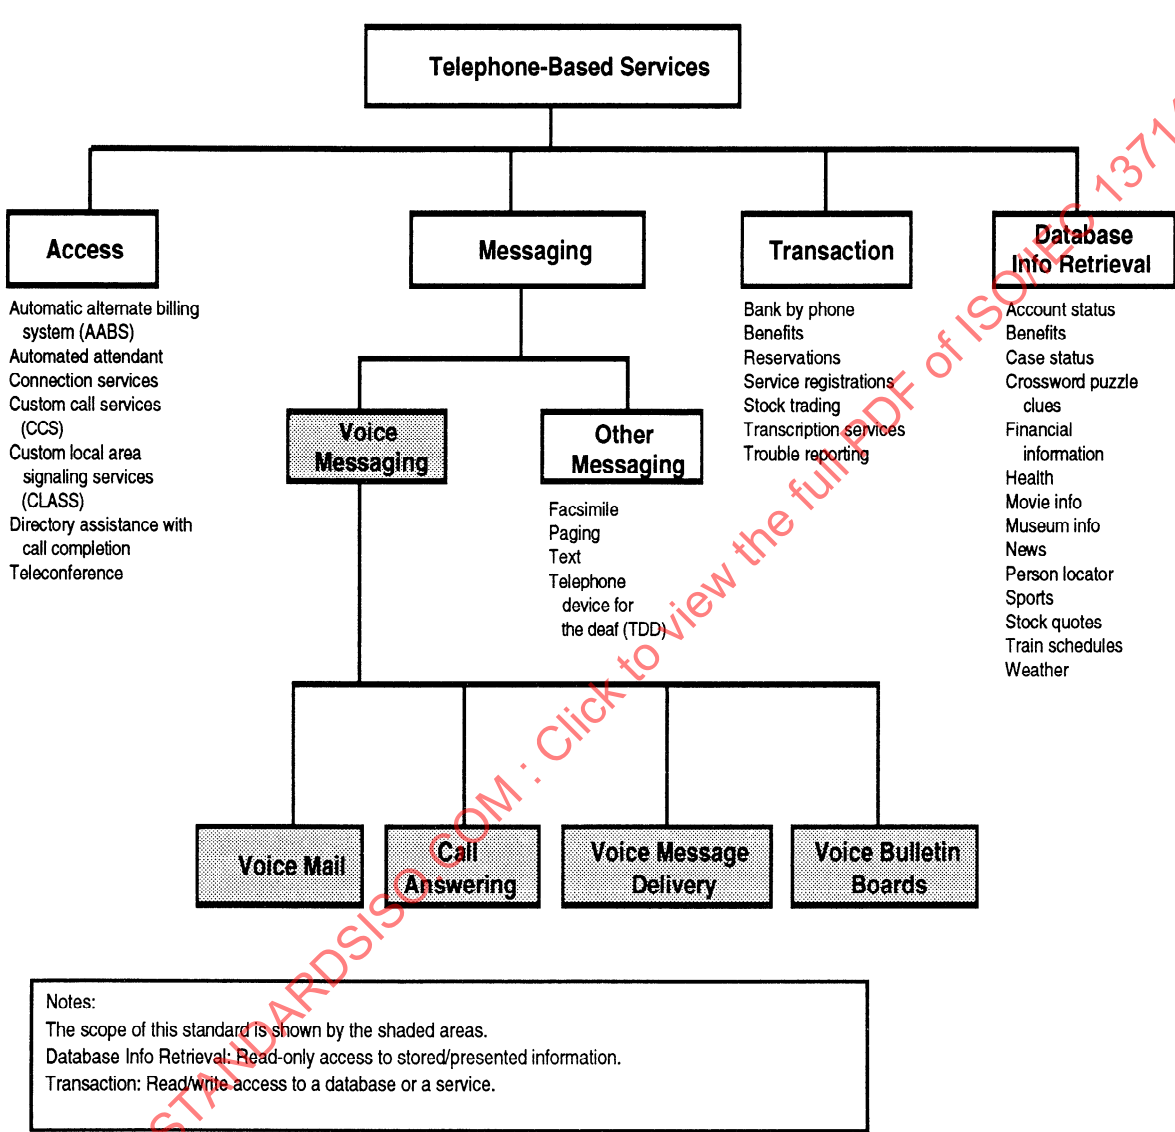


Figure 1- Taxonomy of telephone-based services

Figure 2 shows a user/system model of the scope of this International Standard:

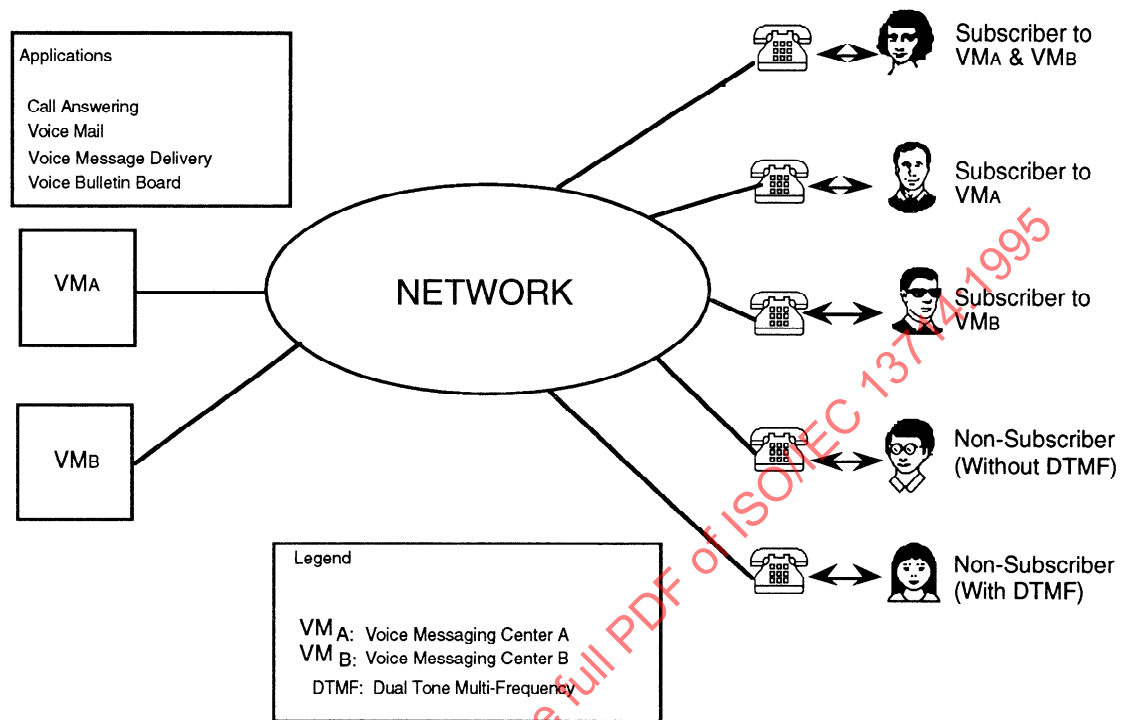


Figure 2 - The user/system model of this International Standard

## 2 Conformance

The user interface to a conforming voice messaging system shall conform to clause 5. Additionally, the user interface to a conforming call answering application shall conform to clause 6; the user interface to a conforming voice mail application shall conform to clause 7; the user interface to a conforming voice bulletin board application shall conform to clause 8; and the user interface to a conforming voice message delivery application shall conform to clause 9. The only requirement for conformance with respect to callers using non-DTMF telephones is as specified in 6.1.

A conforming system may also provide one or more additional, alternative user interfaces which are inconsistent with any or all of clauses 5, 7, 8, and 9, but only to logged-in subscribers who have chosen that alternative interface. The interface specified in this International Standard shall be the default configuration of the system when supplied.

A voice messaging system in which the call answering application conforms to clauses 5 & 6, but in which the other voice messaging applications covered by the scope of this International Standard do not conform may be described as having a conforming call answering application.

Throughout clauses 5, 6, 7, 8, and 9, the following conventions are used to indicate levels of conformance required of compliant systems:

- Mandatory/reserved:** Conforming systems shall have this function/feature and the function/feature shall be accessible in (at least) the way specified.
- Optional/reserved:** Conforming systems may or may not have this function/feature. If the function/feature is offered, it shall be accessible in (at least) the way specified. If the function/feature is not offered the access mechanism specified shall not be used to access any other function/feature.
- Optional/not reserved:** Conforming systems may or may not have this function/feature. If the function/feature is offered in the system state and menu level concerned, it shall be accessible in (at least) the way specified at the menu concerned. If the function/feature is not offered, the access mechanism may be used to access another function/feature.

**Note:** In describing the effect of key-presses in a conforming interface, this International Standard uses a simple declarative mode (e.g. "the play command causes playback....."). The normative content of the standard is carried by the specification of "mandatory/reserved", "optional/reserved" and "optional/not reserved" in the associated table. Where the effect of user input is not specified, a conforming system may assign any effect to that user input, including an effect which is also available through a standard-specified means. For example, the help function as specified in this document on the control menu could additionally be presented as an option in other menus within that application.

### 3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

CCITT Volume VI: *General recommendations on telephone switching and signaling, Recommendation Q.23: Technical features of push-button telephone sets* (1988).

ITU-T: *The telephone network and ISDN operation, numbering, routing and mobile service, Recommendation E.161: Arrangement of digits, letters and symbols on telephones and other devices that can be used for gaining access to a telephone network* (1993).

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 13714:1995

## 4 Definitions

For the purpose of this International Standard the following definitions apply:

**4.1 administration:** *Voice messaging system* functions concerned with the establishment and management of *voice mailboxes* on a system-wide basis, the configuration of the system, and the definition of system-wide and initial default individual parameters.

**4.2 administrator:** A person charged with the *administration* of a *voice messaging system*.

**4.3 call answering:** That segment of a *voice messaging system* concerned with accepting incoming calls and allowing the *caller* to leave a *message* in a *voice mailbox*.

**4.4 caller:** A *voice messaging system* user who accesses the *system* and is provided with a capability to send, leave, or record *voice messages*. A caller need not be a *subscriber*. Callers may enter the system either through the *call answering* facility or by direct connection to the voice mail application.

**4.5 cancel:** Clear the current (i.e. not yet *delimited*) *DTMF* or *voice input*. Typically, the *system* will indicate the cancellation and reprompt for continuing.

**4.6 control menu:** A menu of control functions accessible from any state in the system. This menu is presented when the user presses the \* key in any context other than the control menu itself.

**4.7 data entry:** Numeric *DTMF* input that the *system* does not interpret as commands.

**4.8 delimit:** Indicate or cause completion of an input.

**4.9 dial-ahead:** The ability to enter *DTMF* input before the *system* has requested it. It is commonly used for rapid entry of data or a series of *menu* choices. In dial-ahead, a user enters a *key-press* or *key-presses* in advance of the associated *prompt(s)* and the output of these further *prompt(s)* associated with the input *key-press(es)* is suppressed.

Note: this term may also be referred to as key-ahead, or type-ahead.

**4.10 dial-through:** The interruption of *system* output with *DTMF* input acted on just as if it had been entered at the end of *system* output.

Note: this term may also be referred to as key-through or cut-through.

**4.11 direct messaging:** The capability for a voice messaging system to allow a user (either subscriber or non-subscriber) to leave a message for a subscriber without using the call-answering facility or the send facility.

**4.12 DTMF:** Dual tone multi-frequency encoding of *key press* input. The definition of the encoding employed may be found in CCITT Volume VI, Q.23.

**4.13 DTMF device:** A device through which a user can generate (or, in the case of equipment such as digital telephones, duplicate the effect of) the *DTMF* tones associated with the keys 0-9, \* and #. This device is typically a *DTMF*-telephone but may also be a tone generator, a digital telephone used to invoke *DTMF* signals from a telephone switch, or a digital telephone.

**4.14 feedback:** Information supplied by the *system* to indicate that user actions have had their intended effects, or have had unintended effects. Typically, feedback consists of a new *prompt* or



*message* indicating that an action has had its intended effect, but feedback also includes error indications and tones.

**4.15 forced disconnect:** A user request to a *voice messaging system* for the *system* to disconnect from the call.

**4.16 header:** *System* supplied information associated with an individual *message*. This may include date, time, source and status information such as urgency and privacy.

**4.17 help:** Information provided, either automatically or upon request, to inform users of their available prompted and unprompted choices, and of their current place in the *system*.

**4.18 inter-key time-out:** The interval within which two *DTMF* signals must be input to be considered part of a single string.

**4.19 interactive voice response:** A telephone-based system or service where users enter information and make *menu* selections using *DTMF* devices, and receive information via *system prompts*.

**4.20 interruptibility:** Susceptibility of *system* output to *dial-through*.

**4.21 key-press:** The noun associated with the verb *press*.

**4.22 mailbox access:** A procedure required to gain access to the facilities of a *voice messaging system* for *subscribers*. *Mailbox access* typically involves use of a *security code* and of some form of *user identification*, but either or both of these may be available to the *voice messaging system* through other means than user input.

**4.23 main menu:** The *menu* typically presented after a *subscriber* has accessed a *voice messaging system*.

**4.24 mandatory [feature/function]:** A feature/function required by this International Standard.

**4.25 menu:** The presentation to the user of a list of possible actions. A menu typically consists of a set of *prompts* each describing an available function and the user action necessary to invoke that function.

**4.26 message:** Auditory data placed in a *voice mailbox*. Messages may be left by *callers*, *subscribers*, *systems*, or *system administrators*.

**4.27 message originator:** A *voice messaging system* user who sends *messages*. A message originator need not be the speaker of the original voice data.

**4.28 message recipient:** A *voice messaging system* user who receives *messages*.

**4.29 non-reserved [feature/function]:** The key assigned to this standard function in the given state may be used for other function(s) if the standard function is not provided at the given state.

**4.30 non-subscriber:** A user of a *voice messaging system* who is not acting as a *subscriber*.

**4.31 not specified:** Used in user action/effect tables to indicate that the effect of that action in the associated context is not addressed by this International Standard.

**4.32 optional [feature/function]:** A conforming *system* is not required to have this feature/function.

**4.33 press:** The verb used to describe the user action that generates *DTMF* tones.

**4.34 prompt:** Auditory *system* output providing instructions or guidance to the users. Prompts consist of recorded or synthesised voice and/or tones.

**4.35 record tone:** A tone output by a *voice messaging system* when it expects a user to record *voice input*. A record tone is a type of *prompt*.

**4.36 reserved key:** In the given context, available for use only for the purpose specified in this International Standard.

**4.37 security code:** Data that authorises access to a specific *voice mailbox* or user function. May also be known as password, passcode, personal identification number, etc.

**4.38 subscriber:** A *voice messaging system* user who usually has the capability to originate and receive *voice messages* and to manage the stored voice data.

**4.39 system:** A *voice messaging system*. Note: In this International Standard, the word "system" used alone refers to a voice messaging system.

**4.40 time-out:** (1) An interval of no user input that causes the *system* to change state. (2) The state change resulting from such an interval. For example, a time-out during numeric input may be interpreted as end-of-string and cause the *system* to change from numeric input state to command state or some appropriate action state.

**4.41 user-configurable:** Of an option, able to be set by an individual user, or by an *administrator* on his/her behalf.

**4.42 user identification (user ID):** Data that identify a *subscriber* to a *voice messaging system*.

**4.43 voice input:** Auditory input by a user.

**4.44 voice mailbox:** A descriptive term for those functions of a *voice messaging system* that receive and store *voice messages* for a *subscriber*, or for the logical storage itself.

**4.45 voice message:** A *message*.

**4.46 voice messaging system:** An automated system for the recording, storage, and retrieval of *voice messages*.

**4.47 #:** The *DTMF* key or button located at the lower right-hand corner of the standard 12-key pad on a *DTMF telephone*. Common names for this symbol are listed in annex A.2.2. Acceptable graphic representations for this symbol are shown in CCITT Recommendation E.161 (1993).

**4.48 \*:** The *DTMF* key or button located at the lower left-hand corner of the standard 12-key pad on a *DTMF telephone*. Common names for this symbol are listed in annex A.2.3. The acceptable graphic representation for this symbol is shown in CCITT Recommendation E.161 (1993).

## 5 Standard elements of user/system dialogue

Voice messaging functions are invoked and controlled by a dialogue, or series of exchanges, between the system and a user. This International Standard addresses the following three general states of a voice messaging system: voice input by the user, DTMF input by the user, and system output. Depending upon the context, user input to the voice messaging system may be either voice or DTMF tones. For the purposes of this International Standard, voice input generally refers to any auditory input other than DTMF, and all DTMF input is assumed to result from a DTMF device.

The system portions of the dialogue contain voice or other auditory output. Other auditory output controlled by the system, such as music-on-hold, is outside the scope of this International Standard. Auditory feedback that accompanies DTMF input by the user is not considered to be part of the user/system dialogue and is outside the scope of this International Standard. Voice input by the user leaving messages is also outside the scope of this International Standard, except as specified in 5.1. Some command/response sequences employ time-outs. The length and details of these time-outs are specified in 5.4 and in the description of the affected sequences.

The tables in this and subsequent clauses show standard-conforming DTMF input for the functional areas specified in clause 1. This International Standard does not preclude the use of alternative methods of invoking the functions described, as long as the standard methods are also available.

### 5.1 Voice input

**5.1.1** This International Standard does not require voice input to be interpreted by the voice messaging system. However, annex A provides some informative guidelines for using voice input to control the system.

**5.1.2** During all voice input states, DTMF input as specified in this clause shall delimit the recording of ongoing voice input, with the indicated effects. During voice input the # key delimits the input state. The \* key interrupts the input state and takes the user to the control menu (see 5.6.2).

**5.1.3** When a pause is used to delimit the voice input state, the length of the time-out for no action (see 5.4.2.1) should be used as a guideline as to whether the pause should delimit or be ignored.

**5.1.4** During all voice input states, the handling of sound interpreted by the system as invalid DTMF input is outside the scope of this International Standard.

## 5.2 DTMF input

### 5.2.1 General

**5.2.1.1** DTMF input shall be accepted at any time, except as specified in 5.3.2, 5.3.3.4, and 5.3.6.3. Any key press will interrupt system output except as specified in 5.3.3.4 and 5.3.6.3. If the DTMF input is valid in the current system state, the indicated action is taken. If the DTMF input is not valid in the current system state, an appropriate error indication should be output to the user.

**5.2.1.2** In data-entry contexts, a string of DTMF signals that is valid input to the voice messaging system in its current state, but that includes a signal-free period greater than that specified in 5.4.3.1, shall result in an inter-key time-out and shall cause output of an appropriate indication to the user.

**5.2.1.3** If the system receives more key presses than it can treat as valid input in a data entry state, these should be considered as dial-ahead. Effects of DTMF input received during voice input states are specified in 5.1.

**5.2.1.4** The presence and nature of audible key-press feedback to users as they make DTMF input is not considered to be part of the user/system dialogue, and is outside the scope of this International Standard.

### 5.2.2 Dial-through

**5.2.2.1** Dial-through means the interruption of system output with DTMF input acted on just as if it had been entered at the end of system output. Except as specified in 5.3.2 and 5.3.6.3 all system output shall allow dial-through.

**5.2.2.2** When dial-through is enabled, user DTMF input shall terminate the current system output as specified in 5.5.1.

**5.2.2.3** DTMF input that is invalid in a current system context and that causes dial-through shall result in the same error message as would apply if the system output had been completed prior to the input.

### 5.2.3 Dial-ahead

**5.2.3.1** Dial-ahead is the entry of a sequence of key presses providing input to several successive system states. Dial-ahead of valid commands shall be possible in all contexts. Intervening interruptible prompts should be suppressed by dial-ahead.

**5.2.3.2** If an invalid input is included in a dial-ahead buffer, all buffered key presses subsequent to the one causing the error should be discarded (also see 5.3.6.3).

**5.2.3.3** If a dial-ahead sequence includes user input which delimits recording, the system need not consider this delimiter as valid input.

### 5.3 System output

#### 5.3.1 General

System output in a voice messaging system consists of various forms of auditory output provided by the system to facilitate the dialogue. System output may include system prompts, menus, status indications, error indications, help, warnings, confirmations, and other feedback. The exact specification of the content of system output is beyond the scope of this International Standard.

#### 5.3.2 Interruptibility

**5.3.2.1** System output may have an interruptible portion (during which dial-through is enabled) and a non-interruptible portion (during which dial-through is disabled).

**5.3.2.2** Non-interruptible system output should be as brief as practicable and should only be used for information that the user would normally consider urgent or important.

#### 5.3.3 Record tone

**5.3.3.1** When a voice messaging system is ready to accept voice input in any of the call answering, voice mail, voice message delivery, or voice bulletin board applications within the scope of this International Standard, it shall signal the user with a record tone.

**5.3.3.2** This International Standard recommends use of the record tone specified in 5.3.3.3. It is clearly distinguishable from current record tones. Users, primarily callers, will learn that it indicates that the system they are using provides standard access to many features.

If a system uses a record tone different than that specified, it should be easily discriminable from the specified tone.

**5.3.3.3** The record tone is a sequence:

- a 150 ms, 500 Hz sound
- a pause of 75 ms
- a 150 ms, 620 Hz sound

The tones should be of a single frequency (pure sine wave). Frequencies and durations of the components of the sequence should be accurate to  $\pm 2\%$ . The total distortion power (harmonics and noise) of the record-tone sequence should be at least 33 dB less than the tone power.

**5.3.3.4** The system's record tone shall not be interruptible. User input occurring during the record tone, whether voice or DTMF, need not be saved.

### 5.3.4 Other tones

A tone or tone sequence indicating one status or function should be easily discriminable from tones or tone sequences indicating different status or functions. The necessary discrimination may be achieved through differentiation in pitch or rhythmic pattern, but should not depend on length alone.

### 5.3.5 Completeness of prompts

A menu prompt need not include all system-defined user actions available at that point in the user/system dialogue. However, if a menu prompt does not include information about all valid actions available at that point, such information should be available in or via the help message associated with that menu, or in the control menu output (see 5.6.2.1).

### 5.3.6 Error indications

**5.3.6.1** Voice messaging systems shall provide context-sensitive error indications in response to invalid user input, except during voice recording (see 5.1.4).

**5.3.6.2** Error indications may include any of the following:

- an error tone;
- a statement of the nature of the error;
- a description of the current system status;
- what to do, including repeating the original prompt;
- what to do, including more information or options than in the original prompt.

If an error tone is included in the error indication, it shall be presented first.

**5.3.6.3** Error indications, whether tone(s) or system auditory output, shall terminate dial-ahead sequences. The error tone shall be non-interruptible. A statement of the nature of the error may include a non-interruptible portion. Other portions of an error indication shall be interruptible.

After some system-determined number of consecutive errors or of total errors, including periods of no input from the user, the system may take some special action (e.g., disconnecting or connecting to an attendant), after informing the user that such action will occur.

At the conclusion of, or as part of, the error indication, a prompt should be played that indicates the options available at the state that was reached when the error was encountered.

### 5.3.7 Output of messages

Message output can consist of up to three parts: a system-supplied header, the message as supplied by the message originator, and a system-supplied end-of-message prompt.

**5.3.7.1** A message header or end-of-message prompt is not required; however, if one is provided, it shall be interruptible. A message header may include information about the type of message, the date and time a message was delivered, and whatever is known about the message originator (e.g., name, telephone number, etc.). If automatic playback of headers is implemented, the choice



between automatic playback and suppression of the message headers should be user configurable, and the interface should provide a way to move directly from the header to the message content.

**5.3.7.2** The message itself shall be interruptible.

### **5.3.8 System help**

**5.3.8.1** Help shall be available in all input contexts and interruptible output contexts, except as specified in 5.3.8.3 and 5.3.8.7. Menu prompts and titles alone are not considered help.

**5.3.8.2** Help shall consist of one or more of the following parts:

- a statement of the current activity;
- a repetition of the prompted choices;
- further descriptions of menu choices;
- descriptions of additional (originally unprompted) available options.

**5.3.8.3** The effect of a help request during the playing of a help message itself may be system and context dependent.

**5.3.8.4** All valid menu choices available in the system state from which pre-recorded help was requested shall be operable during the entire help output, and key presses selecting such options shall immediately terminate the help output and effect the choice selected. This implies that only keys which are not assigned in the state from which help was requested shall be available for other functions which apply to help itself.

**5.3.8.5** If a time-out for no action occurs after a pre-recorded help prompt, the system shall prompt the user with appropriate choices (see 5.4.2).

**5.3.8.6** The help message associated with a main menu shall describe access to the control menu.

**5.3.8.7** When help is accessed via the control menu, the help message shall be appropriate to the context from which the control menu was accessed, and may include help about the control menu functions accessible from that context.

**5.3.8.8** When a system returns from help to a data entry context or a voice input context, interrupted user input may be retained or discarded. The user should be informed of this disposition.

## **5.4 Time-outs**

### **5.4.1 General**

A time-out is a voice messaging system state change in response to a period in which no user input is detected (see annex A.10). Voice messaging systems shall provide an inter-key time-out (5.4.3) and a time-out for no action (5.4.2).

### **5.4.2 Time-out for no action**

**5.4.2.1** The time-out for no action is the time the system waits before continuing after a prompt requiring user input, if no user input is received. In data entry states, voice input need not be

detected or considered. The range for the time-out for no action for functional areas within the scope of this International Standard should be no shorter than 3 s and should be no greater than 30 s. See annex A.10 for further guidance on use of time-outs in different contexts.

**5.4.2.2** In DTMF data entry and voice input contexts, a time-out for no action should normally result in the user being reprompted. After some system-determined number of consecutive time-outs, the system may take some special action (e.g., disconnecting or connecting to an attendant), typically after informing the user.

**5.4.2.3** At a menu or prompt, the time-out for no action should lead to repetition of the original menu or prompt, or to more detailed information.

### **5.4.3 Inter-key time-out**

**5.4.3.1** The inter-key time-out is the time allowed between key presses during multi-digit data entry states. The range for the inter-key time-out shall be at minimum 3 s, and should be at maximum 8 s.

**5.4.3.2** After an inter-key time-out occurs during a data entry state, the system may interpret the time-out as a delimiter, or may prompt the user to explicitly delimit the data, or take other appropriate action.

**5.4.3.3** This International Standard does not specify the disposition of DTMF input occurring after the inter-key time-out and before the time-out for no action. Such disposition may be both context-dependent and system-dependent.

### **5.4.4 Behaviour after repeated time-outs**

After some system-determined number of consecutive time-outs or of total time-outs, the system may take some special action (e.g., disconnecting or connecting to an attendant), after informing the user that such action is about to occur.

### **5.4.5 Time-outs during voice input**

If a time-out for no action is detected during a voice input context after some voice input has been received, it should be interpreted as a delimiter.

## **5.5 System response times**

### **5.5.1 Response time on dial-through**

In normal operation, the time from receipt of DTMF causing dial-through to the cessation of ongoing system output shall be less than 0,5 s on 95% of occasions, and should never exceed 1 s.

### **5.5.2 Feedback response time**

In all situations where DTMF input is explicitly or implicitly delimited, either because it is of fixed length or through the entry of an explicit delimiter, the time from system receipt of the last key press to the beginning of the next system output (e.g. confirmation of entry, comfort message etc.) shall be less than 3 s on 95% of occasions, in normal operation.



If the wait is likely to be longer than 6 s, the system should inform the user of such delays.

### 5.5.3 Minimum response time

The minimum delay from receipt of DTMF entry to the audible start of the resulting system response should be sufficient to accommodate the needs of users with DTMF keypads built into telephone handsets and those with separate DTMF senders.

## 5.6 Basic use of the # and \* keys

This subclause defines the key sequences corresponding to a small number of navigational and user guidance functions that apply generally within the system.

The two keys corresponding to \* and # on a DTMF telephone are used, alone or in conjunction with other keys, to invoke basic navigational and user guidance from any point in the user/system dialogue, unless otherwise specified in individual clauses of this standard.

### 5.6.1 Use of the # key

In general, the # key indicates that the user has completed the current activity or entry and instructs the system to delimit this activity and move on to the next activity or state of the user/system dialogue.

**5.6.1.1** When a delimiter is required for voice input or for various forms of numeric or data entry, # shall indicate the end of input and cause the system to begin the next system output. A time-out may also serve as a delimiter (see 5.4.3.2). A redundant # entered in a fixed-length data entry context (i.e., entered after the expected number of characters but within the inter-key time-out) shall be ignored.

**5.6.1.2** If the user is listening to messages, pressing # shall delimit the current message, and result in a skip to the next logical state.

**5.6.1.3** In call answering, when a user is listening to a subscriber's greeting, pressing # shall end the greeting and skip to the record tone or a prompt indicating other available options, if there are any.

**5.6.1.4** No delimiter should be required for a single key menu selection.

### 5.6.2 Basic use of \* to access the control menu

Whenever DTMF is enabled, except within the control menu itself, pressing \* at any point in the system shall give the user access to the control menu except as detailed in 5.3.2, 5.3.3.4, and 5.3.6.3.

It should be noted that there is a large installed base of terminals which use the \* key to switch from pulse to DTMF signaling on a per-call basis. This may result in a system receiving a \* when the user did not intend to send one, or not receiving one when the user did intend to send one. System designers should consider this carefully, especially when specifying the effect of the cancel/backup function (i.e., a user enters \*\* ) when no prior DTMF input has been received from the caller.

### 5.6.2.1 Control menu

Table 1 and Figure 3 list the functions accessible from the control menu:

**Table 1 - Results of user input at the control menu**

| User action | Effect                                               | Conformance level  |
|-------------|------------------------------------------------------|--------------------|
| 1,2,3,4,5,6 | Not specified                                        |                    |
| 7           | Go to top level menu                                 | Optional/reserved  |
| 8           | Select language                                      | Optional/reserved  |
| 9           | Forced disconnect                                    | Mandatory/reserved |
| *           | Cancel/backup                                        | Mandatory/reserved |
| 0           | Help                                                 | Mandatory/reserved |
| #           | Return to prior context                              | Mandatory/reserved |
| No action   | Reprompt                                             | Mandatory/reserved |
| Disconnect  | Same as in context in which control menu was invoked | Mandatory/reserved |

|                              |                      |                                 |
|------------------------------|----------------------|---------------------------------|
| 1                            | 2                    | 3                               |
| 4                            | 5                    | 6                               |
| 7<br>Go to top level<br>menu | 8<br>Select language | 9<br>Forced<br>disconnect       |
| *<br>Cancel/backup           | 0<br>Help            | #<br>Return to prior<br>context |

**Figure 3 - Control menu key allocations**

Functions on the control menu are accessed directly from any system state other than the control menu by pressing \* and then the key-press specified in Table 1. This is an example of dial-ahead. Alternatively, users can access the control menu (unless already in the control menu ) by pressing \* and then listening to all or part of the menu prompt and then making the single key-press selection from Table 1.

The conformance levels used in Table 1 and all other tables in which conformance levels appear are explained in clause 2 (conformance).

Selecting go to top level menu positions the user at the highest level menu in the application and presents the associated menu prompt. For example, within a stand-alone voice messaging application, selecting go to top level menu moves the user to the main menu (see 7.5). If the voice messaging application was itself selected from within another higher level application, the effect of the function is system dependent, and may, for example, move the user to the top level menu in that higher level application.

Selecting select language invokes the functionality described in 5.7.

Selecting forced disconnect causes the system to disconnect the call.

Selecting cancel/backup invokes a context and system dependent backup. Some examples of what this function might do in different contexts are given below:

- If from a menu, go back one step or menu level.
- During data entry, if there is unlimited data, clear it and reprompt for the data (see 5.4.2.3). Otherwise go back one prompt or menu level.
- During voice input, if there is unlimited voice input, clear it and reprompt with at least the record tone. Otherwise go back one step or menu level.
- In other contexts, the result is system-dependent.

Selecting help shall invoke the help function, as described in 5.3.8.

Selecting return to prior context shall exit the control menu and return the user to the point from which the control menu was invoked.

If the user makes no input at the control menu before the expiry of a time-out for no action, the user is reprompted as specified in 5.4.

Note: Due to the context- and system-dependent nature of some control menu functions, consideration should be given to providing context-specific prompts for these functions.

## **5.7 Language of system prompts**

### **5.7.1 System behaviour where language selection is not available**

If a system offers only one language, it shall respond to the "select language" command with an error indication, including an error tone if the system uses one. The system shall then return to the state from which the control menu was accessed, or, if the "select language" function was provided and accessed from another menu, to that menu.

### **5.7.2 Language selection by users at the control menu**

When users select the language option from the control menu, they shall be prompted with a series of interruptible prompts in each of the available language choices, each describing the user action required to select that language. For example:

- *For instructions in English, press 1*
- *Pour les instructions en français, appuyer sur le 2*
- *Para instrucciones en español, marque el 3.*

When the last language prompt has been played, the system shall wait the duration of the "time-out for no action". If no action is taken by the user, the menu shall repeat once. After a second "time-out for no action" expires, the system shall return to the state from which the control menu was accessed.

Note: The example given is not intended to specify a particular set or order of presentation of languages, nor specific prompt wording.

### 5.7.3 Language selection for voice messaging system subscribers

Once a subscriber to a voice messaging system has accessed the system, it shall present the system prompts in the spoken language chosen by the subscriber. This language selection may be implemented by the system administrator, or directly by the subscriber.

### 5.8 Navigation between functions

This International Standard allows various methods of navigation between functional areas of a voice messaging service. For example, navigation from "listen" functions to "send" functions may be achieved by:

- a) return to top-level menu using \*7 followed by 2 (this shall be provided: see 5.6.2.1);
- b) use of an unreserved key on the "listen" menu to move directly or via a subordinate navigation menu, to the "send" function;
- c) use of an unreserved key on the "control" menu to move directly, or via a subordinate navigation menu, to the "send" function (see 5.6.2.1).

## 6 Call answering

### 6.1 General

A typical call-answering sequence consists of:

- the direction of an incoming call to the system;
- a greeting output by the system to the caller;
- a record tone;
- the voice input of a message by the caller;
- disconnect by the caller.

Figure 4 illustrates a sample flow for call answering.

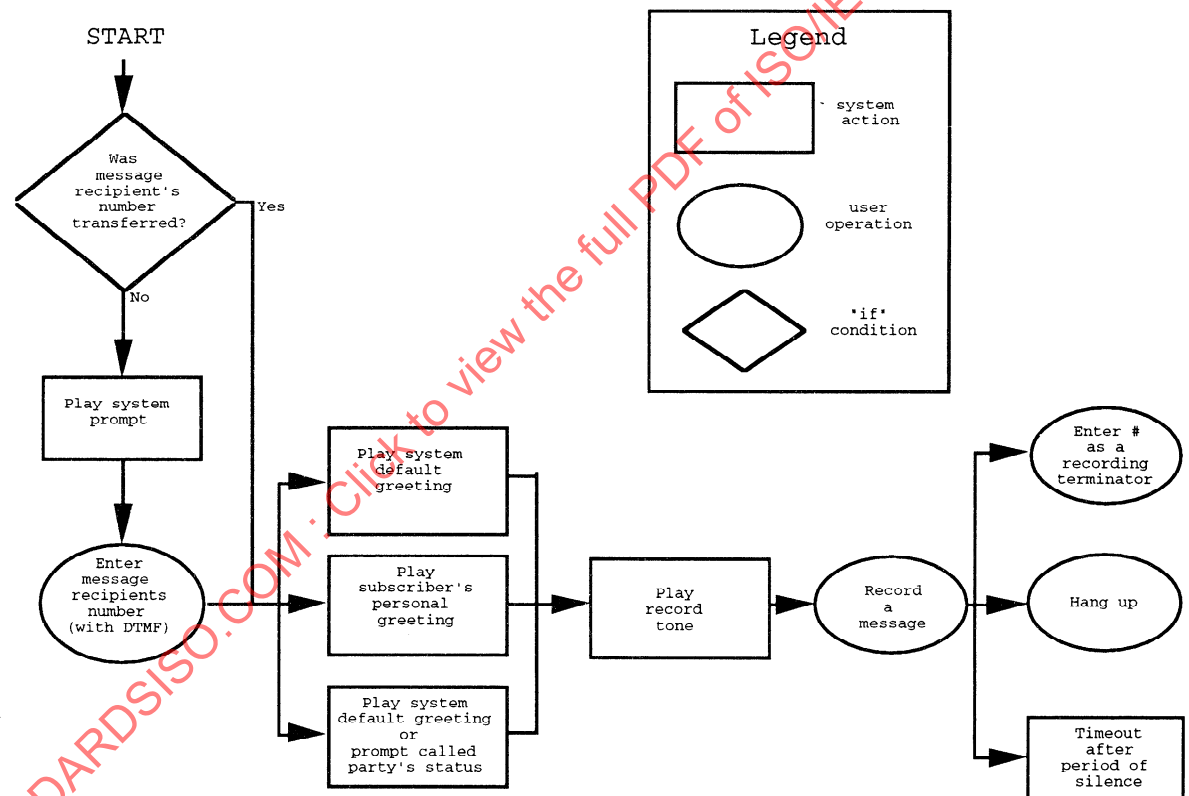


Figure 4 - Sample call flow for call answering

The mechanism by which a call is directed to the system is outside the scope of this International Standard.

The system shall allow callers using non-DTMF telephones, including rotary or dial-pulse telephones, to leave messages, when the system is provided with the telephone number of the subscriber whose telephone was called.

## 6.2 Language of prompts

Subscriber greetings may be recorded in any language or combination of languages.

Subclauses 6.2.1 to 6.2.3 apply only to systems with multiple languages.

**6.2.1** Unless the caller has made a specific selection with the select language command on the control menu, any system prompts played to the caller shall be in the language selected for callers by that subscriber.

**6.2.2** The system shall permit the subscriber to select the language to be heard by their callers independently from the language selected by the subscriber for their own use in interacting with voice mail.

**6.2.3** As some subscribers may commonly have callers with differing languages, it is recommended that systems provide the ability for a subscriber to select a set of prompts that combines multiple languages. For example, a subscriber in a bilingual area could choose either of the two languages, or both, for the prompts to be heard by their callers.

## 6.3 Default greeting

The system shall provide a default greeting that instructs callers on the procedures for leaving a message.

The default greeting may be replaced by or combined with a subscriber-defined greeting. Subscriber-defined greetings are outside the scope of this International Standard.

The greeting, whether system default or subscriber-defined, shall be interruptible by user action, in accordance with Table 2 in 6.5.

## 6.4 Mailbox access from call answering

In the call answering application, if a method is provided for allowing subscribers to switch from the call answering dialogue to mailbox access, pressing \*7 shall invoke a dialogue that allows this access.

## 6.5 Results of user input before the record tone during call answering

Table 2 and Figure 5 show the results of user input before the record tone during call answering.

**Table 2 - Results of user input before the record tone during call answering**

| User action  | Effect                                          | Conformance level     |
|--------------|-------------------------------------------------|-----------------------|
| 1,2,3,4,5,6, | Not specified                                   |                       |
| 7            | Skip backward                                   | Optional/not reserved |
| 8            | Not specified                                   |                       |
| 9            | Skip forward                                    | Optional/not reserved |
| *            | Access control menu                             | Mandatory/reserved    |
| 0            | Connect to human, if available, or machine help | Mandatory/reserved    |
| #            | Stop greeting playback                          | Mandatory/reserved    |
| No action    | Play record tone                                | Mandatory/reserved    |
| Disconnect   | Not specified                                   |                       |

|                          |                               |                             |
|--------------------------|-------------------------------|-----------------------------|
| 1                        | 2                             | 3                           |
| 4                        | 5                             | 6                           |
| 7<br>Skip backward       | 8                             | 9<br>Skip forward           |
| *<br>Access control menu | 0<br>Connect to human or help | #<br>Stop greeting playback |

**Figure 5 - Key allocations before the record tone during call answering**



In voice messaging system states described in Table 2, connect to human disconnects the caller from the messaging system and attempts to transfer the caller to a pre-determined or caller-specified destination. Where the connect to human function is not available, the system shall provide pre-recorded machine help.

The skip backward command causes the output of the greeting to jump back to an earlier point. The temporal extent of the jump is system dependent. Where the requested jump extends back before the start of the greeting, output shall continue from the start.

The skip forward command causes the output of the greeting to jump forward to a later point. The temporal extent of the jump is system dependent, but should be the same as for the skip backward command. Where the requested jump extends beyond the end of the greeting, call answering should proceed as if the stop greeting playback function had been requested.

The stop greeting playback command causes the system to take the action that would normally occur after the greeting ended, e.g. play the record tone or prompt for other options.

## 6.6 Content of voice user input

The content of user voice input is outside the scope of this International Standard.

## 6.7 System action after the record tone

The system action after the record tone depends on the user action in accordance with Table 3 and Figure 6.

**Table 3 - Results of user input after the record tone  
during call answering**

| User action          | Effect                                            | Conformance level     |
|----------------------|---------------------------------------------------|-----------------------|
| 1,2,3,4,5,6,7,8,9    | Not specified                                     |                       |
| *                    | Access control menu                               | Mandatory/reserved    |
| 0                    | Connect to human, if available, or machine help   | Mandatory/reserved    |
| #                    | Delimit message                                   | Mandatory/reserved    |
| No action            | Stop recording and reprompt user                  | Optional/not reserved |
| Pause in voice input | Delimit input and skip to next logical state      | Optional/not reserved |
| Disconnect           | Place message in mailbox, unless no message input | Mandatory/reserved    |



|                             |                                  |                      |
|-----------------------------|----------------------------------|----------------------|
| 1                           | 2                                | 3                    |
| 4                           | 5                                | 6                    |
| 7                           | 8                                | 9                    |
| *<br>Access control<br>menu | 0<br>Connect to<br>human or help | #<br>Delimit message |

**Figure 6 - Key allocations after the record tone during call answering**

In Table 3, connect to human disconnects the caller from the messaging system, depositing a message if one was left, and attempts to transfer the caller to a pre-determined or caller specified destination. Where the "connect to human" function is not available, the system then provides pre-recorded machine help.

**6.7.1** Any form of disconnect shall cause the message-in-progress to be placed in the voice mailbox associated with the called number, except if there is no voice content to the message, in which case the system may discard the message.

**6.7.2** If, after recording is delimited, the system provides the caller with any options, the control menu and its functions shall also be accessible. Also, if the connect to human function was available before the record tone, it shall be available at this point. If the caller is given the option to correct or replace their message, the system should provide the same interface to features as specified in Table 6.

## 7 Voice mail application

### 7.1 General

A typical sequence for listening to messages in the voice mailbox and sending messages is for the user to access the system, access his/her voice mailbox and then request the desired action.

### 7.2 Notification of new messages

The system may notify a mailbox owner of the presence of messages or of new messages in the mailbox; this notification may be part of the system access procedure or may exist independently of it. The medium and form of this notification are beyond the scope of this International Standard.

### 7.3 Mailbox access

Access to the voice mailbox is typically via entry of a security code and user ID pair. Security code and user ID entries may, but need not, be delimited with the # key. Beyond this, this International Standard does not cover access to the voice mailbox.

This International Standard does not require that the security code and user identification be entered in a particular order.

Figure 7 shows a typical flow for mailbox access.

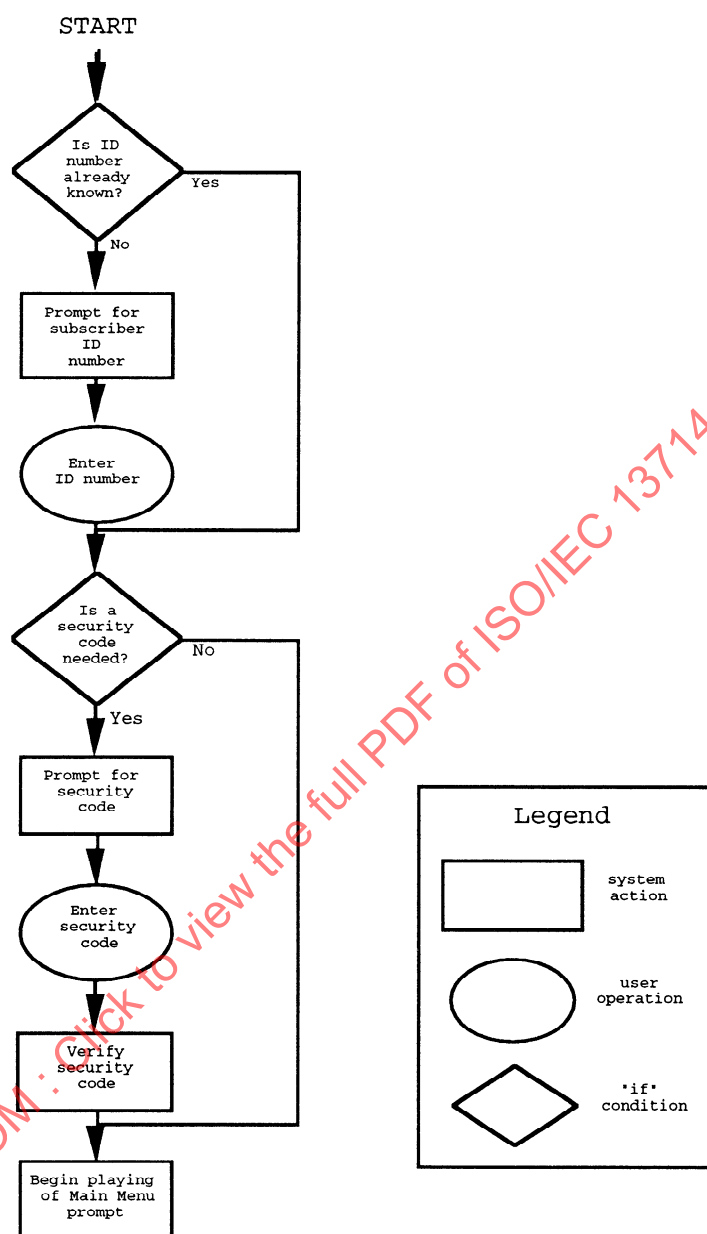


Figure 7 - Typical flow for mailbox access.

#### 7.4 New messages announcement

The system shall inform the user of the presence of new message(s) in the voice mailbox before presenting the main menu. The form of this announcement is beyond the scope of this International Standard. No announcement is required if there are no new messages in the voice mailbox.

## 7.5 The main menu

After a valid mailbox access sequence and announcement of new messages, if any, the system shall prompt the user with available options, such as listening to messages and, possibly, sending messages. This is considered the main menu.

Voice messaging system action from the main menu shall depend on user action, in accordance with Table 4 and Figure 8:

**Table 4 - Results of user input at the main menu**

| User action   | Effect        | Conformance level     |
|---------------|---------------|-----------------------|
| 1             | Listen        | Mandatory/reserved    |
| 2             | Create/send   | Optional/not reserved |
| 3,4,5,6,7,8,9 | Not specified |                       |
| *             | Control menu  | Mandatory/reserved    |
| 0             | Not specified |                       |
| #             | Not specified |                       |
| No action     | Repeat prompt | Mandatory/reserved    |
| Disconnect    | End session   | Mandatory/reserved    |

|                   |                  |   |
|-------------------|------------------|---|
| 1<br>Listen       | 2<br>Create/send | 3 |
| 4                 | 5                | 6 |
| 7                 | 8                | 9 |
| *<br>Control menu | 0                | # |

**Figure 8 - Main menu key allocations**

**7.5.1** The announcement of the presence of messages and the main menu prompt shall be interruptible, with results in accordance with Table 4.

**7.5.2** Mailboxes may be configured such that playback of messages begins and/or continues automatically after mailbox access, and any new message announcement, without subscriber DTMF input. Such automatic operation should be user-configurable.


## **7.6 Listening to messages**

A typical sequence for listening to and processing messages in the voice mailbox is:

- a) the user selects listen from the main menu to request access to the messages;
- b) the first/next message is played back (see 7.6.2);
- c) when the message finishes, the system prompts for the disposition of the message or other response options;
- d) the user indicates the disposition of the message or invokes other response options;
- e) if there are additional messages, b), c), d), and e) are repeated as needed;
- f) the user can leave the sequence at any time by disconnecting or invoking any other system function.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 13714:1995

Figure 9 illustrates a typical flow for listening to messages:

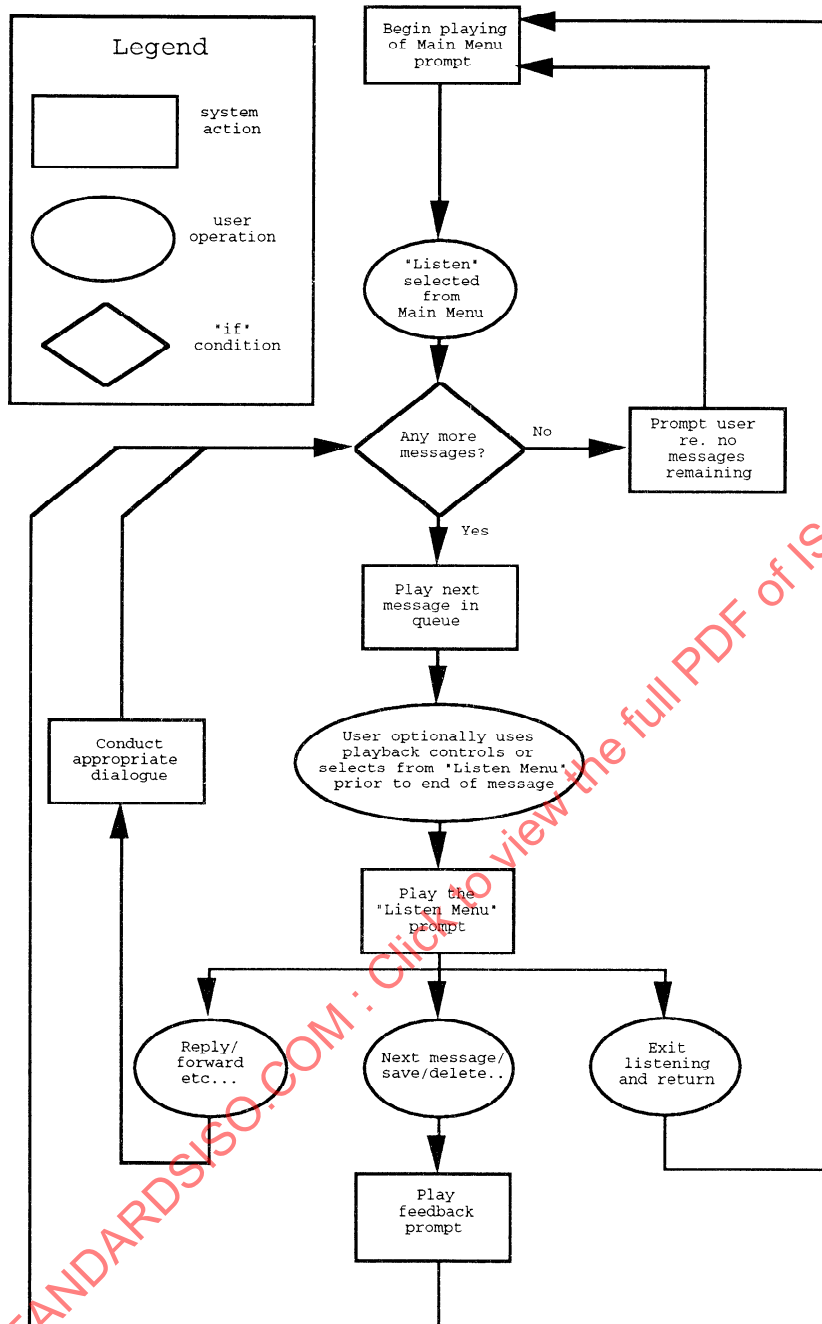

**Figure 9 - A typical flow for listening to messages**

**7.6.1** A user shall be able to dial through message playback, by selecting from the listen menu (See 7.6.3).

**7.6.2** The order in which messages are presented during playback (e.g., chronological order, reverse chronological order, precedence order) is outside the scope of this International Standard.

**7.6.3** In the basic subscriber exchange for listening to messages, the menu prompt shall be interruptible, with results in accordance with Table 5 and Figure 10. The action taken upon termination of the dialogue for each message shall depend on the user's DTMF input during or after message playback in accordance with Table 5 :

**Table 5 - Results of user input at the listen menu**

| User action | Effect                                                 | Conformance level     |
|-------------|--------------------------------------------------------|-----------------------|
| 1           | (Re) Play message                                      | Mandatory/reserved    |
| 2           | Save message                                           | Optional/reserved     |
| 3           | Delete message                                         | Optional/reserved     |
| 4,5,6       | Not specified                                          |                       |
| 7           | Skip backward                                          | Optional/not reserved |
| 8           | Not specified                                          |                       |
| 9           | Skip forward (during listening)                        | Optional/not reserved |
| *           | Control menu                                           | Mandatory/reserved    |
| 0           | Not specified                                          |                       |
| #           | Skip to next message                                   | Mandatory/reserved    |
| No action   | Reprompt user                                          | Mandatory/reserved    |
| Disconnect  | End session with no change to state of current message | Mandatory/reserved    |

|                    |           |                                       |
|--------------------|-----------|---------------------------------------|
| 1<br>(Re)Play      | 2<br>Save | 3<br>Delete                           |
| 4                  | 5         | 6                                     |
| 7<br>Skip backward | 8         | 9<br>Skip forward<br>during listening |
| *<br>Control menu  | 0         | #<br>Skip to next<br>message          |

**Figure 10 - Listen menu key allocations**

Note: Functions assigned to keys that are not specified in Table 5 and the key (9) assigned to skip forward may have different effects during and after playback in listen contexts. It should be noted that these options, although unprompted, are implicitly available during message output. This implicit menu and the prompted menu that applies after listening to a message are logically distinct.

The play command causes playback of the current message from the beginning. Where there is no current message (i.e., there are no messages at all or the user has gone beyond the last message) an appropriate system message is output.

The save command causes the current message to be explicitly saved in the user's mailbox, and the system to advance to the next message (if any). The exact details of the user actions involved in subsequently retrieving the message are not described in this standard.

The delete message command causes the current message to be deleted from the user's mailbox, and the system to advance to the next message (if any). This International Standard does not specify whether the message will be immediately deleted or marked for later deletion. The system should provide a mechanism for a user to recover a message which has been deleted prior to the user disconnecting. The means by which a user recovers a message which has been deleted by mistake is system dependent, and is outside the scope of this International Standard.

The skip backward command causes the output of the current message to jump back to an earlier point in the same message. The temporal extent of the jump is system dependent. Where the requested jump extends back before the start of the message, output continues from the start of the message. When a skip backward is requested after the message has ended, playback resumes as if the function was requested immediately prior to the message ending.

The skip forward command causes the output of the current message to jump forward to a later point in the same message. The temporal extent of the jump is system dependent, but should be the same as for the skip backward command. Where the requested jump extends beyond the end of the current message, output stops as if the end of the message had been reached. When fast-forward is requested after the message has ended, no action is taken except that the system may prompt the user appropriately. If the fast forward function is provided and the 9 key is assigned a different



function after a message has finished playing, careful consideration should be given to the selection of this function since users fast forwarding through a message will often invoke it inadvertently.

The effect of a # at the listen menu is to go to the next message or its associated header, if there is a next message. The status of the skipped message should not change.

**7.6.4** Voice messages that are skipped or not explicitly deleted shall be saved. This International Standard does not specify whether they shall be saved as old messages or left as new messages.

**7.6.5** Playback of header information should be user configurable. Also see 5.3.7.

## **7.7 Sending messages**

A typical sequence for a subscriber sending a message is:

- a) the user invokes the send function from the main menu;
- b) the system begins the message creation dialogue;
- c) the user provides the message (as voice input), the desired destination(s), and then empowers the system to send the message.

This International Standard does not specify the relative ordering of addressing and recording a message.

**7.7.1** After input of the message and the address(es), the system shall present the send menu, which shall be interruptible. The action taken by the system shall depend on user action, in accordance with Table 6 and Figure 11:

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 13714:1995

**Table 6 - Results of user input at the send menu**

| User action | Effect                   | Conformance level     |
|-------------|--------------------------|-----------------------|
| 1           | (Re) Play from beginning | Mandatory/reserved    |
| 2           | Save message             | Optional/not reserved |
| 3           | Delete message           | Optional/reserved     |
| 4           | Send message             | Optional/reserved     |
| 5,6         | Not specified            |                       |
| 7           | Skip backward            | Optional/not reserved |
| 8           | Not specified            |                       |
| 9           | Skip forward             | Optional/not reserved |
| *           | Control menu             | Mandatory/reserved    |
| 0           | Not specified            |                       |
| #           | Skip to next state       | Mandatory/reserved    |
| No action   | Reprompt user            | Mandatory/reserved    |
| Disconnect  | Send message             | Mandatory/reserved    |

|                    |           |                         |
|--------------------|-----------|-------------------------|
| 1<br>(Re) Play     | 2<br>Save | 3<br>Delete             |
| 4<br>Send          | 5         | 6                       |
| 7<br>Skip backward | 8         | 9<br>Skip forward       |
| *<br>Control menu  | 0         | #<br>Skip to next state |

**Figure 11 - Send menu key allocations**

Note: Functions assigned to keys that are not specified in Table 6 and the key (9) assigned to skip forward may have different effects during and after (re) play of a previously recorded message in the send context. It should be noted that these options, although unprompted, are implicitly available during message output. This implicit menu and the prompted menu that applies after listening to a previously recorded message in the send context are logically distinct.

The effects of the play, save, skip backward, and skip forward commands are as specified in 7.6.3.

The delete command deletes only the voice input. This command should allow re-recording of the message. It is also recommended that users be provided with a means for modifying or deleting addresses of a message.

The send command causes the system to send the current voice message (typically the one which the user has just recorded) to the required destination address(es).

**7.7.2** During message recording, the functions shown in Table 7 and Figure 12 shall be available.

**Table 7 - Results of user input after the record tone during message recording**

| User action          | Effect                                                | Conformance level     |
|----------------------|-------------------------------------------------------|-----------------------|
| 1,2,3,4,5,6,7,8,9    | Not specified                                         |                       |
| *                    | Control menu                                          | Mandatory/reserved    |
| 0                    | Not specified                                         |                       |
| #                    | Delimit message                                       | Mandatory/reserved    |
| No action            | Stop recording and reprompt user                      | Optional/not reserved |
| Pause in voice input | Delimit input and skip to next logical state          | Optional/not reserved |
| Disconnect           | If message recorded and address entered, send message | Mandatory/reserved    |

|                   |   |                      |
|-------------------|---|----------------------|
| 1                 | 2 | 3                    |
| 4                 | 5 | 6                    |
| 7                 | 8 | 9                    |
| *<br>Control menu | 0 | #<br>Delimit message |

**Figure 12 - Key allocations after the record tone during message recording**

The effects of time-outs are described in 5.1.3 and 5.4.

**7.7.3** Any form of disconnect, once both address and message are complete, shall cause the message to be sent, unless the system provides a user-configurable option to not send messages on disconnect and the user has selected this option.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 13714:1995

## 8 Voice bulletin boards

### 8.1 Access to bulletin boards

Access to bulletin boards is typically via entry of a security code and user ID pair. Security code and user ID entries may, but need not, be delimited with the # key. Beyond this, this International Standard does not cover access to bulletin boards.

This International Standard does not require that the security code and user identification be entered in a particular order.

Figure 13 shows a typical flow for access to bulletin boards:

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 13714:1995

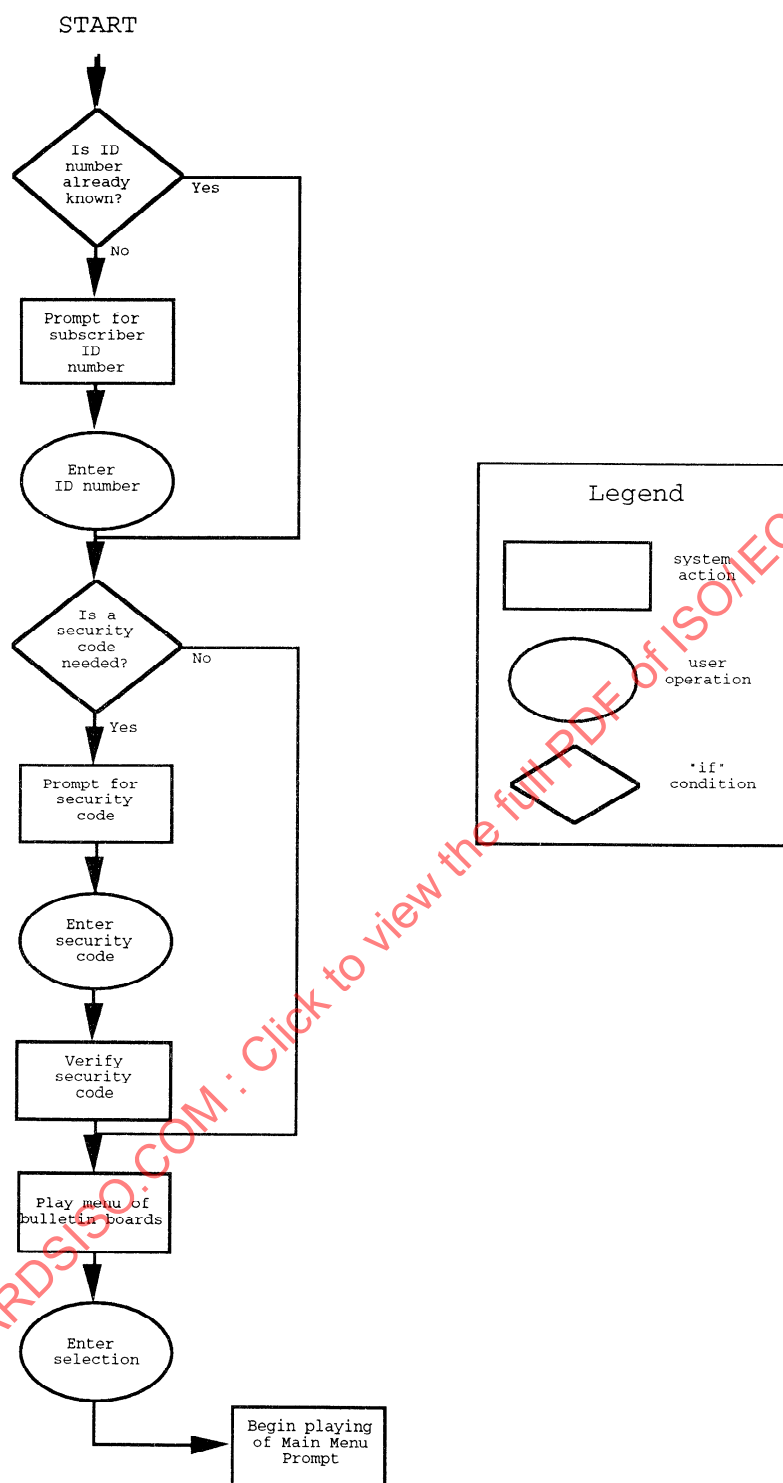


Figure 13 - Typical flow for access to bulletin boards

## 8.2 Management of bulletin boards

A bulletin board system can inform the users of the list of available bulletin boards by means of prompts. However, the number of available bulletin boards is often very large, and information about the available bulletin boards may instead be offered by means of another medium, such as a printed directory.

Usually a system administrator will carry out management activities associated with the maintenance of the bulletin boards, such as the creation of new boards, or the deletion of old ones.

This International Standard does not cover the way in which users are informed of the list of available bulletin boards, nor administration/management activities.

## 8.3 New message announcement

The system shall inform the user of the presence of new message(s) in the bulletin board before the main menu is presented. The form of this announcement is beyond the scope of this International Standard.

## 8.4 The main menu

After a valid mailbox access sequence and selection of a board, the system shall prompt the user with basic options, including listening to messages and leaving messages in the bulletin board. This set of basic options is referred to as the main menu.

In a bulletin board system, action from the main menu shall depend on user action, in accordance with Table 8 and Figure 14:

**Table 8 - Functions accessible from the bulletin board main menu**

| User action   | Effect          | Conformance level     |
|---------------|-----------------|-----------------------|
| 1             | Listen          | Mandatory/reserved    |
| 2             | Leave a message | Optional/not reserved |
| 3,4,5,6,7,8,9 | Not specified   |                       |
| *             | Control menu    | Mandatory/reserved    |
| 0             | Not specified   |                       |
| #             | Not specified   |                       |
| No action     | Reprompt        | Mandatory/reserved    |
| Disconnect    | Exit system     | Mandatory/reserved    |

|                   |                      |   |
|-------------------|----------------------|---|
| 1<br>Listen       | 2<br>Leave a Message | 3 |
| 4                 | 5                    | 6 |
| 7                 | 8                    | 9 |
| *<br>Control menu | 0                    | # |

**Figure 14 - Bulletin board main menu  
key allocations**

### 8.5 Interruption of new messages announcement

The announcement of the presence of messages and the menu prompt shall be interruptible, with results in accordance with Table 8.

### 8.6 Listening to messages

A typical sequence for listening to and processing messages currently in the bulletin board is:

- a) the user selects "Listen" from the main menu to request access to the messages;
- b) the first/next message is played back;
- c) when the message finishes, the system prompts for the disposition of the message or other response options;
- d) the user deals appropriately with the current message, or skips over it;
- e) if there are additional messages, b), c), d), and e) are repeated as needed;
- f) the user can leave the sequence at any time.

Subscribers can save messages into their own mailboxes and remove (cancel) messages which are created by themselves. Non-subscribers may have limited access to functions. Figure 15 illustrates a typical flow for listening to messages:



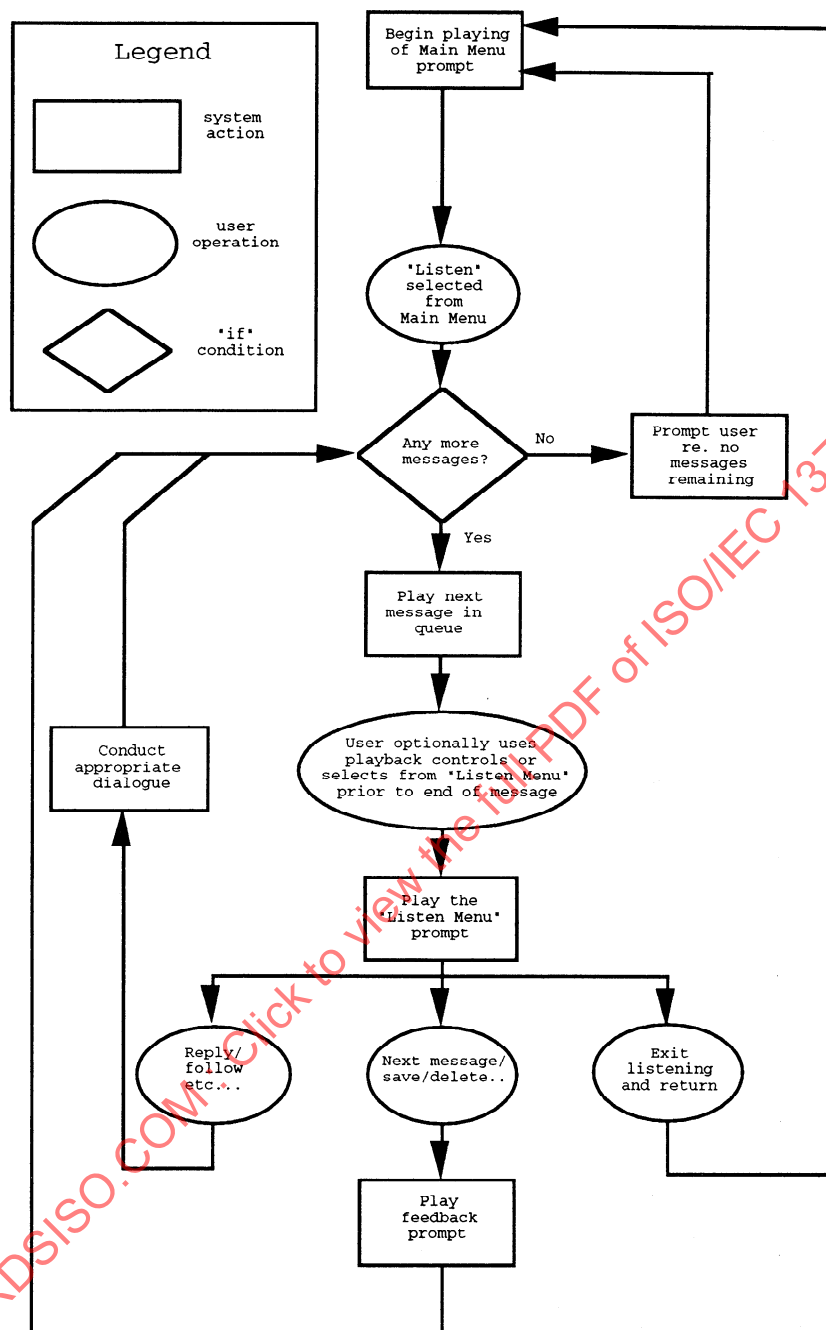


Figure 15 - Typical flow for listening to voice bulletin board messages

**8.6.1** A user shall be able to dial-through message playback.

**8.6.2** The order in which messages are presented during playback (e.g., chronological order, reverse chronological order, precedence order) is outside the scope of this International Standard.

**8.6.3** In the basic subscriber exchange for listening to messages, the menu prompt shall be interruptible, with results in accordance with Table 9 and Figure 16. The action taken upon termination of the dialogue for each message shall depend on the user's DTMF input during or after message playback in accordance with Table 9.

**Table 9 - Results of user input at the bulletin board listen menu**

| User action | Effect                                                                 | Conformance level     |
|-------------|------------------------------------------------------------------------|-----------------------|
| 1           | Play message                                                           | Optional/reserved     |
| 2           | Save message (i.e. copy message to user's mailbox)                     | Optional/reserved     |
| 3           | Delete message (only message creators allowed access to this function) | Optional/reserved     |
| 4,5,6       | Not specified                                                          |                       |
| 7           | Skip backward                                                          | Optional/not reserved |
| 8           | Not specified                                                          |                       |
| 9           | Skip forward<br>(during listening)                                     | Optional/not reserved |
| *           | Control menu                                                           | Mandatory/reserved    |
| 0           | Not specified                                                          |                       |
| #           | Skip to next message                                                   | Mandatory/reserved    |
| No action   | Reprompt user                                                          | Mandatory/reserved    |
| Disconnect  | End session with no change to status of current message                | Mandatory/reserved    |

|                    |                   |                                         |
|--------------------|-------------------|-----------------------------------------|
| 1<br>Play          | 2<br>Save message | Delete message                          |
| 4                  | 5                 | 6                                       |
| 7<br>Skip backward | 8                 | 9<br>Skip forward<br>(during listening) |
| *<br>Control menu  | 0                 | #<br>Skip to next<br>message            |

**Figure 16 - Bulletin board listen menu  
key allocations**

Note: Functions assigned to keys that are not specified in this table and the key (9) assigned to skip forward may have different effects during and after playback in listen contexts. It should be noted that these options, although unprompted, are implicitly available during message output. This implicit menu and the prompted menu that applies after listening to a message are logically distinct.

**8.6.4** Bulletin board messages that are skipped or not explicitly deleted shall be saved; this International Standard does not specify whether they shall be saved as old messages or left as new messages.

**8.6.5** Playback of header information should be user configurable. Also see 5.3.7.

### **8.7 Leaving messages**

A typical sequence for a subscriber leaving a message is:

- a) the user invokes the leave function from the main menu;
- b) the system provides a menu prompt for the leave function;
- c) the user provides the message, as voice input;

**8.7.1** In the basic subscriber exchange for leaving messages, the menu prompt shall be interruptible.

**8.7.2** During the message recording portion of leaving a message, the functions shown in Table 10 and Figure 17 shall be available:

**Table 10 - Results of user input after the record tone during bulletin board message recording**

| User Action          | Effect                                       | Conformance level     |
|----------------------|----------------------------------------------|-----------------------|
| 1,2,3,4,5,6,7,8,9    | Not specified                                |                       |
| *                    | Control menu                                 | Mandatory/reserved    |
| 0                    | Not specified                                |                       |
| #                    | Delimit message                              | Mandatory/reserved    |
| No action            | Stop recording and reprompt user             | Optional/not reserved |
| Pause in voice input | Delimit input and skip to next logical state | Optional/not reserved |
| Disconnect           | Accept message for posting                   | Mandatory/reserved    |

|                   |   |                      |
|-------------------|---|----------------------|
| 1                 | 2 | 3                    |
| 4                 | 5 | 6                    |
| 7                 | 8 | 9                    |
| *<br>Control menu | 0 | #<br>Delimit message |

**Figure 17 - Key allocations after the record tone during bulletin board message recording**

**8.7.3** Once recording has begun, any form of disconnect shall cause the message to be left as a new one, unless the system provides a user-configurable option not to post in case of a disconnect and the user has selected this option.

**8.7.4** After the message recording portion of leaving a message, the functions shown in Table 11 and Figure 18 shall be available:

**Table 11 - Results of user input after leaving a recorded message in a bulletin board**

| User action | Effect                     | Conformance level     |
|-------------|----------------------------|-----------------------|
| 1           | (Re) play from beginning   | Mandatory/reserved    |
| 2           | Save message               | Optional/not reserved |
| 3           | Delete message             | Optional/reserved     |
| 4,5,6,7,8,9 | Not specified              |                       |
| *           | Control menu               | Mandatory/reserved    |
| 0           | Not specified              |                       |
| #           | Skip to next logical state | Mandatory/reserved    |
| No action   | Repeat prompt              | Mandatory/reserved    |
| Disconnect  | Accept message for posting | Mandatory/reserved    |

|                   |                   |                                 |
|-------------------|-------------------|---------------------------------|
| 1<br>(Re) Play    | 2<br>Save Message | 3<br>Delete Message             |
| 4                 | 5                 | 6                               |
| 7                 | 8                 | 9                               |
| *<br>Control menu | 0                 | #<br>Skip to next logical state |

**Figure 18 - Key allocations after leaving a recorded message in a bulletin board**

## 9 Voice message delivery

### 9.1 General

A typical sequence for message delivery is:

- a) a caller gets a busy signal or receives no answer (alternatively, a caller calls a special access number specifically for message delivery and provides the number to which the message is to be delivered);
- b) the caller requests or is offered the opportunity to record a message; optionally, the caller may be able to specify special delivery options, e.g. delaying the delivery time, requesting a reply, specifying the language of the system prompts to be used in delivery, etc.;
- c) the system then calls the originally dialed number, repeatedly, at intervals, if necessary, until the call is answered; and,
- d) when the number is answered, the system plays the message. Optionally, the recipient may be given an opportunity to send a reply.

### 9.2 Creating a message

This subclause of the standard shall govern both the original creation of a message for message delivery, and creation of a “reply” that a recipient of such a message may make using the message delivery service.

**9.2.1** Delimiting voice input is described in 5.1.3, 5.4.2 and 5.6.1.1.

**9.2.2** After initial input of the message, the system shall present the post-recording menu, which shall be interruptible. The action taken by the system shall depend on user action, in accordance with Table 12 and Figure 19:

**Table 12 - Results of user input at the post-recording menu**

| User action | Effect                                              | Conformance level     |
|-------------|-----------------------------------------------------|-----------------------|
| 1           | (Re) Play from beginning                            | Mandatory/reserved    |
| 2           | Not specified                                       |                       |
| 3           | Delete message                                      | Optional/reserved     |
| 4           | Send message                                        | Optional/reserved     |
| 5,6         | Not specified                                       |                       |
| 7           | Skip backward                                       | Optional/not reserved |
| 8           | Not specified                                       |                       |
| 9           | Skip forward during listen                          | Optional/not reserved |
| *           | Control menu                                        | Mandatory/reserved    |
| 0           | Connect to human or help                            | Mandatory/reserved    |
| #           | Skip to next logical state                          | Mandatory/reserved    |
| No action   | Reprompt user                                       | Mandatory/reserved    |
| Disconnect  | If message recorded and address input, send message | Mandatory/reserved    |

|                    |                               |                                 |
|--------------------|-------------------------------|---------------------------------|
| 1<br>(Re)Play      | 2                             | 3<br>Delete                     |
| 4<br>Send          | 5                             | 6                               |
| 7<br>Skip backward | 8                             | 9<br>Skip forward during listen |
| *<br>Control menu  | 0<br>Connect to human or help | #<br>Skip to next state         |

**Figure 19 - Key allocation for post-recording menu commands**

Note: Functions assigned to keys that are not specified in this table and the key (9) assigned to skip forward may have different effects during and after (re) play of a previously recorded message in the send context. It should be noted that these options, although unprompted, are implicitly available during message output. This

implicit menu and the prompted menu that applies after listening to a previously recorded message in the send context are logically distinct.

The effects of the play, save, delete, skip backward and skip forward commands are as specified in 7.6.3.

The send command causes the system to accept the voice message for delivery.

**9.2.3** During the message recording portion of sending a message, the functions shown in Table 13 and Figure 20 shall be available:

**Table 13 - Results of user input after  
the record tone during message  
recording**

| User action             | Effect                                                    | Conformance level     |
|-------------------------|-----------------------------------------------------------|-----------------------|
| 1,2,3,4,5,6,7,8,9       | Not specified                                             |                       |
| *                       | Control menu                                              | Mandatory/reserved    |
| 0                       | Not specified                                             |                       |
| #                       | Delimit message                                           | Mandatory/reserved    |
| No action               | Stop recording and<br>reprompt user                       | Optional/not reserved |
| Pause in voice<br>input | Delimit input and skip to next<br>logical state           | Optional/not reserved |
| Disconnect              | If message recorded and<br>address input, send<br>message | Mandatory/reserved    |



|                   |   |                      |
|-------------------|---|----------------------|
| 1                 | 2 | 3                    |
| 4                 | 5 | 6                    |
| 7                 | 8 | 9                    |
| *<br>Control menu | 0 | #<br>Delimit message |

**Figure 20 - Key allocations after the record tone during message recording**

The effects of time-outs are described in 5.1.3, 5.4.2 and 5.6.1.1.

**9.2.4** Any form of disconnect, once a message has been recorded, shall cause the message to be accepted for delivery, unless the system provides a user-configurable option not to send in case of a disconnect and the user has selected this option.

### **9.3 Receiving and listening to the message**

A typical sequence for receiving and listening to a Message Delivery message is:

- a) the recipient's number is answered;
- b) optionally, the system requests confirmation that the correct person has answered the telephone;
- c) the message is played back;
- d) when the message finishes, the system prompts with options.

**9.3.1** A user shall be able to dial-through message playback, by selecting from the Playback Menu. The Playback Menu prompt shall be interruptible with results in accordance with Table 14 and Figure 21:

**Table 14 - Results of user input at the playback menu**

| User action | Effect                              | Conformance level     |
|-------------|-------------------------------------|-----------------------|
| 1           | (Re) Play from beginning            | Optional/reserved     |
| 2,3,4,5,6   | Not Specified                       |                       |
| 7           | Skip backward                       | Optional/not reserved |
| 8           | Not Specified                       |                       |
| 9           | Skip forward (during listening)     | Optional/not reserved |
| *           | Control menu                        | Mandatory/reserved    |
| 0           | Connect to human or help            | Mandatory/reserved    |
| #           | Not Specified                       |                       |
| No action   | Repeat prompt                       | Mandatory/reserved    |
| Disconnect  | System and implementation dependent |                       |

|                       |                     |                                         |
|-----------------------|---------------------|-----------------------------------------|
| 1<br>Play             | 2                   | 3                                       |
| 4                     | 5                   | 6                                       |
| 7<br>Skip<br>Backward | 8                   | 9<br>Skip Forward<br>(during listening) |
| *<br>Control menu     | 0<br>Human/<br>Help | #                                       |

**Figure 21 - Key allocations for playback menu commands**

Note: Functions assigned to keys that are not specified in this table and the key (9) assigned to skip forward may have different effects during and after playback in listen contexts. It should be noted that these options, although unprompted, are implicitly available during message output. This implicit menu and the prompted menu that applies after listening to a message are logically distinct.

The effects of the play, skip backward and skip forward commands are as specified in 7.6.3.