

AEROSPACE INFORMATION REPORT

SAE AIR1823

REV. B

Issued 1986-10
Reaffirmed 2003-10
Cancelled 2011-05

Superseding AIR1823A

Engineering Analysis System (EASY) Computer Program
for Dynamic Analysis of Aircraft ECS

RATIONALE

The computer program on which this document is based is quite old. The program in the form that the document is based on, is little used. There is an improved version, but it is proprietary and would be difficult to document. There are other programs being used for ECS transient analysis. It does not seem appropriate to just document one of many available programs. The document should be cancelled.

CANCELLATION NOTICE

This document has been declared "CANCELLED" as of May 2011. By this action, this document will remain listed in the Numerical Section of the Aerospace Standards Index.

SAENORM.COM : Click to view the full PDF of air1823b

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2011 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

**SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AIR1823B>**

TABLE OF CONTENTS

1.	SCOPE	3
1.1	Purpose	3
2.	REFERENCES.....	3
2.1	SAE Publications.....	3
2.2	Other References.....	3
2.3	Definitions	4
3.	BACKGROUND ON COMPUTERIZED TRANSIENT ECS ANALYSIS	6
4.	GENERAL FEATURES OF EASY.....	8
4.1	Analysis Capabilities	8
4.2	Usage Aspects.....	9
5.	EASY COMPUTER PROGRAM.....	10
5.1	History of Program	11
5.2	EASY Program Capabilities	11
5.3	Program Organization.....	11
5.3.1	Model Generation Program	11
5.3.2	Analysis Program	14
5.3.3	File Maintenance Program	14
5.4	Problem Input.....	14
5.4.1	Model Generation Program Input.....	14
5.4.2	Analysis Program Input.....	15
5.5	Program Output	15
5.5.1	Model Generation Program Output	16
5.5.2	Analysis Program Output	16
5.6	Computer System	18

TABLE OF CONTENTS (Continued)

6.	LIMITATIONS AND OTHER USAGE	20
6.1	Limitations.....	20
6.2	Usage on Other Types of Systems	21
6.3	EASY4, EASY5(CE), EASY5, and EASY5x	21
APPENDIX A	SAMPLE EASY INPUT AND OUTPUT	23
FIGURE 1	ECS Development Approaches.....	7
FIGURE 2	EASY Program Organization.....	12
FIGURE 3	Sample ECS Flow Schematic as Model Generation Program Output	17
FIGURE A1	Simple Flow Schematic of Air Cycle Machine.....	24
FIGURE A2	Sample Model Generation Program Input	24
FIGURE A3	Sample Model Generation Program Output of Analysis Program Input	25
	Requirements	
FIGURE A4	Sample Analysis Program Input.....	27
FIGURE A5	Sample Analysis Program Steady-State Output.....	28
FIGURE A6	Sample Nonlinear Analysis Output Plots	29
FIGURE A7	Sample Bode Plot Output.....	30
TABLE 1	Results From EASY ECS Analysis.....	11
TABLE 2	Types of EASY Standard Components	13
TABLE 3	Model Generation Program Input Content.....	14
TABLE 4	Analysis Program Input Content.....	15
TABLE 5	Model Generation Program Output	16
TABLE 6	Analysis Program Output	18
TABLE 7	Core Requirements.....	19
TABLE 8	Difference Between EASY4, EASY5(CE), EASY5 and EASY5x	22

1. SCOPE:

The Engineering Analysis SYstem (EASY) computer program is summarized in this report. It provides techniques for analysis of steady-state and dynamic (transient) environmental control system (ECS) performance, control system stability, and for synthesis of optimal ECS.

General uses of a transient analysis computer program for ECS design and development, and general features of EASY relative to these uses, are presented. This report summarizes the nine analysis options of EASY, EASY program organization for analyzing ECS, data input to the program and resulting data output, and a discussion of EASY limitations.

Appendices provide general definitions for dynamic analysis, and samples of input and output for EASY.

1.1 Purpose:

A generalized computer program for determining transient thermodynamic performance of aircraft ECS, and methods for dynamic analysis of aircraft ECS are discussed in this report.

2. REFERENCES:

The following publications form a part of this document to the extent specified herein. The latest issue of SAE publications shall apply. The applicable issue of other publications shall be the issue in effect on the date of the purchase order. In the event of conflict between the text of this document and references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

2.1 SAE Publications:

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

2.1.1 AIR1706 The Advanced Environmental Control System (AECS) Computer Program for Steady-State Analysis and Preliminary System Sizing

2.1.2 SAE 881001 J.F. Defenbaugh, W.S. Heglund and A.L. Markunas, A Dynamic Model for Vapor Cycle Cooling Systems

2.2 Other References:

2.2.1 A. J. P. Lloyd, et al, Environmental Control System Transient Analysis, 4 Volumes, AFFDL-TR-77-102, October 1977.

2.2.2 G. S. Duleba, Application of the EASY Dynamic Analysis Program to Aircraft Environmental Control Systems - Reference Guide, AFFDL-TR-77-103, October 1977.

2.2.3 G. S. Duleba, et al, Experimental Verification of ECS Dynamics Computer Program, AFFDL-TR-77-104, October 1977.

- 2.2.4 A. J. P. Lloyd and V. K. Rajpaul, Dynamic Analysis Environmental Control Systems the "EASY" Way, ASME Paper 77-ENAs-6, July 1977.
- 2.2.5 H. E. Petersen and F. J. Sausom, MIMIC - A Digital Simulator Program, Air Force Document SESCO Internal Memo 65-12, May 1965.
- 2.2.6 J. Chi, Vapor Cycle (VCS) Transient and Steady-State Analysis Computer Program, AFWAL-TR-81-3143, October 1981.
- 2.2.7 G. S. Duleba, EASY Vapor Cycle Dynamic Analysis, AFWAL-TR-84-3082, October, 1984.
- 2.2.8 C. L. West, B. R. Ummel, and R. F. Yurczyk, Analysis of Ejection Seat Stability Using EASY Program, 2 Volumes, AFWAL-TR-80-3014, September 1980.
- 2.2.9 EASY5x is a commercial product available from Boeing Computer Services (Telephone number 1-800-426-1443).
- 2.3 Definitions:
 - 2.3.1 ANALYSIS PROGRAM: The Analysis Program is that part of EASY which performs the ECS transient analysis.
 - 2.3.2 BODE PLOT: A Bode plot presents system frequency response data plotted in rectangular coordinate form. The magnitude ratio (output-to-input) and phase angle (time relationship of output-to-input) are plotted against frequency of a change in input.
 - 2.3.3 EIGENVALUES: Eigenvalues are the roots (or solution parameters) of a system's characteristic equation. The roots are complex numbers, with a real and an imaginary part.
 - 2.3.4 EIGENVALUE SENSITIVITY: Eigenvalue sensitivity is a quantitative measure of the change in system eigenvalues for a given change in the magnitude of a design parameter.
 - 2.3.5 EASY: Engineering Analysis SYstem computer program. (References 1 and 4.)
 - 2.3.6 FILE MAINTENANCE PROGRAM: The File Maintenance Program is that part of the EASY program which is used to load component models or to modify the standard component models.
 - 2.3.7 FREQUENCY RESPONSE: Frequency response refers to the steady-state response of a system to a sinusoidal input of fixed amplitude.
 - 2.3.8 FUNCTION SCAN: Function scan is a feature of the EASY program that provides a graphic output of algebraic functional relationships or of tabulated data input by a user.
 - 2.3.9 GAIN MARGIN: The gain margin is the factor by which the loop gain must be multiplied, for a system to reach the stability boundary.
 - 2.3.10 KALMAN FILTER: The Kalman filter is an optimal estimator or filtering technique for estimating the state of a linear system.

2.3.11 **LAPLACE TRANSFORM:** The Laplace transform is a mathematical relationship that is used to transform a function from the time domain to a transformed domain.

2.3.12 **LINEAR OR NONLINEAR ANALYSIS:** Nonlinear systems may be analyzed by using a linear approximation of the nonlinear equations about a specific point, or by using a number of digital computer techniques available for solving nonlinear differential equations.

2.3.13 **LINEAR AND NONLINEAR DIFFERENTIAL EQUATIONS:**

$$c_0 \frac{d^n x}{dt^n} + c_1 \frac{d^{n-1} x}{dt^{n-1}} + \dots + c_{n-1} \frac{dx}{dt} + c_n x = f(t) \quad (\text{Eq.1})$$

is linear if there are no products or nonlinear functions of the dependent variable x or its derivatives. Examples of nonlinear differential equations are:

$$\frac{d^2 x}{dt^2} + \frac{dx}{dt} + x^3 = 0 \quad (\text{Eq.2})$$

$$\frac{dx^3}{dt} = 0 \quad (\text{Eq.3})$$

$$\frac{d^2 x}{dt^2} + x \frac{dx}{dt} + x^2 = 0 \quad (\text{Eq.4})$$

2.3.14 **LINEAR REGULATOR:** A linear regulator is a controller which can be implemented using only linear differential and algebraic equations.

2.3.15 **MODEL GENERATION PROGRAM:** The Model Generation Program of EASY assembles the ECS by organizing standard components or new components, and components interconnections, based on user inputs.

2.3.16 **NICHOLS PLOT:** A Nichols plot is the logarithm of the output-to-input magnitude ratio plotted against the phase angle, as the frequency of a sinusoidal input is varied.

2.3.17 **NYQUIST PLOT:** The Nyquist plot provides magnitudes and phase relationships (in polar form) between system input and response for any excitation frequency.

2.3.18 **OPTIMAL CONTROL:** Optimal control is when the values of the control parameters (transfer function) are chosen such that a selected performance index is maximized (or minimized).

2.3.19 **PHASE ANGLE:** Phase angle is a measure of how a system's output response lags or leads a sinusoidal input to the system.

2.3.20 **ROOT LOCUS ANALYSIS:** The root locus analysis is a graphical procedure for determining all possible roots of the characteristic equation for a control system.

- 2.3.21 **SYSTEM CHARACTERISTIC EQUATION:** The characteristic equation is the denominator of the system transfer function.
- 2.3.22 **STABILITY MATRIX:** A stability matrix is the eigenvalues of a system about an operating point.
- 2.3.23 **STANDARD COMPONENTS:** Standard components, in the EASY computer program, are subroutines which define dynamic performance relations of ECS components and controls, dynamic performance relations of general basic controls, and miscellaneous analytical functions.
- 2.3.24 **STATE VARIABLES:** State variables are variables which completely describe the behavior of a dynamic system.
- 2.3.25 **TRANSFER FUNCTION:** The transfer function for any component or system is defined as the ratio of the Laplace transform of the output to the Laplace transform of the input.

$$\text{Transfer Function Form} = \frac{a_1s + b_1}{a_2s^2 + b_2s + c_2} \quad (\text{Eq.5})$$

3. BACKGROUND ON COMPUTERIZED TRANSIENT ECS ANALYSIS:

Computerized ECS analysis techniques can improve ECS design and development, and reduce overall ECS development costs.

The evolution of an aircraft ECS - from concept, to design and development, to production - is a significant investment in manpower, resources, and time. An initial phase in the design and development of an ECS involves the following three tasks:

- a. Definition of system components to meet aircraft requirements
- b. Development of components to meet system performance
- c. Development of controls for desired system operation (see Figure 1)

Use of an ECS "breadboard" lab, for prototype component and system development, could aid these tasks. This lab contains various ECS components: an air supply at variable pressure, temperature, and flow, and load "banks" to simulate cabin, electronics cooling, defogging, and other types of ECS loads. With the use of this "breadboard" lab, a prototype ECS is "connected" for development testing. New concepts are tried, various control schemes are investigated, and design performance is demonstrated. This "breadboard" lab significantly reduces ECS development costs.

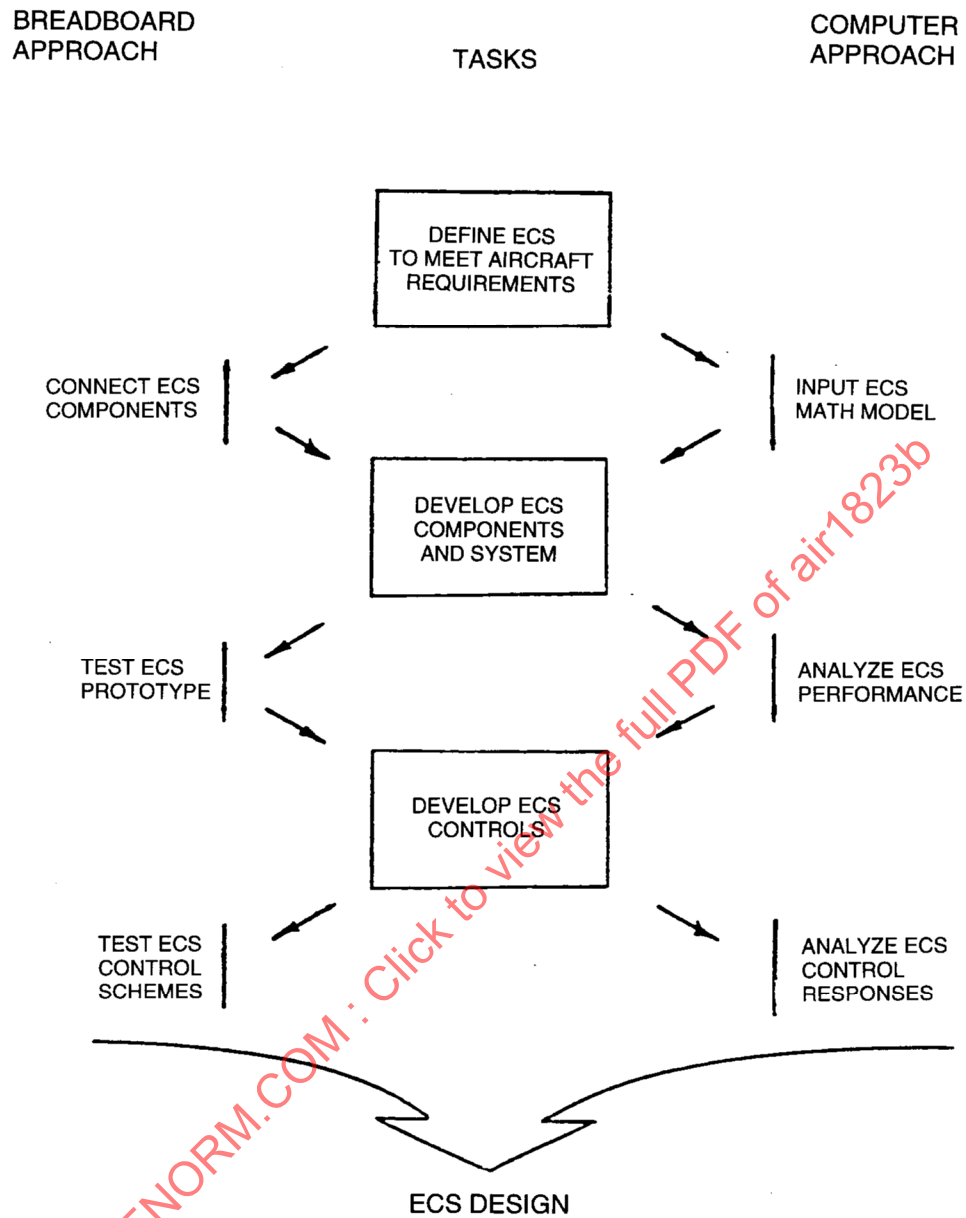


FIGURE 1 - ECS Development Approaches

3. (Continued):

Generalized ECS "breadboard" labs are not available, but the process can be simulated by computer analysis (see Figure 1). Computer simulation of the ECS is a type of "breadboard" lab. ECS components, air supplies, and heat loads exist as mathematical models. The prototype ECS is defined with computer instructions. Pressures, temperatures, humidities, and flows at various locations in the system are computer input. Results are similar to those achieved in the hypothetical ECS "breadboard" lab. New concepts can be tried, various control schemes can be investigated, and transient and steady-state performance can be demonstrated much faster and easier, with less risk, than using prototype hardware.

The EASY transient analysis computer program is one technique for simulating the dynamic performance of aircraft environmental control systems. Other techniques are analog computers, general purpose simulation languages (Reference 2.2.5), and special purpose ECS dynamic analysis programs. Analog computers and general purpose simulation languages require considerable effort by the analyst to model an ECS. Special purpose ECS dynamic analysis programs often are designated "company proprietary" and are not available for general use. EASY is a general analysis program which can be applied readily to many different ECS. Its availability is defined in 5.6. It has application to other types of systems also (see 6.2).

Development of this computer program initially was sponsored by the U.S. Air Force Flight Dynamics Laboratory (see References 2.2.1, 2.2.2, 2.2.3, and 2.2.4). An early version of the EASY computer program is available from the U.S. Air Force and later proprietary versions are available commercially.

4. GENERAL FEATURES OF EASY:

The EASY computer program is a potentially effective analytical capability that can be an integral part of the overall design and development of ECS. Some key analytical capabilities of EASY and salient aspects for its use are summarized. Further comments about use of EASY are provided in Section 5.

4.1 Analysis Capabilities:

The EASY computer program can be used to evaluate the operation of existing ECS, to define and evaluate controls for new ECS, and for control changes to existing ECS. The dynamic operation of existing ECS due to programmed or unplanned changes (e.g., part failure, out-of-tolerance controller, etc.) at any normal steady operating condition, can be determined. EASY can be used to define the operating logic of ECS controller schemes, and to determine controller gains that assure system stability. Simulations for portions of a total ECS (i.e., which can be isolated easily), or details of a complete ECS can be modelled analytically.

Most types of aircraft ECS can be analyzed. This includes air cycles (simple and bootstrap), vapor cycles, open and closed loop systems, heat transport loops, liquid heat sinks, and pressurization systems. Analysis capability for vapor cycles is a later addition (References 2.1.2, 2.2.6, and 2.2.7). Due to the time and cost involved in using EASY, it should be used very prudently. For example, it may not be cost effective to use this program for routine system comparisons or trade studies, or for complex multiple loop systems.

4.1 (Continued):

System configuration is defined with a set of "standard components" from the EASY ECS library and interconnections between the components. Special components can be defined by FORTRAN statements, if the standard components are not appropriate.

EASY allows simulation of dynamic responses and control systems described by nonlinear differential equations. Unique features of EASY are its flexible and efficient nonlinear simulation capability and a comprehensive set of control analysis techniques. EASY combines these in an integrated program - allowing both types of analysis to be performed using the same system model data.

Nine types of thermodynamic and control dynamic analyses can be conducted. Data needed for these analyses include numerical values defining ECS components characteristics and system boundary conditions (e.g., initial conditions). A single FORTRAN model, compatible with all analysis options, is defined by the program.

Other program capabilities are as follows:

- a. Program inputs are simple codes to connect discrete elements with built-in techniques (these techniques represent the performance and functions of aircraft ECS components)
- b. Definitions of ECS control functions can be simple and generalized, or detailed, or both
- c. Six nonlinear dynamic analysis techniques are available
- d. Message codes are provided as cautions about errors in input
- e. Engineering problems that can be modelled by differential equations with variable or constant coefficients can be analyzed
- f. The transient response of a complete ECS, or of a part of an ECS, can be obtained

4.2 Usage Aspects:

EASY is a large, complex computer program. It can be operated on CDC/CYBER, IBM, or DEC VAX computers. It can also be operated on interactive engineering workstation computers. Means for rapid troubleshooting of errors are provided, but may be limited by the machine being used.

A general background on control dynamics is suggested for users. One approach is a combined effort of a controls analyst and an ECS engineer. Difficulty in obtaining solutions may occur, and some skill (and art) may be required to obtain solutions. Initial use may need to be discussed with an experienced user.

The EASY computer program can be applied to several types of environmental control system analyses. Typical applications are:

4.2 (Continued):

- a. Detailed stability and transient response of an ECS component or subsystem
- b. Transient response of a complete ECS, with less detail than in (a)
- c. Cabin cool-down and warm-up
- d. Transient thermal responses of avionic equipment
- e. Cabin and avionics cooling performance adequacy during aircraft transient maneuvers

Predicted results are only as good as the models defined with EASY. EASY mathematical models are approximations to real ECS. Simulation using EASY does not provide answers to all system questions, but it should provide key data regarding fundamental system performance.

5. EASY COMPUTER PROGRAM:

The EASY computer program is designed to model mathematically the dynamic performance of most aircraft ECS. In general, ECS performance is mathematically described by a system of first order nonlinear differential equations in terms of state variables (a math model). This set of state equations can be arranged with the time derivative term on the left hand side (the derivative of the state variable), and the state variables and inputs on the right hand side. In EASY, the state equations are integrated by a suitable method, and a complete description of system performance as a function of time - the transient solution - is obtained.

The EASY program contains options to linearize the system of equations and to obtain steady-state solutions. Steady-state is a limit solution with time approaching an infinite value. A linear solution is obtained by linearization of the equations about some operating point. Steady-state¹ is for system analysis in an initial design phase. Linear approximation analysis (linearization) is useful for more detailed system modeling, such as classical frequency response analyses. Full simulation, by solving the nonlinear equations, is the highest level of transient analysis for investigation of system transient responses.

The latest version of this program, EASY5x, has a graphical user interface that improves the ease of use by eliminating the need to develop models and analysis methods.

Program solution techniques, program organization, use, and input and output are summarized herein.

¹ Although EASY can be used for steady-state analyses, other programs which are intended only for steady-state analysis may be more efficient (e.g., see 2.1.1).

5.1 History of Program:

Development of the EASY ECS computer program was sponsored by the U.S. Air Force, and was completed in July 1977 (see 2.2.1 and 2.2.2). Experimental verification of the program was completed at the same time (see 2.2.3). Development of additional components for the analysis of vapor cycle systems are available (see 2.2.6 and 2.2.7). Improved analytical capabilities and a Window version have also been developed and are available commercially.

5.2 EASY Program Capabilities:

The nine ECS solution techniques of the EASY program, and a summary of results obtained from their use are provided in Table 1.

TABLE 1 - Results From EASY ECS Analysis

Analysis	Results
1. Steady-State	ECS thermodynamic performance at single or multiple conditions
2. Nonlinear	Time response of ECS
3. Linear	Degree of ECS control stability or instability
4. Stability Margin	Regions of stable ECS operation
5. Transfer Function	Variation or response of ECS output for specified input
6. Root Locus	Locus of ECS solution parameters, to determine better values
7. Eigenvalue Sensitivity	Sensitivity of ECS stability to changes of specified parameters; or identification of critical ECS parameters
8. Function Scan	Graphical presentation of tabular ECS input data
9. Optimal Controller	"Good" control configuration for an ECS

5.3 Program Organization:

The EASY computer program contains three subprograms. These are the Model Generation Program, the Analysis Program, and the File Maintenance Program. Relations between these sub-programs, data input and output, and data files are shown in Figure 2.

- 5.3.1 Model Generation Program: The Model Generation Program prepares descriptive information and FORTRAN source codes for the ECS model, using input data which functionally describe the ECS. The FORTRAN codes are a series of calls to subroutines describing various ECS components.

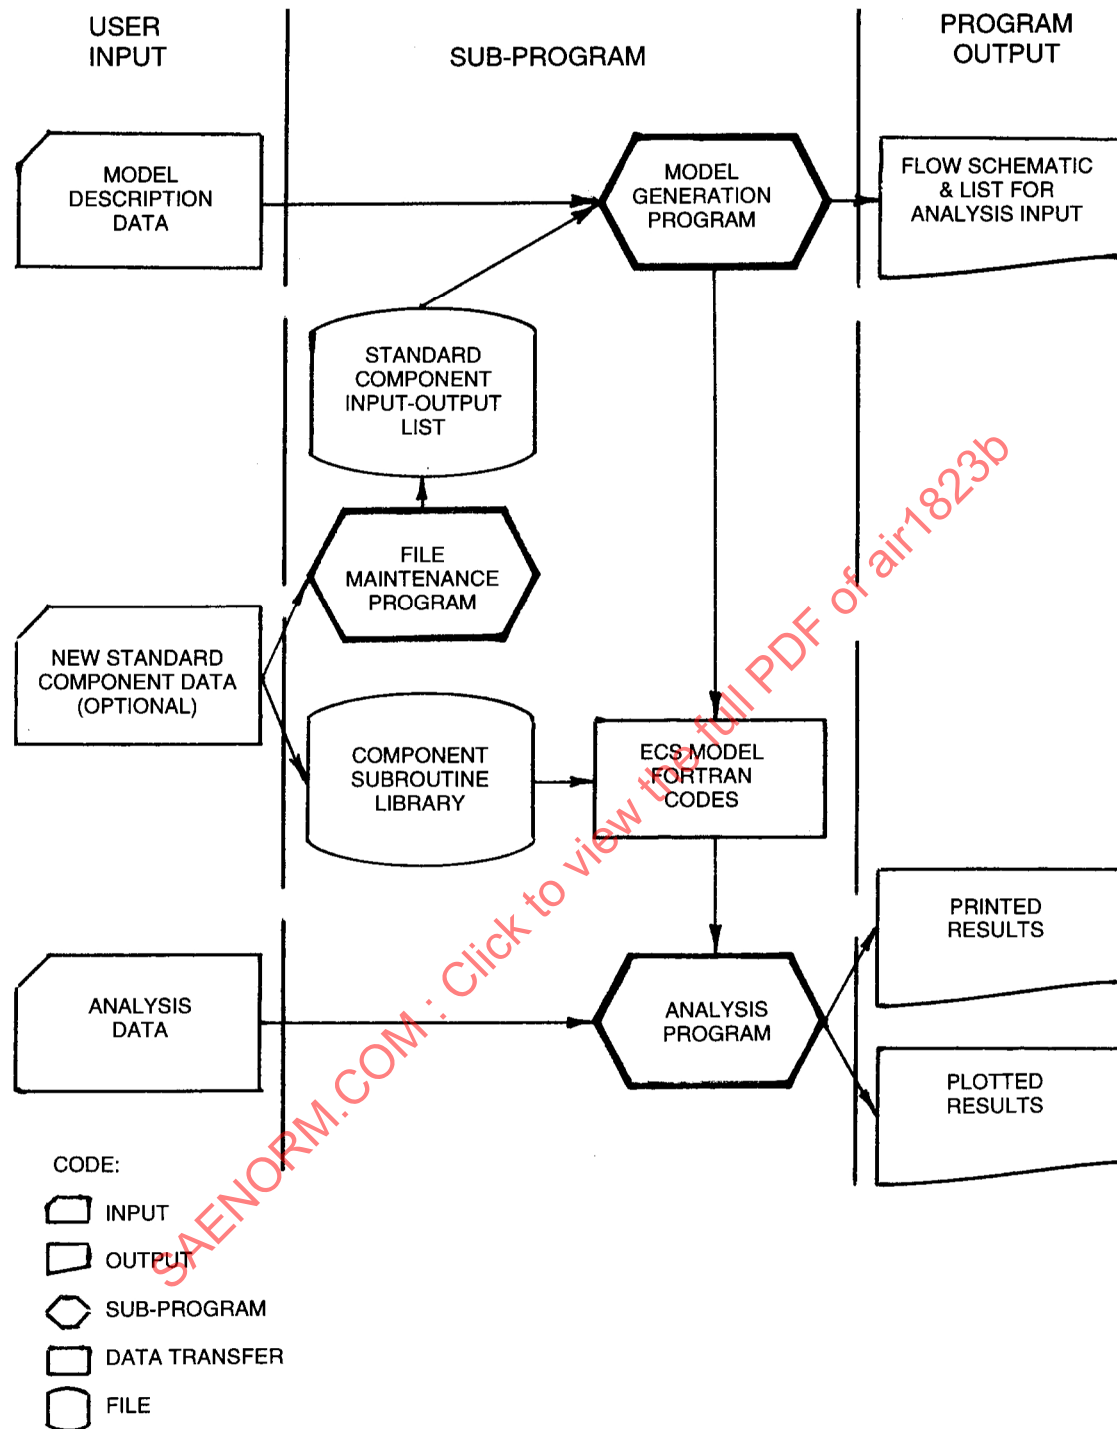


FIGURE 2 - EASY Program Organization

5.3.1 (Continued):

The model description input are commands which describe how standard component subroutines are interconnected to define the ECS flow system schematic to be analyzed. Inputs from components to other connected components are specified by commands in a specified EASY format. Standard component subroutines include general performance analysis methods for ECS components, control elements, and miscellaneous functions. (See Table 2 for short summary of component types.) These are available in the EASY subroutine library. If an ECS cannot be modeled with existing standard components, new component subroutines can be defined and included in the model description by appropriate FORTRAN statements, or the new standard components subroutines may be added to the library of existing ones.

The EASY Model Generation program generates a schematic flow diagram of the ECS model. The flow schematic shows interconnections between standard components, and input and output data (e.g., temperatures, pressures, humidities) that are common at each interconnection. The schematic is produced on the lineprinter. It provides a rapid graphic check on the program's interpretation of the model description.

The Model Generation Program produces a list of input data that is required by each component to complete the model description. These data are used in the Analysis Program. Both scalar parameters and tabular data are included in this list. The Analysis Program assumes that any quantity not supplied by another component will be supplied as a fixed parameter by the input. Thus, items in the input data list may reveal a connection that was omitted from the ECS model description.

The Model Generation Program also generates a subroutine to load tabular data required by the model for the Analysis Program.

TABLE 2. Types of Easy Standard Components

Air cycle refrigeration components
Vapor cycle refrigeration components
Ducting components
ECS control components
Generalized controllers
Generalized transfer functions
General analytical and miscellaneous functions

5.3.2 Analysis Program: The EASY Analysis Program has options for several different dynamic, linear, or nonlinear analysis techniques, and for synthesis of optimal linear controllers.

The Analysis Program provides options for application of the analysis technique considered to be best suited to a particular problem. Several different ECS models (i.e., linear model, steady-state model) do not need to be generated.

The Analysis Program uses the FORTRAN codes describing the ECS model and numerical values for the items defined in the input data list by the Model Generation Program. Output can be in optional printed formats determined for the analysis technique used, and in many cases as plotted results.

5.3.3 File Maintenance Program: The File Maintenance Program is used to modify and to load new standard component input and output descriptions onto a permanent file. This program is used only when it is necessary to modify the input, output, or table list of an existing standard component, or when a new standard component is to be added to the system.

5.4 Problem Input:

Two input files normally are required for EASY use. These are for the Model Generation Program and for the Analysis Program. The third input file, for the File Maintenance Program, is not needed for all analyses. Sample input for the Model Generation Program and the Analysis Program are provided in Appendix A.

5.4.1 Model Generation Program Input: Model Generation Program input consists of command statements, descriptive ECS data, and additional FORTRAN statements as user options. This input information is summarized in Table 3. Sample Model Generation Program input is presented in Appendix A.

TABLE 3 - Model Generation Program Input Content

Command Statements (As Appropriate)	
Input data identification	
Input data requests	
System Data	
Components:	2-letter codes for ECS components
Locations:	Where ECS components are located on an output schematic
Interconnections:	Component name and position where connection comes from
	Position where inlet connection is made
FORTRAN Statements (Optional)	
Additional ECS model features	
Nonstandard component data	

- 5.4.2 Analysis Program Input: Analysis Program input consists of command statements, and coded and numerical data lists. (See Table 4.) The types of input data required to define specific details for each ECS component are output by the Model Generation Program, as an aid in preparing Analysis Program input.

Command statements identify each data item being input; they specify analysis types being requested; and they define output formats desired for each analysis. There are command statements for each of the nine analysis types discussed in 5.2. Command statements also provide for:

- a. Definition of parameter, rate, state, and variable names
- b. Initialization of conditions, operating points, and initial time values
- c. Definition and control of lineprinter, punch, and plotter output
- d. Input of table data
- e. Specification of titles for plotted data
- f. Format for output of punched, printed, and plotted data

A sample Analysis Program input list is provided in Appendix A.

TABLE 4 - Analysis Program Input Content

Command Statements (As Appropriate)

Input data identification
Analysis type requests
Output format requests

Data

Tabular
Parameter values
Initial conditions for ECS model
State variables

5.5 Program Output:

The EASY program produces lineprinter output from the Model Generation Program; and lineprinter plotted output from the Analysis Program. Only time histories and steady-state scan graphics are available with lineprinter plots. The generation of plotted output requires use of specialized software (which is not part of the EASY program).

- 5.5.1 Model Generation Program Output: Some forms of data are always output by the Model Generation Program, and some are output per user option. These are summarized in Table 5.

TABLE 5 - Model Generation Program Output

Always Output	
Input listing Input command list Warning messages (when applicable)	
Optional Output	Description
ECS flow schematic	Simple line printer schematic of system being modeled, to enable user to identify errors in the model description. See example, Figure 3.
Identification of data needed for analysis program	Includes data requirements such as tables, parameters, and initial conditions for state variables. See sample output, Appendix B.
Listing of subroutine calling standard components	Listing of subroutine EQMO which defines equations used in the analysis program.
Listing of subroutine setting data accessed by analysis program	Listing of subroutine DATAIN, which sets the number of states, variables, and parameters that are accessed by the analysis program.

- 5.5.2 Analysis Program Output: Analysis Program output is unique for each of the nine types of analyses (see 5.2). Two general types of data or information also may be output by the Analysis Program. One is a graphical output of all tabular data. This provides a convenient visual check of input data. (See Appendix A for a sample of this output.) The second is output if the Analysis Program encounters difficulty in interpreting analysis instructions or in performing analysis, and warning messages are provided. A summary of Analysis Program output is provided in Table 6.

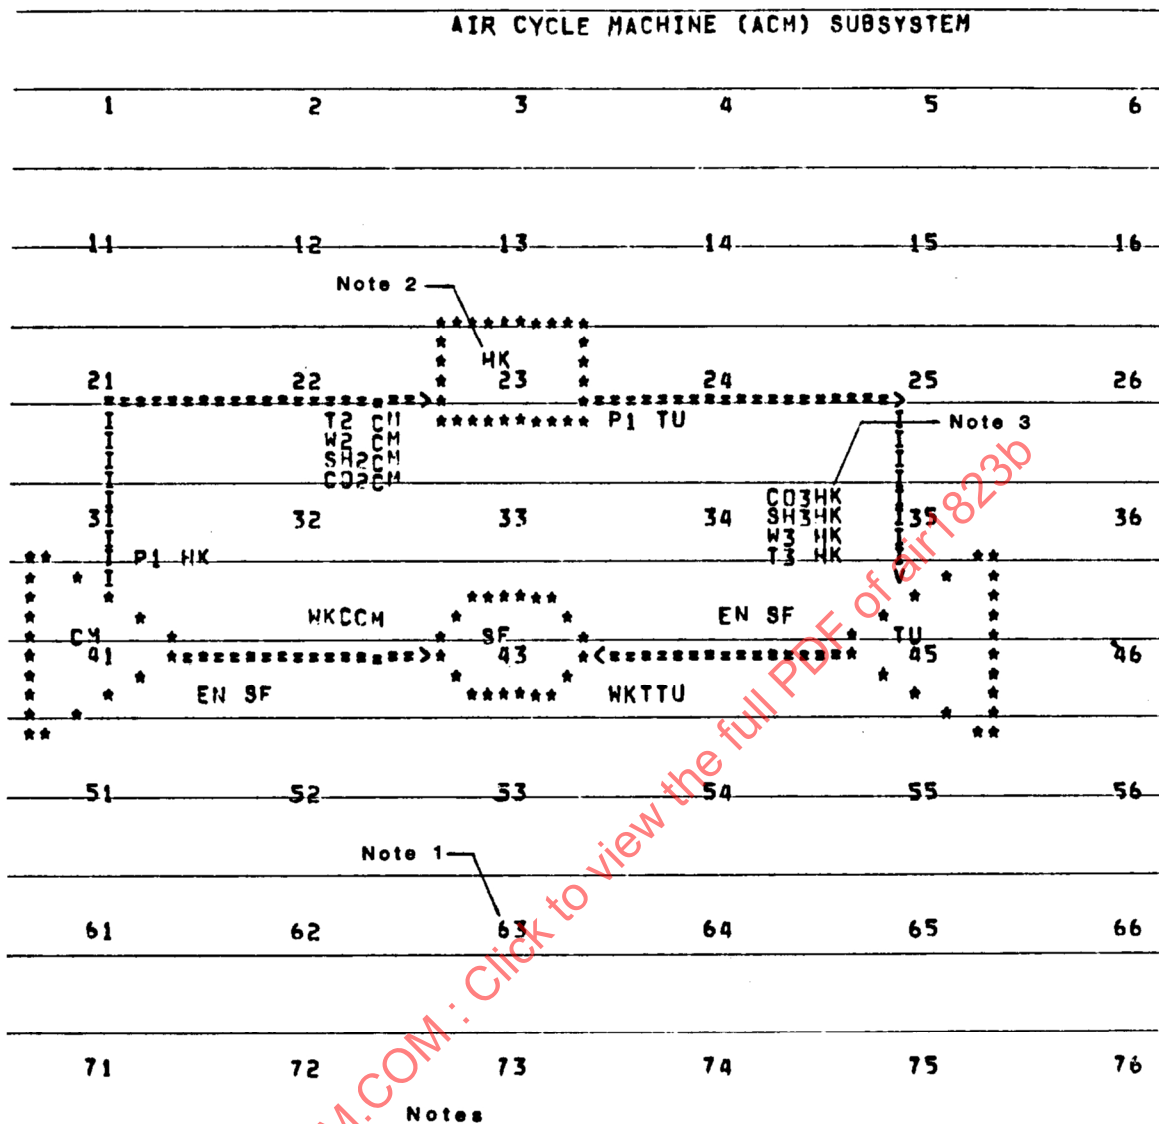


FIGURE 3 - Sample ECS Flow Schematic as Model Generation Program Output

TABLE 6 - Analysis Program Output

Analysis Type	ECS Output Data	Available Output Format
Steady-state	State conditions Rates Parameter values Variable values	Lineprinter Plots
Nonlinear	ECS parameters versus time	Lineprinter Plots
Linear	State variables and derivatives Stability matrix Eigenvalues	Lineprinter
Stability margins	Parameter limits Natural frequencies	Lineprinter
Transfer functions	Frequency response functions	Lineprinter Bode plot Nichols plot Nyquist plot
Root locus	Root locus	Lineprinter Plots
Eigenvalue sensitivity	Eigenvalues and sensitivity measures	Lineprinter
Function scan	Graphical forms of functional relations	Plots
Optimal controller	Controller gain arrays Sensor arrays Stability matrix arrays Criteria arrays	Lineprinter Punch cards

5.6 Computer System:

The EASY Computer program is written in FORTRAN IV language. It can be operated on the CDC/CYBER family of computers (6600, 760, and 176), or on the IBM or DEC VAX computers. It can also be operated on interactive engineering workstation computers. Core requirements are a function of model size and use of the optimal controller synthesis capability. Typical core requirements (Octal) are provided in Table 7.

Execution times are very dependent on model size and on the type of analyses that are run.

TABLE 7 - Core Requirements

Model Size (No. of States)	Analysis Only	With Optimal Controller Synthesis
10	120K	140K
30	170K	230K
50	200K	300K

5.6 (Continued):

Two early versions of the EASY computer program that were written in Fortran IV language, namely EASY4 and EASY5(CE), are available from the United States Air Force (ASC/ENFAF, Wright-Patterson AFB, Ohio 45433-7809). A blank computer tape should accompany all requests for the program. Requests from a foreign country must be sent through that country's embassy in Washington, DC.

EASY5x is an X Window version of the EASY5 Engineering Analysis System. The software is particularly well suited to modeling large, complex, continuous and/or multi-rate digital systems characterized by algebraic, linear or nonlinear differential, and/or difference equations. EASY5x is written in C, and the EASY5 background code is written in Fortran 77. EASY5x is supported on the following platforms: Hewlett Packard Apollo 400 series, Hewlett Packard 9000/700 series, Sun SPARC series, Silicon Graphics PersonalIris/Power Series/Indigo, Digital Equipment DEC station family, and the IBM RS6000 family. In addition, the EASY5 background code is available for Cray Y-MP systems and Convex C2xx series machines.

EASY5x is supplied with several libraries that contain pre-defined and thoroughly debugged components. These libraries are:

- General Purpose (106 components)
- Air Vehicle (8 components)
- Environmental Control (40 components)
- Hydraulic (37 components)
- Vapor Cycle (10 components)

Assembling a complex model using the EASY5x graphics interface and the standard libraries becomes a simple process of selecting the correct components and connecting them in the correct order. If a given application area requires a different set of components, a user can design and debug his/her own components. This expands the libraries available to EASY5x and allows reuse of these components within the application area.

6. LIMITATIONS AND OTHER USAGE:

Users of the EASY computer program must be aware of its limitations. Suggested improvements to the program, and other uses and variations of EASY also are presented.

6.1 Limitations:

The EASY program has the following limitations.

- a. Equations representing ECS performance must be in state variable form (i.e., they must consist of a set of explicit first order equations).
- b. The practical upper limit of model size is approximately 75 state variables. It is desirable to limit model size to less than 40 state variables to avoid excessive computer costs.
- c. Convergence of a steady-state analysis is not guaranteed. Normal rules for solutions to nonlinear equations apply. For example, avoid discontinuities and make reasonable estimates of initial conditions.
- d. Specific limits on EASY input are 100 component identifiers per model; 50 tables per model; and 10 optimal controller inputs, outputs, or criteria.
- e. Some closed loop systems with inherent implicit loops are difficult to analyze due to the EASY program structure.
- f. The IBM version of EASY is not fully operational at present. Software changes to the original CDC/CYBER version were required for use on IBM and DEC VAX computers.

The EASY5x program has the following limitations.

- a. Specific limits on EASY5x input are 1000 components, 400 tables, and less than 10,000 total states per model.
- b. The steady-state finder is robust, but requires a reasonable estimate of the initial conditions of the states. Since it is solving nonlinear equations, a solution may be found that does not correspond to physical reality.
- c. Implicit loops in the model are not permitted. EASY5x diagnostics enable the user to locate and remove all model implicit loops before starting analysis.

6.2 Usage on Other Types of Systems:

The EASY computer program has been applied to other systems as indicated below:

- a. Aircraft and missile simulation and control
- b. Power plant modeling and control
- c. Passenger vehicle dynamic performance assessment
- d. Chemical process simulation and control
- e. Electrical power distribution stability
- f. Servo designs for tape drives, machine tools, pointing systems
- g. Game animal population dynamics and control
- h. Instrumentation compensation design
- i. Aircraft arresting systems
- j. Aircraft hydraulic systems

6.3 EASY4, EASY5(CE), EASY5, and EASY5x:

There are several versions of the EASY computer program. EASY4 is the original EASY program. EASY5(CE) is an improved version of EASY which was used for analysis of ejection seat stability for a Crew Escape system (see 2.2.8). These two versions are available from USAF. The EASY5 version is a proprietary program available commercially. The most current version is the EASY5x which can be executed on computers running Unix and X Window compatible operating systems.

There are two significantly new capabilities in EASY5, which are not in EASY4 or in EASY5(CE). One is enhanced capabilities for Optimal Control Design, and the second is the Macrocomponent capability. The latter allows reduction in the number of states for new components. Other differences between the three EASY versions are indicated in Table 8.

EASY5x conforms to the Standard known as Motif which provides a consistent look and feel to programs which include a graphical user interface. Using a series of pull-down menus, on-screen push buttons, and fill-in-the-blank data forms, EASY5x guides the user through all aspects of model construction and analysis, without the user having to enter a single command. Table 8 compares the capabilities of EASY5x to its predecessors. In addition, there are several significant new capabilities. EASY5x allows users access to their System Symbolic Debugger during an analysis. The System Symbolic Debugger is a very powerful tool for finding and correcting modeling errors. An interactive plotting and an interactive simulation capability are now standard. These tools simplify the construction and verification of a dynamic model.

TABLE 8 - Difference Between EASY4, EASY5(CE), EASY5, and EASY5x

Capability	EASY4	EASY5(CE)	EASY5	EASY5x
1. Fully integrated FORTRAN components	No	Yes	Yes	Yes
2. Optimal controller improvements	No	No	Yes	Yes
a. FORTRAN connections				
b. Frozen states				
c. Real Eigenvalue limit				
3. Discrete analysis	No	Old algorithm	Yes	Yes
4. Vector/matrix capabilities	No	Yes	Yes	Yes
5. Macro components	No	No	Yes	Yes
6. Vector components	No	Yes	Yes	Yes
7. Linear model generation	No	No	Yes	Yes
8. Linear model reduction	No	No	Yes	Yes
9. Three dimensional tables	No	Yes	Yes	Yes
10. Transfer function zeroes	No	Old algorithm	Yes	Yes
11. Complete printer plots	No	No	Yes	Yes
12. Auxiliary input files	No	Yes	Yes	Yes
13. Debug feature	No	Yes	Yes	Yes
14. Alterable table storage	No	Yes	Yes	Yes
15. Secondary TINC, PRATE, OUTRATE, and print control	No	Yes	Yes	Yes
16. Calculate initial condition option	No	Yes	Yes	Yes
17. Suppress table printback option	No	Yes	Yes	Yes
18. Single pass through model	No	Yes	Yes	Yes
19. Graphical user interface	No	No	No	Yes

PREPARED BY SAE COMMITTEE AC-9,
AIRCRAFT ENVIRONMENTAL SYSTEMS

APPENDIX A SAMPLE EASY INPUT AND OUTPUT

Several samples of input to and output from the EASY Model Generation Program and Analysis Program are provided.

The sample EASY input and output are for a simply defined bootstrap air cycle ECS. A flow schematic of this ECS is provided in Figure A1. It represents air flow into a compressor, air flow from the compressor to a heat exchanger, and flow from the heat exchanger to a turbine. The compressor is shaft powered by the turbine. The EASY 2-letter codes for the four components also are noted in the figure.

A.1 MODEL GENERATION PROGRAM INPUT:

A sample Model Generation Program input for the bootstrap ECS and an additional feature about the air cycle machine (turbine driven compressor unit) are presented in Figure A2.

The first line of input, LIST STANDARD COMPONENTS, calls for a listing of all standard components.

Input lines 2 through 6 define the ECS model, where the four components are to be located on a lineprinter flow schematic output, and interconnections between components (identified as INPUTS). MODEL DESCRIPTION specifies the start of the ECS description input, followed by the title to be used on the lineprinter flow schematic.

The compressor symbol on the flow schematic output is to be located at position 041, the heat exchanger at position 023, and so on. The heat exchanger receives inputs from compressor output port location number 2, with a connection to the heat exchanger at inlet port number 1. The turbine receives inputs from heat exchanger port number 3, with a connection to turbine port number 1.

Lines 7 through 19 define an additional feature which cannot be modeled using standard components. Any unique limits on the analysis must be defined in the MGP input. These lines are FORTRAN statements to check whether the air cycle machine shaft speed (EN SF) exceeds a specified value (RPMLIM) corresponding to a machine failure. If this occurs in the Analysis Program, the analysis is terminated and a diagnostic message is output.

A.2 MODEL GENERATION PROGRAM OUTPUT:

A sample of Model Generation Program output providing a list of required input data for the Analysis Program is provided in Figure A3. This output gives coded alphanumeric data indicating type of tabular data needed for each component, the specific parameters for which values are required, and states for which initial conditions and error control values are needed. This output aids preparation of Analysis Program input.

A sample lineprinter flow schematic output of the bootstrap ECS is found in Figure 3.