

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
G

AS1039

FEDERAL SUPPLY CLASS
4730

RATIONALE

REACTIVATE MATERIALS. CORRECT SIZE 28 LEG LENGTH DIMENSIONS. UPDATE SPECIFICATION REFERENCE.


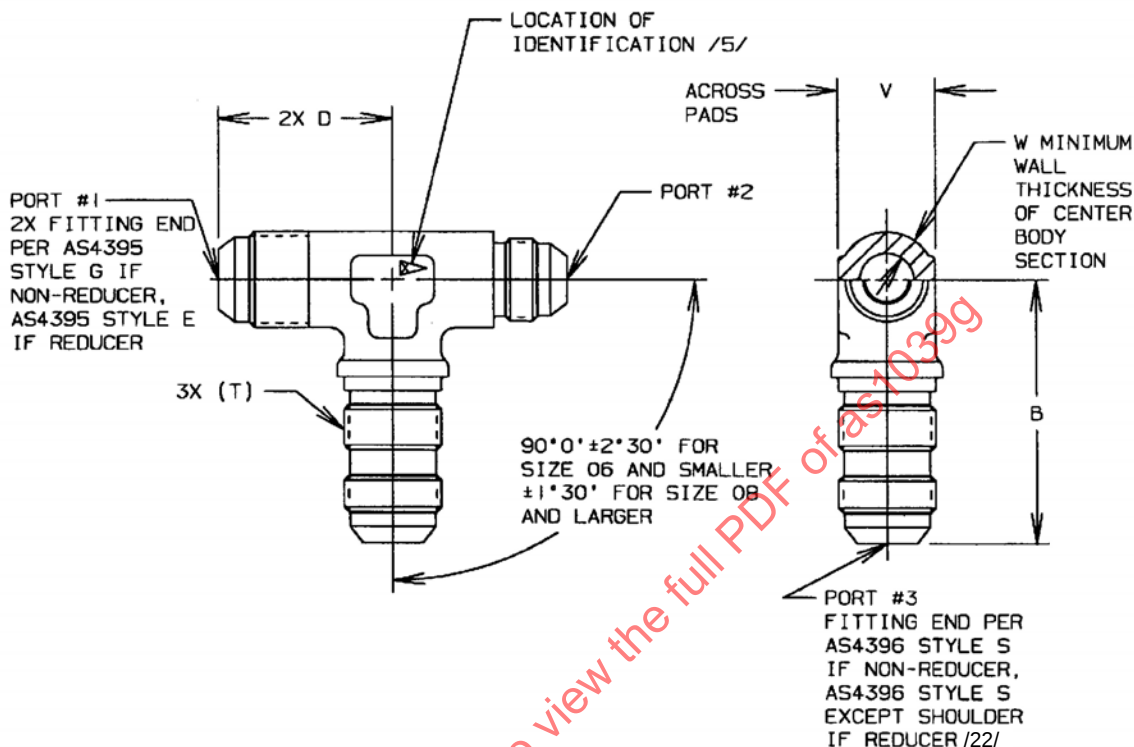


FIGURE 1 - FITTING, TEE, BULKHEAD END FOR OPTIONAL USE IN PORT
PORT #2 SHOWN AS REDUCER

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1039G>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS4841



AEROSPACE STANDARD

FITTING, TEE,
STANDARD AND REDUCER,
BULKHEAD ON SIDE, FLARED

AS1039
SHEET 1 OF 7

REV.
G


Copyright 2015 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1962-08 REVISED 2015-03

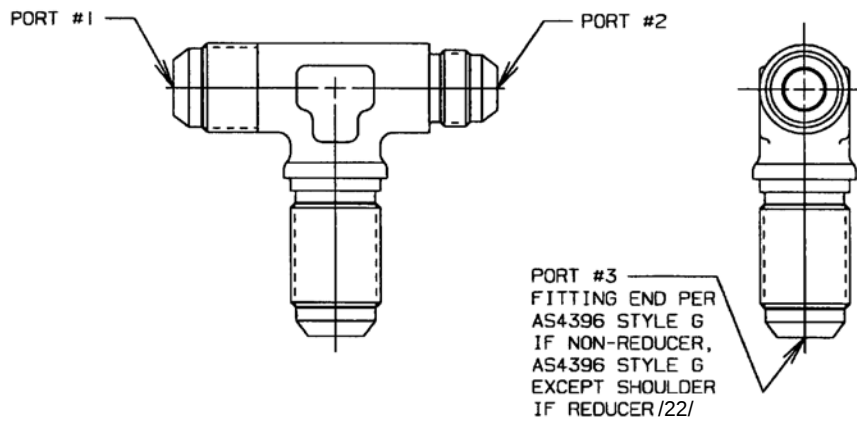

**FIGURE 2 - FITTING, TEE, BULKHEAD END NOT FOR USE IN PORT
PORT #2 SHOWN AS REDUCER
SAME AS FIGURE 1 EXCEPT AS SHOWN**

TABLE 1 - DIMENSIONS AND WEIGHTS /13/

BASIC NO. AS1039 /12/ /20/ SIZE CODE	V	W	LB/EA APPROX REF ALUM	LB/EA APPROX REF STEEL	LB/EA APPROX REF TI
02	.297 - .314	.090	.0172	.0494	.0273
03	.360 - .377	.100	.0242	.0696	.0384
04	.423 - .440	.110	.0333	.0954	.0527
05	.485 - .502	.120	.0421	.121	.067
06	.547 - .565	.120	.0530	.152	.084
08	.735 - .753	.150	.1152	.332	.183
10	.860 - .878	.170	.150	.431	.238
12	1.047 - 1.065	.185	.327	.780	.430
16	1.292 - 1.317	.205	.386	1.107	.611
20	1.605 - 1.630	.240	.634	1.82	1.01
24	1.855 - 1.880	.250	.833	2.39	1.31
28	2.238 - 2.263	.310	1.315	4.46	2.18
32	2.542 - 2.572	.350	1.83	5.24	2.89

TABLE 2 - LEG LENGTH B

FORGING SIZE /12/ 02	TUBE SIZE OF PORT #3 02	TUBE SIZE OF PORT #3 03	TUBE SIZE OF PORT #3 04	TUBE SIZE OF PORT #3 05	TUBE SIZE OF PORT #3 06	TUBE SIZE OF PORT #3 08	TUBE SIZE OF PORT #3 10	TUBE SIZE OF PORT #3 12	TUBE SIZE OF PORT #3 16	TUBE SIZE OF PORT #3 20	TUBE SIZE OF PORT #3 24	TUBE SIZE OF PORT #3 28	TUBE SIZE OF PORT #3 32
02	1.429	-	-	-	-	-	-	-	-	-	-	-	-
03	1.461	1.461	-	-	-	-	-	-	-	-	-	-	-
04	1.507	1.507	1.601	-	-	-	-	-	-	-	-	-	-
05	1.538	1.538	1.632	1.632	-	-	-	-	-	-	-	-	-
06	1.648	1.648	1.742	1.742	1.820	-	-	-	-	-	-	-	-
08	1.789	1.789	1.883	1.883	1.961	2.117	-	-	-	-	-	-	-
10	1.929	1.929	2.023	2.023	2.101	2.257	2.398	-	-	-	-	-	-
12	2.039	2.039	2.133	2.133	2.211	2.367	2.508	2.679	-	-	-	-	-
16	2.164	2.164	2.258	2.258	2.336	2.492	2.633	2.804	2.804	-	-	-	-
20	2.445	2.445	2.539	2.539	2.617	2.773	2.914	3.085	3.085	3.132	-	-	-
24	2.726	2.726	2.820	2.820	2.898	3.054	3.195	3.366	3.366	3.413	3.429	-	-
28	2.969	2.969	3.063	3.063	3.141	3.297	3.438	3.609	3.609	3.656	3.672	3.828	-
32	3.133	3.133	3.227	3.227	3.305	3.461	3.602	3.773	3.773	3.820	3.836	3.992	4.117

TABLE 3 - LEG LENGTH D

FORGING SIZE /12/ 02	TUBE SIZE OF PORT #1 OR #2 02	TUBE SIZE OF PORT #1 OR #2 03	TUBE SIZE OF PORT #1 OR #2 04	TUBE SIZE OF PORT #1 OR #2 05	TUBE SIZE OF PORT #1 OR #2 06	TUBE SIZE OF PORT #1 OR #2 08	TUBE SIZE OF PORT #1 OR #2 10	TUBE SIZE OF PORT #1 OR #2 12	TUBE SIZE OF PORT #1 OR #2 16	TUBE SIZE OF PORT #1 OR #2 20	TUBE SIZE OF PORT #1 OR #2 24	TUBE SIZE OF PORT #1 OR #2 28	TUBE SIZE OF PORT #1 OR #2 32
02	.851	-	-	-	-	-	-	-	-	-	-	-	-
03	.883	.914	-	-	-	-	-	-	-	-	-	-	-
04	.883	.905	.976	-	-	-	-	-	-	-	-	-	-
05	.937	.968	1.039	1.039	-	-	-	-	-	-	-	-	-
06	.993	1.024	1.095	1.095	1.101	-	-	-	-	-	-	-	-
08	1.158	1.189	1.260	1.260	1.266	1.367	-	-	-	-	-	-	-
10	1.260	1.291	1.362	1.362	1.368	1.469	1.570	-	-	-	-	-	-
12	1.373	1.404	1.475	1.475	1.481	1.582	1.683	1.789	-	-	-	-	-
16	1.482	1.513	1.584	1.584	1.590	1.691	1.792	1.898	1.945	-	-	-	-
20	1.669	1.700	1.771	1.771	1.777	1.878	1.979	2.085	2.132	2.179	-	-	-
24	1.716	1.747	1.818	1.818	1.824	1.925	2.026	2.132	2.179	2.226	2.351	-	-
28	1.899	1.912	1.983	1.983	1.989	2.090	2.191	2.297	2.344	2.391	2.516	2.641	-
32	2.031	2.044	2.115	2.115	2.121	2.222	2.323	2.429	2.476	2.523	2.648	2.773	2.898



AEROSPACE STANDARD

 FITTING, TEE,
 STANDARD AND REDUCER,
 BULKHEAD ON SIDE, FLARED

 AS1039
 SHEET 3 OF 7

 REV.
 G

TABLE 4 - TUBE SIZE AND CORRESPONDING THREAD

PORT SIZE	(NOMINAL TUBE SIZE)	T THREAD PER AS8879 CLASS 3A
02	.125	.3125-24 UNJF
03	.188	.3750-24 UNJF
04	.250	.4375-20 UNJF
05	.312	.5000-20 UNJF
06	.375	.5625-18 UNJF
08	.500	.7500-16 UNJF
10	.625	.8750-14 UNJF
12	.750	1.0625-12 UNJ
16	1.000	1.3125-12 UNJ
20	1.250	1.6250-12 UNJ
24	1.500	1.8750-12 UNJ
28	1.750	2.2500-12 UNJ
32	2.000	2.5000-12 UNJ

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE

/1/ MATERIAL:

- a. DASH AS CODE LETTER - TYPE 4130 STEEL FORGING OR BAR PER AMS6370 OR AMS-S-6758, OR TYPE 4140 STEEL BAR PER AMS6349 OR AMS6382.
- b. CODE LETTER D - TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS4133 OR AMS-QQ-A-367; OR 2024-T6 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6; OR 2024-T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6.
- c. CODE LETTER J - TYPE 304 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5639.
- d. CODE LETTER K - TYPE 316 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5648.
- e. CODE LETTER R - TYPE 321 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5645.
- f. CODE LETTER S - TYPE 347 CORROSION RESISTANCE STEEL FORGING OR BAR PER AMS5646.
- g. CODE LETTER T - 6Al-4V TITANIUM ALLOY FORGING OR BAR PER AMS4928. /21/
- h. CODE LETTER W - 7075-T73 ALUMINUM ALLOY FORGING PER AMS4141 OR AMS-QQ-A-367; OR 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124; OR 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9.

2. HEAT TREATMENT:

- a. DASH AS MATERIAL CODE LETTER - HARDNESS SHALL BE 92 HRB TO 40 HRC PER PROCUREMENT SPECIFICATION.
- b. OTHER MATERIAL CODE LETTERS - NONE.

	AEROSPACE STANDARD	AS1039 SHEET 4 OF 7	REV. G
	FITTING, TEE, STANDARD AND REDUCER, BULKHEAD ON SIDE, FLARED		

3. FINISH:

- a. DASH AS MATERIAL CODE LETTER - CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2, DYE BLACK.
- b. MATERIAL CODE LETTER D:
 - 1. ANODIZE PER AMS2472 OR MIL-A-8625, TYPE II, CLASS 2, DYE BLUE, DUPLEX SEAL PER PROCUREMENT SPECIFICATION.
 - 2. D CODE PARTS TO BE COATED WITH HIGH PURITY ALUMINUM ONLY WILL HAVE THE FINISH CODE LETTER "V" PLACED AFTER THE SIZE CODE IN THE PART NUMBER. HIGH PURITY ALUMINUM COAT PER PROCUREMENT SPECIFICATION. /20/
- c. MATERIAL CODE LETTER J - PASSIVATE PER AMS2700, TYPE 6 OR 7.
- d. MATERIAL CODE LETTER K - PASSIVATE PER AMS2700, TYPE 6 OR 7.
- e. MATERIAL CODE LETTER R - PASSIVATE PER AMS2700, TYPE 6 OR 7.
- f. MATERIAL CODE LETTER S - PASSIVATE PER AMS2700, TYPE 6 OR 7.
- g. MATERIAL CODE LETTER T - ANODIZE PER AMS2488, TYPE 2 OR FLUORIDE PHOSPHATE CONVERSION COAT PER AMS2486.
- h. MATERIAL CODE LETTER W:
 - 1. ANODIZE PER AMS2472 OR MIL-A-8625, TYPE II, CLASS 2, DYE BROWN, DUPLEX SEAL PER PROCUREMENT SPECIFICATION.
 - 2. W CODE PARTS TO BE COATED WITH HIGH PURITY ALUMINUM ONLY WILL HAVE THE FINISH CODE LETTER "V" AFTER THE SIZE CODE IN THE PART NUMBER. HIGH PURITY ALUMINUM COAT PER PROCUREMENT SPECIFICATION. /20/

/4/ PROCUREMENT SPECIFICATION: AS4841 EXCEPT AS SPECIFIED ON THIS STANDARD. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER LISTED IN THE NATIONAL AEROSPACE AND DEFENSE CONTRACTORS ACCREDITATION PROGRAM (NADCAP) QUALIFIED MANUFACTURER LIST FOR THIS PRODUCT TYPE. THE QML IS AVAILABLE AT www.eAuditNet.com.

/5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D, OR METHOD 7A3, 15A3, OR 15B.

- a. FOR SIZE 06 AND SMALLER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTERS "AS", AND MATERIAL CODE LETTER FOR CORROSION RESISTANT STEEL, TITANIUM AND ALUMINUM AND NO MATERIAL CODE LETTER FOR ALLOY STEEL.
- b. FOR SIZE 08 AND LARGER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER, AND MATERIAL CODE LETTER FOR CORROSION RESISTANT STEEL, TITANIUM AND ALUMINUM AND NO MATERIAL CODE LETTER FOR ALLOY STEEL.

6. INVENTORIED PARTS CONFORMING TO THE PREVIOUS "LETTER CHANGE" MAY BE USED TO DEPLETION.

/7/ FITTINGS WITH AS4396 STYLE S ENDS MAY BE ASSEMBLED INTO INTERNALLY THREADED PORTS BUT ARE HISTORICALLY UNRELIABLE AND ARE ONLY SUITABLE IN THAT APPLICATION FOR 1500 PSI MAXIMUM PRESSURE. FITTINGS WITH AS4396 STYLE G ENDS MAY BE DESIGNATED WITH THE SUFFIX G AFTER THE BASIC PART NUMBER AND CANNOT BE USED IN PORTS.

8. INTENDED USE: THIS PART IS DESIGNED FOR USE IN SYSTEMS WITH MAXIMUM OPERATING PRESSURES AS SHOWN IN TABLE 5.

	AEROSPACE STANDARD	AS1039 SHEET 5 OF 7	REV. G
	FITTING, TEE, STANDARD AND REDUCER, BULKHEAD ON SIDE, FLARED		