

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


**REV.  
G**

**AS1895™/4**

RATIONALE

FEDERAL SUPPLY CLASS  
5340


QPL DATE REQUIREMENT EXTENDED UNTIL JULY 2022. QUALIFICATION CONTINGENCY NOTE ADDED TO SECOND PARAGRAPH OF NOTE 3.

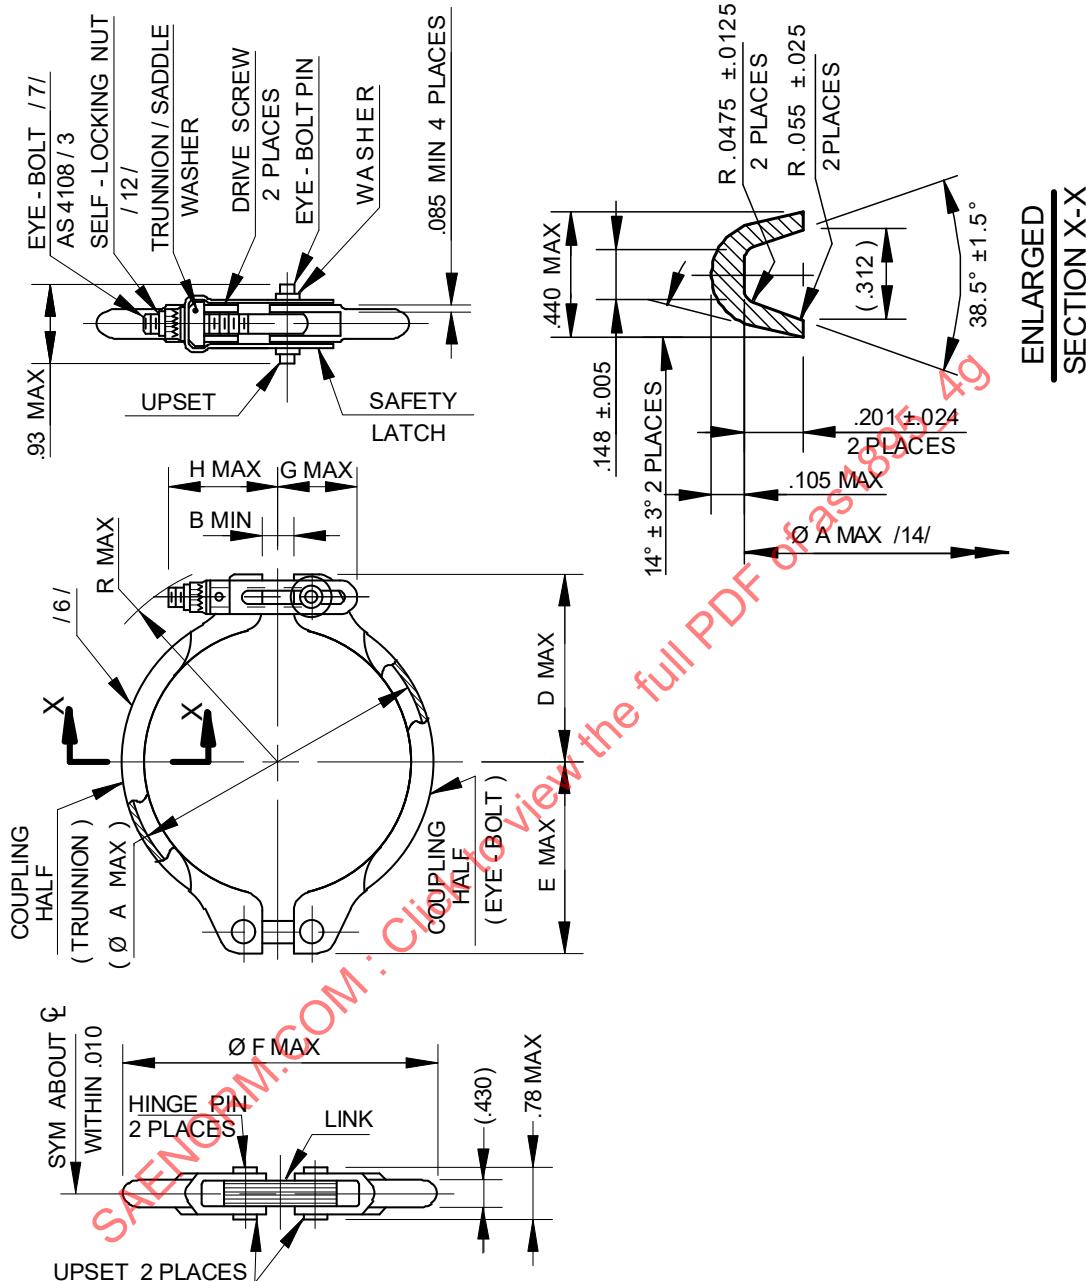

**FIGURE 1 - LOW PROFILE COUPLING**

For more information on this standard, visit  
<https://www.sae.org/standards/content/AS1895/4G>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: AS1895 /3/



**AEROSPACE STANDARD**

COUPLING, V-RETAINER, SINGLE LATCH,  
TYPE II LOW PROFILE

**AS1895™/4**  
SHEET 1 OF 5

**REV.  
G**

Copyright © 2021 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1985-12 REAFFIRMED 2015-01 REVISED 2021-06

TABLE 1 - DIMENSIONS, TORQUE, AND WEIGHTS

| BASIC<br>NUMBER<br>AS1895/4<br>SIZE CODE<br>/1/ /2/ /16/ | (TUBE<br>SIZE) | TORQUE |      |       |       |       |       |       |       | LB-EA<br>MAX |
|--|----------------|--------|------|-------|-------|-------|-------|-------|-------|--------------|
|  |                | A      | B    | D     | E     | F     | G     | H     | R     |              |
| 100  | 1.00           | 1.600  | .100 | 1.403 | 1.387 | 1.916 | .840  | 1.410 | 1.860 | .55- 70 .34  |
| 125  | 1.25           | 1.850  | .150 | 1.528 | 1.512 | 2.166 | .850  | 1.410 | 2.020 | .55- 70 .34  |
| 150  | 1.50           | 2.100  | .150 | 1.653 | 1.637 | 2.416 | .850  | 1.410 | 2.110 | .55- 70 .35  |
| 175  | 1.75           | 2.350  | .150 | 1.778 | 1.762 | 2.666 | .875  | 1.425 | 2.220 | .55- 70 .36  |
| 200  | 2.00           | 2.600  | .175 | 1.903 | 1.887 | 2.916 | .900  | 1.450 | 2.330 | .70- 85 .38  |
| 225  | 2.25           | 2.850  | .175 | 2.028 | 2.012 | 3.166 | .925  | 1.475 | 2.440 | .75- 90 .39  |
| 250  | 2.50           | 3.100  | .190 | 2.153 | 2.137 | 3.416 | .925  | 1.475 | 2.550 | .75- 90 .40  |
| 275  | 2.75           | 3.350  | .190 | 2.278 | 2.262 | 3.666 | .950  | 1.525 | 2.700 | .75- 90 .42  |
| 300  | 3.00           | 3.600  | .190 | 2.403 | 2.387 | 3.916 | .950  | 1.550 | 2.800 | .85-100 .43  |
| 325  | 3.25           | 3.850  | .210 | 2.528 | 2.512 | 4.166 | 1.100 | 1.575 | 2.920 | 90-105 .44   |
| 350  | 3.50           | 4.100  | .210 | 2.653 | 2.637 | 4.416 | 1.125 | 1.600 | 3.030 | 95-110 .45   |
| 400  | 4.00           | 4.600  | .100 | 2.903 | 2.887 | 4.916 | 1.385 | 1.700 | 3.240 | 100-115 .48  |
| 450  | 4.50           | 5.100  | .150 | 3.153 | 3.137 | 5.416 | 1.445 | 1.750 | 3.490 | 105-120 .54  |
| 500  | 5.00           | 5.600  | .200 | 3.403 | 3.387 | 5.916 | 1.470 | 1.775 | 3.700 | 105-120 .59  |
| 550  | 5.50           | 6.100  | .250 | 3.653 | 3.637 | 6.416 | 1.495 | 1.800 | 3.940 | 110-125 .62  |
| 600  | 6.00           | 6.600  | .300 | 3.903 | 3.887 | 6.916 | 1.670 | 1.825 | 4.170 | 110-125 .66  |
| 650  | 6.50           | 7.100  | .300 | 4.153 | 4.137 | 7.416 | 1.670 | 1.850 | 4.400 | 110-125 .73  |
| 700  | 7.00           | 7.600  | .300 | 4.403 | 4.387 | 7.916 | 1.670 | 1.850 | 4.630 | 110-125 .77  |
| 750  | 7.50           | 8.100  | .300 | 4.653 | 4.637 | 8.416 | 1.670 | 1.850 | 4.860 | 110-125 .80  |

SAENORM.COM : Click to view the full PDF of AS1895-4G

NOTES:

/1/

**TABLE 2 - COUPLING COMPONENT MATERIAL**

| PART                       | MATL                                 | TYPE                        | SPEC                                     | REMARKS  |
|----------------------------|--------------------------------------|-----------------------------|--|--|
| COUPLING HALVES            | CRES                                 | A286                        | AMS5525<br>AMS5732                       | A-286 MATERIAL IS USED FOR COUPLINGS SIZES 1.00 THRU 3.50 INCLUSIVE. SOLUTION AND PRECIPITATION HEAT TREATED. /2/. |
|                            | NICKEL ALLOY                         | 718                         | AMS5596<br>AMS5662                       | 718 MATERIAL IS USED FOR COUPLING SIZES 4.00 AND OVER. /2/   |
| TRUNNION/<br>SADDLE WASHER | CRES                                 | A286                        | AMS5731<br>AMS5732<br>AMS5734<br>AMS5737 | SOLUTION AND PRECIPITATION HEAT TREATED OR EQUIVALENT MATERIAL PROPERTIES ACHIEVED BY COLD WORK.                   |
|                            | NICKEL ALLOY                         | 713                         | AMS5377                                  | INVESTMENT CASTING   |
| EYEBOLT                    | CRES                                 | A286                        | AMS5731<br>AMS5732<br>AMS5737            | /2/ AND /7/  |
| SAFETY LATCH               | NICKEL ALLOY                         | 718                         | AMS5596                                  | SOLUTION AND PRECIPITATION HEAT TREATED.   |
| SELF-LOCKING NUT           | CRES                                 | A286                        | AMS5731<br>AMS5732                       | /2/ AND /7/  |
| EYEBOLT PIN                | CRES                                 | A286                        | AMS5731<br>AMS5732                       | SOLUTION AND PRECIPITATION HEAT TREATED.   |
| WASHER                     | CRES                                 | 303 OR 304                  | AMS5640<br>AMS5513                       |  |
| LINK                       | CRES                                 | A286                        | AMS5731<br>AMS5732<br>AMS5525            | SOLUTION HEAT TREATED OR SOLUTION AND PRECIPITATION HEAT TREATED.  |
| DRIVE SCREW                | CRES<br>CRES<br>CRES<br>NICKEL ALLOY | 302HQ<br>305<br>A286<br>718 |  |  |

/2/ FINISH:

- a. SELF-LOCKING NUT: DASH = SILVER PLATED OR L = DRY FILM LUBED.
- b. COUPLING HALVES:
  - CRES A286 COUPLING HALVES: PASSIVATE PER AMS2700 TYPES 1, 2, 3, OR 8, MECHANICAL POLISH OR ELECTRO-POLISH TO REMOVE IRON PARTICLES. INSIDE SURFACE OF COUPLING HALVES SHALL BE COATED WITH SOLID DRY FILM LUBRICANT PER AS1895.
  - NICKEL ALLOY 718 COUPLING HALVES: NO FINISH REQUIRED. INSIDE SURFACE OF COUPLING HALVES SHALL BE COATED WITH SOLID DRY FILM LUBRICANT PER AS1895. NOTE: THE OUTSIDES OF 718 COUPLING FLANKS SHALL HAVE LAY LINE MARKINGS WITH "-1000F-" (REFER TO AS1895).
- c. EYEBOLT: LUBRICATE WITH ANTI-SEIZING COMPOUND. MAY USE "HEAVY DUTY ANTI-SEIZE" COMPOUND #LB 8009 FROM LOCTITE® (CAGE CODE 05972) OR EQUIVALENT.

/3/ QUALIFICATION:

PARTS SHALL BE QUALIFIED IN A COMPLETE COUPLING ASSEMBLY IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS1895. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST PRI-QPL-AS1895 FOR THIS STANDARD. SEE [www.eAuditNet.com](http://www.eAuditNet.com) FOR CURRENT QPL ONLINE.

THIS QPL REQUIREMENT SHALL BE IN EFFECT FOR PURCHASE ORDERS PLACED ON OR AFTER JULY 31, 2022. SUPPLIERS SEEKING LISTING ON THE INITIAL QPL MUST APPLY TO PRI FOR APPROVAL NO LATER THAN DECEMBER 31, 2021. UNTIL THE QPL IS IN EFFECT, USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVALS. LEGACY OR INVENTORIED HARDWARE MANUFACTURED PRIOR TO QPL REQUIRED DATE: JULY 31, 2022, MAY BE USED UNTIL DEPLETION VIA ACCEPTANCE BY OEM OR USER SUPPLEMENT ACCEPTANCE SHEETS. TRANSITION TO PRI-QPL SHALL BE COMPLETED BY JULY 31, 2022.

4. ACCEPTANCE TEST:

EACH COUPLING SHALL BE SUBJECT TO A HYDROSTATIC PROOF PRESSURE TEST PER AS1895.

5. INTERMATEABILITY:

THIS COUPLING, WHEN MATED WITH FLANGES, FLANGE ENDS, AND SEAL CONFORMING TO AS1895/5-XXX, AS1895/6-XXX, AND AS1895/7-XXX, AS1895/8-XXX, AS1895/9-XXX, AS1895/14-XXX, AS1895/15-XXX, AS1895/16-XXX, AS1895/17-XXX, AND AS1895/23 SHALL MEET THE REQUIREMENTS OF SPECIFICATION AS1895.

/6/ MARKING:

BY ELECTROMECHANICAL ETCHING PER AS478-7A2 OR LASER MARKING PER AS478-15A2, THE COUPLING SHALL BE MARKED WITH THE FOLLOWING:

- a. AS1895/4 (FULL PART NUMBER)
- b. SUPPLIER PART NUMBER
- c. SUPPLIER NAME, TRADEMARK OR CAGE CODE
- d. DATE OF MANUFACTURE
- e. TORQUE - "CAUTION: TORQUE TO (VALUE SHOWN IN TABLE 1) LB-IN"

/7/ THREADS:

- a. EYEBOLT AND NUT THREADS CONFORM TO AS8879
- b. EYEBOLT THREAD .3125-24UNJF-3A
- c. SELF-LOCKING NUT THREAD .3125-24UNJF-3B

8. OPERATING TEMPERATURE: -65 TO +1200 °F FLUID TEMPERATURE.

9. BREAK EDGES .003 TO .015, UNLESS OTHERWISE SPECIFIED.

10. DIMENSIONING AND TOLERANCING: ANSI Y14.5M-1982.

11. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS .XXX ±.010, .XX = ±.03, ANGULAR DIMENSIONS ±.5°.

/12/ INTENDED USE:

USE DRY FILM LUBRICATED NUTS AT NUT TEMPERATURES OF 1000 °F AND OVER.

/13/ THE FOOLPROOF SAFETY FEATURE RESULTS IN AN INCREASE OF OVERALL ENVELOPE DIMENSION R MAX BY .020 INCH MAXIMUM, AND IN A WEIGHT INCREASE OF .026 POUND MAXIMUM.

/14/ DIAMETER A MAXIMUM FOR MACHINING PURPOSES ONLY, TO BE INSPECTED DURING MACHINING OPERATION.

15. REVISION INDICATOR: A CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT, INCLUDING TECHNICAL REVISIONS. CHANGE BARS AND (R) ARE NOT USED IN ORIGINAL PUBLICATIONS, NOR IN DOCUMENTS THAT CONTAIN EDITORIAL CHANGES ONLY.

|  | AEROSPACE STANDARD   | AS1895™/4<br>SHEET 4 OF 5 | REV.<br>G |
|---|--|---------------------------|-----------|
|   | COUPLING, V-RETAINER, SINGLE LATCH,<br>TYPE II LOW PROFILE |                           |           |