

NOTICE

AS25488

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS25488, REVISION F, NOTICE 2 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS25488, REVISION F, NOTICE 2. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as25488

ISSUED 2004-04

CUSTODIAN: SAE AE-8/AE-8C1

PROCUREMENT SPECIFICATION: MIL-C-7974



**AEROSPACE STANDARD**

CONNECTOR, PLUG, ATTACHABLE  
EXTERNAL ELECTRIC POWER, AIRCRAFT,  
28 VOLT DC, OPERATING POWER

**AS25488**  
SHEET 1 OF 3

Copyright 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)  
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)  
Email: [custsvc@sae.org](mailto:custsvc@sae.org)

SAE WEB ADDRESS: <http://www.sae.org>

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

AS25488

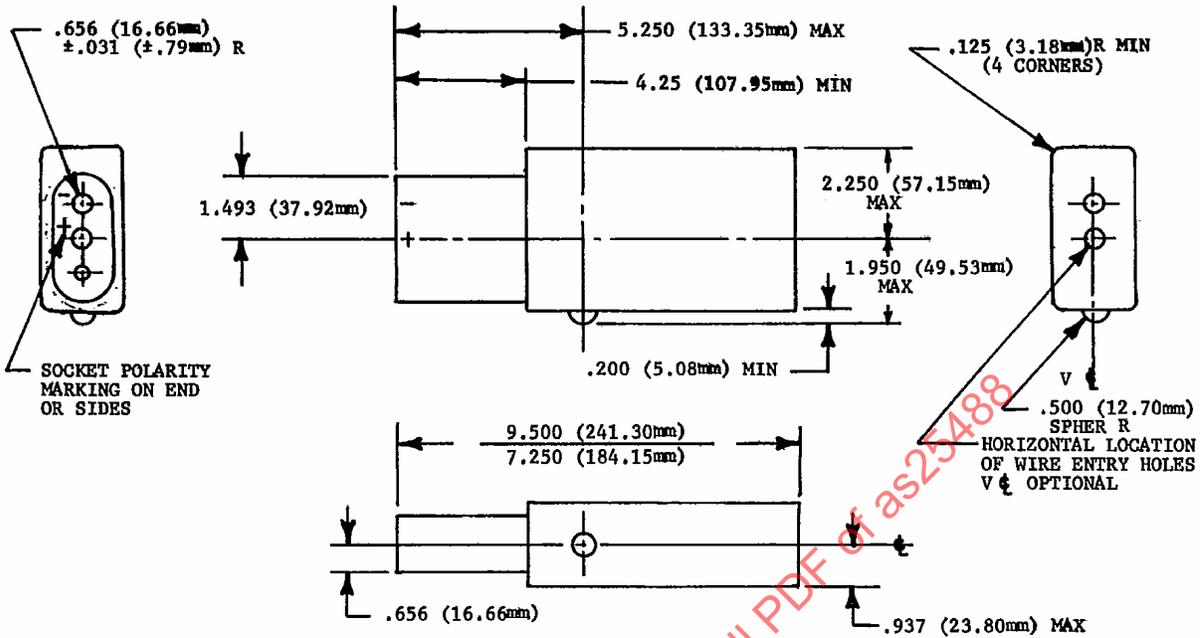


TABLE I

PART NO.	WIRE SIZE	SUPERSEDES
MS25488-25	0	MS25488-2
MS25488-26	00	MS25488-3
MS25488-27	0000	MS25488-1, -4




TABLE II

WIRE SIZE	E DIA		F DIA	
	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM
0	.578 (14.68 mm)	.558 (14.17 mm)	.458 (11.63 mm)	.438 (11.13 mm)
00	.640 (16.26 mm)	.620 (15.75 mm)	.520 (13.21 mm)	.500 (12.70 mm)
0000	.780 (19.81 mm)	.760 (19.30 mm)	.645 (16.38 mm)	.622 (15.80 mm)