

REV.
C

SAE AS3243

RATIONALE

FEDERAL SUPPLY CLASS
5306

REVISE WRENCHING ELEMENT RUNOUT CALLOUT (RELOCATE FROM WRENCH FLATS TO POINTS). REVISE THREAD SPECIFICATION TO AS8879. REVISE LIGHTENING HOLE CONFIGURATION (ADD SECTION VIEW) TO ALLOW OPTIONAL SHAPE AT BOTTOM OF HOLE, ADD SYMBOL FOR MMC TO POSITION TOLERANCE FOR SAFETY WIRE HOLES, AND FIGURE 1 REDRAWN.

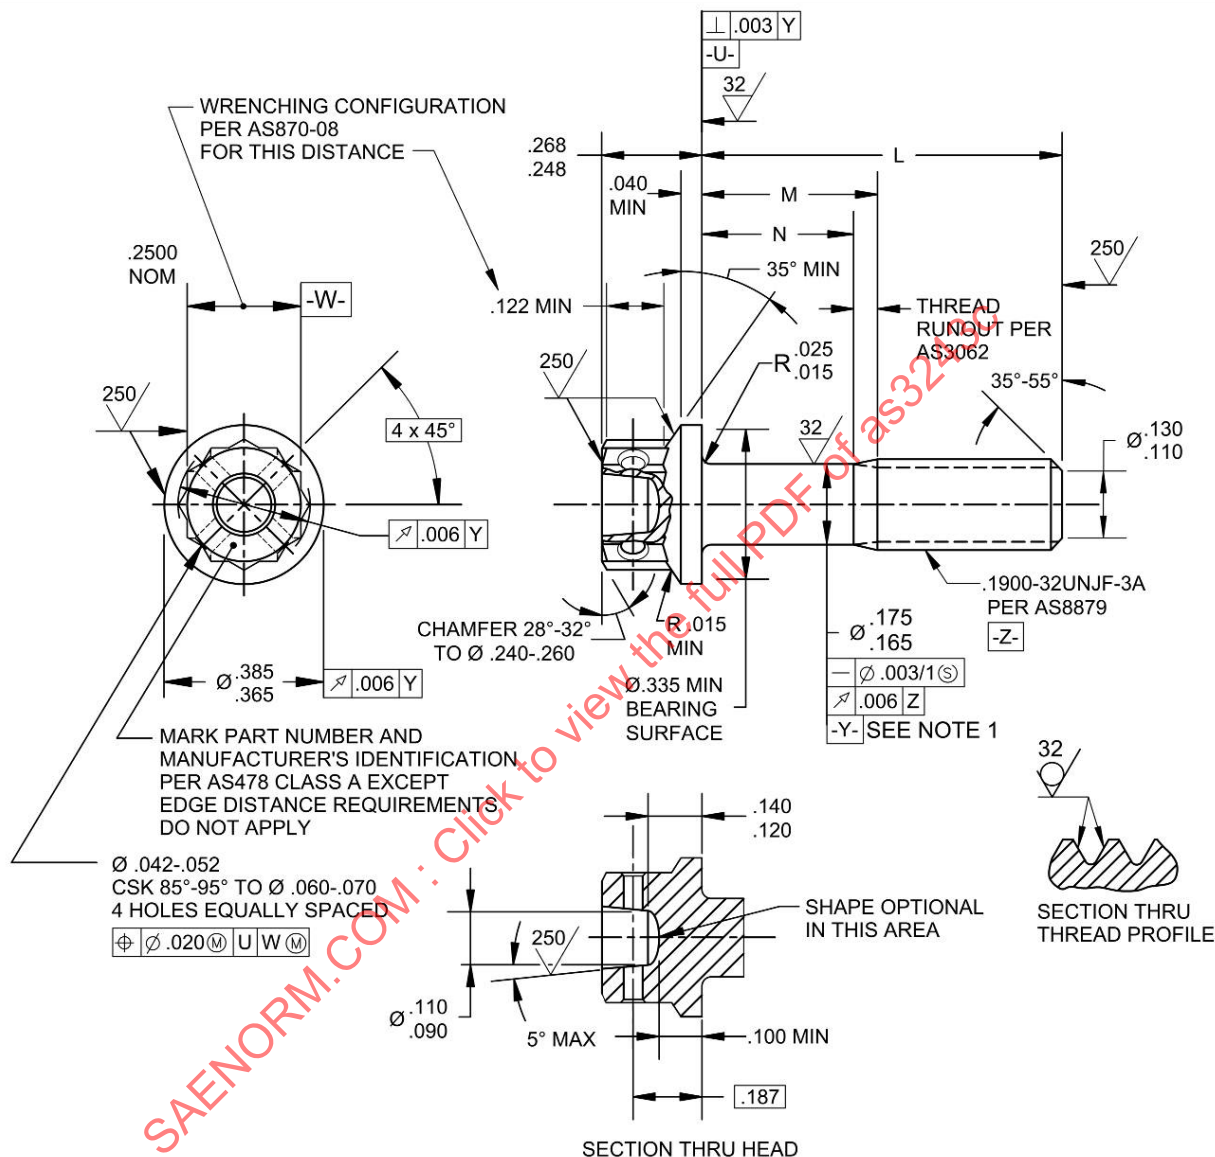


FIGURE 1 - BOLT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3243C>

THIRD ANGLE PROJECTION

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7466

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) BOLT, MACHINE – DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, NICKEL ALLOY, UNS N07718, 185 KSI UTS MIN, .1900-32 UNJF-3A

SAE AS3243
SHEET 1 OF 2

REV.
C