

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS39029™/113

FEDERAL SUPPLY CLASS
5935

RATIONALE

REVISION IS REQUIRED TO RE-WRITE THE REQUIREMENTS SECTION TO INCLUDE THE REQUIREMENTS THAT HAVE BEEN MISPLACED IN THE NOTES SECTION AND TO RESIZE/ENHANCE FIGURES 1 THROUGH 3 TO IMPROVE LEGIBILITY.

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS39029.


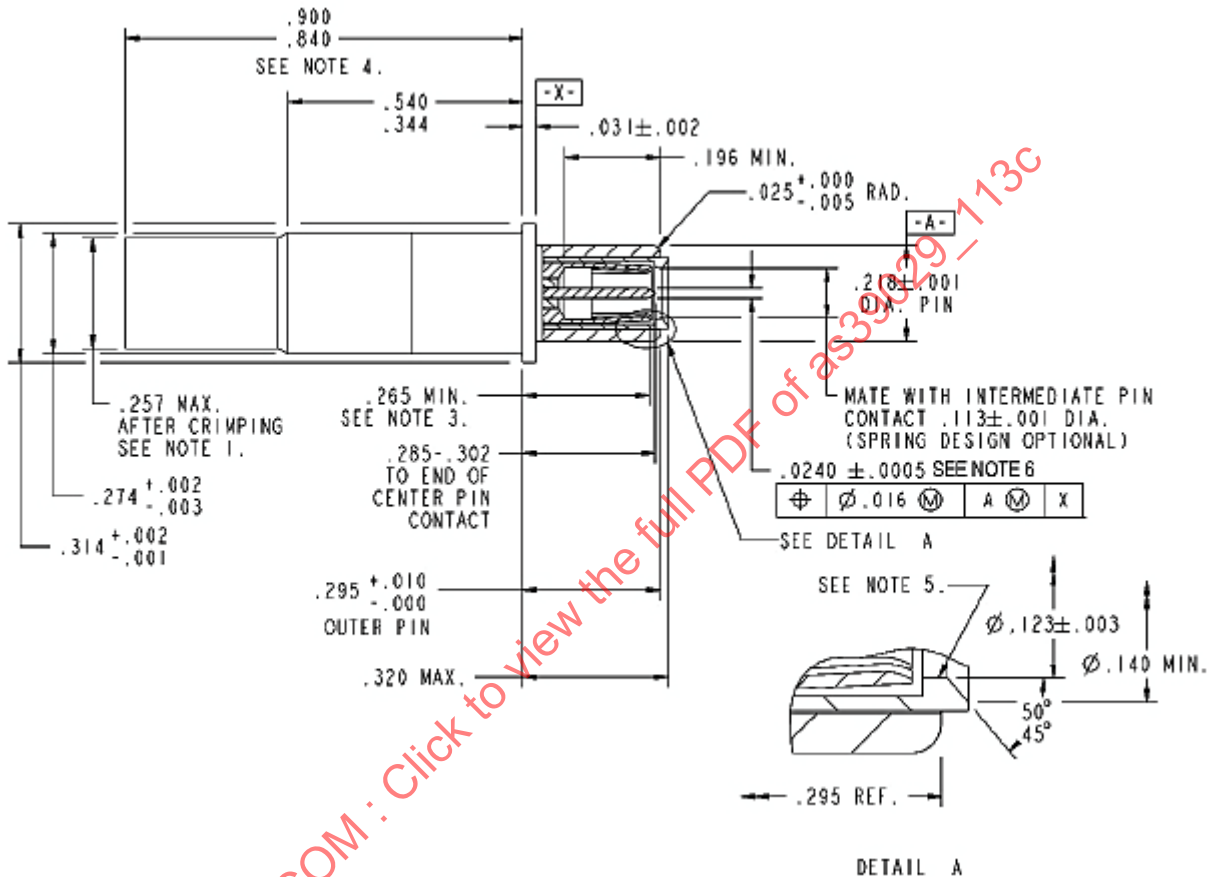


FIGURE 1 - CONCENTRIC TWINAX CONTACT

For more information on this standard, visit
<https://www.sae.org/standards/content/AS39029/113C>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8C1

PROCUREMENT SPECIFICATION: AS39029



AEROSPACE STANDARD

(R) CONTACT, ELECTRICAL CONNECTOR,
CONCENTRIC TWINAX, PIN, SIZE 8
(FOR MIL-DTL-38999 SERIES I, III, AND IV CONNECTORS)

AS39029™/113
SHEET 1 OF 7

REV.
C

Copyright © 2021 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2007-01 REVISED 2021-05

FIGURE 1 NOTES:

1. WHEN THE HEAT SHRINK BOOT IS USED THE DIAMETER SHALL NOT EXCEED .276 INCH (7.01 MM) OVER THE INSTALLED AND RECOVERED HEAT SHRINK BOOT (SEE DRAWING, FIGURE 4).
2. DIMENSIONS SHOWN AFTER PLATING.
3. POINT AT WHICH SQUARE ENDED PIN OF THE SAME BASIC DIAMETER AS THE MATING CONTACT FIRST ENGAGES THE INTERMEDIATE CONTACT SPRING (SEE REQUIREMENT 5). PROVISIONS FOR CLEARANCE HOLE SHALL BE PROVIDED FOR THE TEST PIN (SEE DRAWING AND FIGURE 6).
4. MEASUREMENT SHALL BE TAKEN AFTER ASSEMBLY BUT BEFORE INSTALLATION OF THE HEAT SHRINK BOOT. MEASUREMENT SHALL INCLUDE CRIMP FERRULE (SEE DRAWING).
5. FOR QUALIFICATION, CERTIFICATION IS REQUIRED (SEE REQUIREMENT 2).
6. .008 MAXIMUM PERMISSIBLE PIN TIP FLAT.

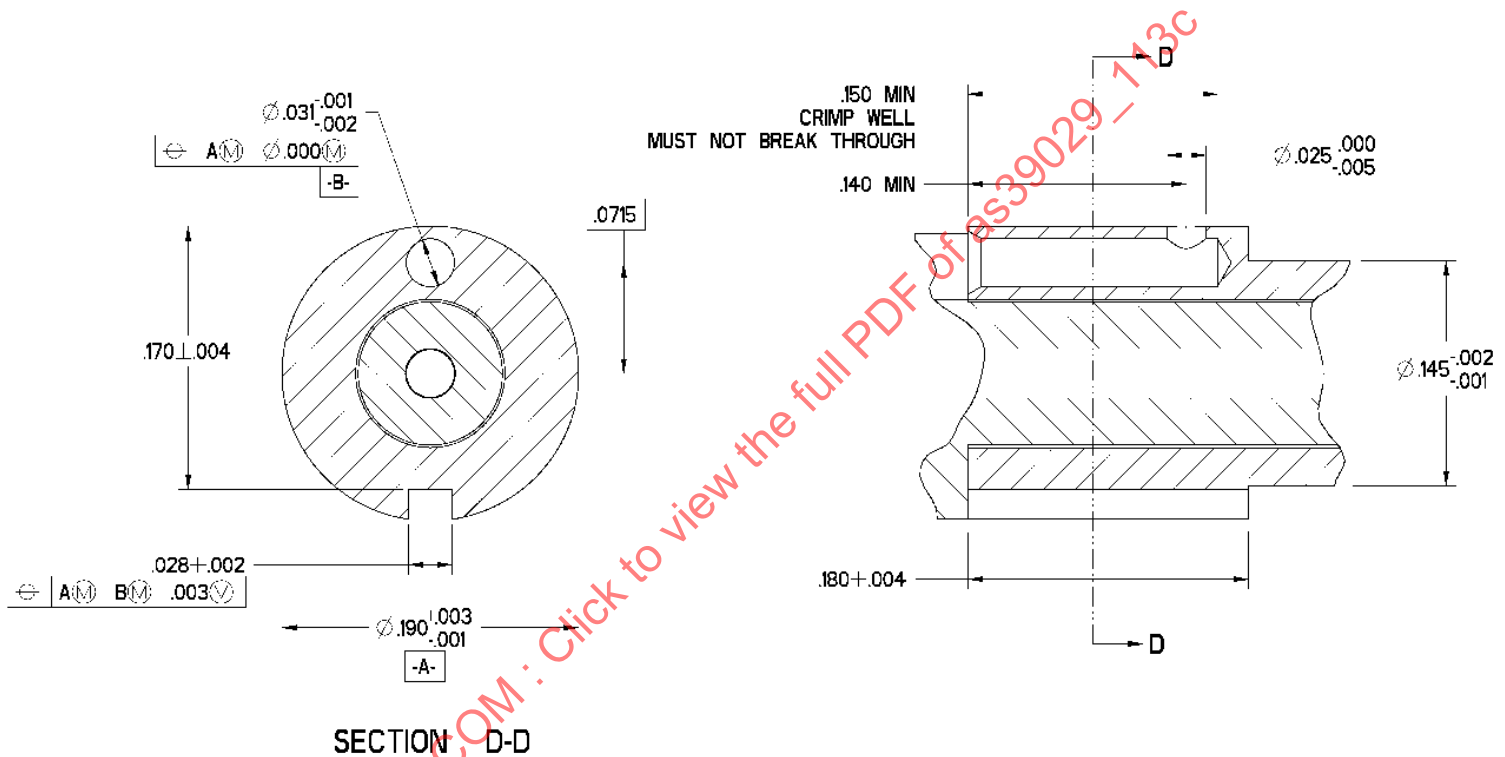


FIGURE 2 - BIN CODE 625: UNASSEMBLED CONCENTRIC TWINAX INTERMEDIATE CONTACT PIECE PART (SEE REQUIREMENT 1)

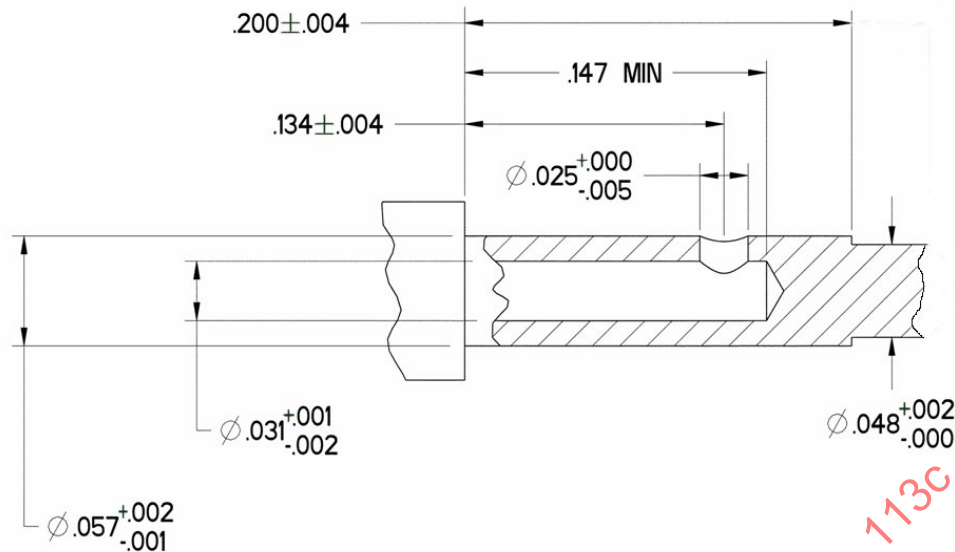


FIGURE 3 - BIN CODE 625: UNASSEMBLED CONCENTRIC TWINAX CENTER CONTACT PIECE PART - CRIMP AREA DETAILS (SEE REQUIREMENT 1)

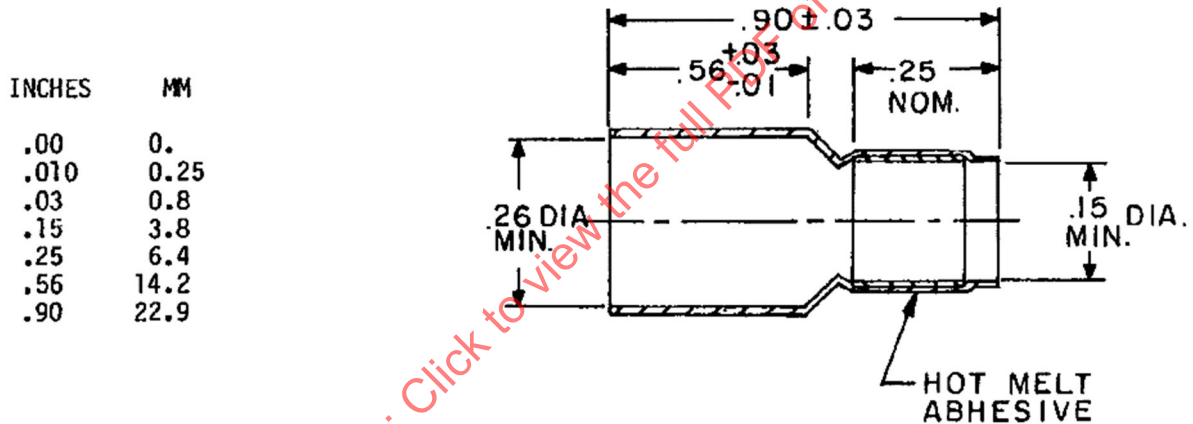


FIGURE 4 - HEAT SHRINK BOOT

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS39029.

1. DESIGN AND CONSTRUCTION:

CONTACTS SHALL BE DESIGNED IN ACCORDANCE WITH FIGURES 1 THROUGH 3 AND TABLE 1. DIMENSIONS ARE IN INCHES. METRIC EQUIVALENTS ARE IN PARENTHESES, ARE GIVEN FOR GENERAL INFORMATION ONLY, AND BASED UPON 1.00 INCH = 25.4 MM. DIMENSIONS SHOWN APPLY AFTER PLATING. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ASME Y14.5M.

THE MAXIMUM NUMBER OF PIECE PARTS IN THE ASSEMBLED CONTACT (FIGURE 1), EXCLUDING THE HEAT SHRINK BOOT, SHALL NOT EXCEED FIVE. THE CONTACT SHALL BE PROVIDED AS UNASSEMBLED PIECE PARTS. SOME PIECE PARTS OF BIN CODE 625 (FIGURES 2 AND 3) REQUIRE DIFFERENT CRIMP TOOLS PRIOR TO FINAL ASSEMBLY (SEE TABLE 8). SEE TABLE 1 FOR DESIGN CHARACTERISTICS.

TABLE 1 - DESIGN CHARACTERISTICS

BIN CODE	COLOR BANDS			CONTACT CAVITY SIZE	CABLE ACCOMMODATED	TYPE	CLASS
	1ST	2ND	3RD				
625	BLUE	RED	GREEN	8	M17/176-00002	D	B

ASSEMBLY PROCEDURE: MANUFACTURER'S RECOMMENDED ASSEMBLY INSTRUCTIONS, INCLUDING AN EXPLODED VIEW OF THE ASSEMBLY, SHALL BE SHIPPED WITH UNIT PACKAGE.

ONE HEAT SHRINK BOOT SHALL BE PROVIDED WITH EACH ASSEMBLY (FIGURE 1). REPLACEMENT HEAT SHRINK BOOTS MAY BE ORDERED USING PART NUMBER M39029/113-BT1.

THERE IS NO QPL FOR THE HEAT SHRINK BOOT. THE HEAT SHRINK BOOT IS ONLY AVAILABLE FROM QUALIFIED CONTACT SUPPLIERS.

2. MATERIAL:

THE MINIMUM HARDNESS OF THE INSULATOR BETWEEN THE CENTER CONTACT AND THE INTERMEDIATE CONTACT SHALL BE ROCKWELL HARDNESS M90 WHEN TESTED PER ASTM D785.

HEAT SHRINK BOOT SHALL BE IN ACCORDANCE WITH AS23053/8.

3. QUALIFICATION: CONTACTS SHALL COMPLY WITH THE REQUIREMENTS OF AS39029. CONTACTS SHALL BE QUALIFIED USING THE TOOLING DEFINED IN TABLE 8.

THE MANUFACTURER'S RELIABILITY ASSURANCE PROGRAM FOR AS39029/113 AND ASSEMBLY PROCEDURES SHALL COMPLY WITH THE AS9100 AEROSPACE STANDARD FOR QUALITY MANAGEMENT SYSTEM REQUIREMENTS. OTHER ESTABLISHED AND INDUSTRY RECOGNIZED QUALITY ASSURANCE STANDARDS THAT ASSURE ALL PRODUCTS PRODUCED CONFORM TO THE CONTRACT REQUIREMENTS ARE ACCEPTABLE. HOWEVER, IF USED, IT IS THE RESPONSIBILITY OF THE MANUFACTURER TO PROVIDE EVIDENCE OF COMPLIANCE TO AS9100. THE QUALIFYING ACTIVITY (QA) AUTHORITY RESERVES THE RIGHT TO MONITOR, MEASURE, AND VALIDATE COMPLIANCE AT THEIR DISCRETION.

4. ELECTRICAL:

LOW SIGNAL LEVEL CONTACT RESISTANCE (CENTER AND INTERMEDIATE CONTACTS ONLY): SEE TABLE 2.

TABLE 2 - LOW SIGNAL LEVEL CONTACT RESISTANCE (CENTER AND INTERMEDIATE CONTACTS ONLY)

BIN CODE	CABLE ACCOMMODATED	MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	
		INITIAL	AFTER CONDITIONING
625	M17/176-00002	55	66

CONTACT RESISTANCE: SEE TABLE 3.

TABLE 3 - CONTACT RESISTANCE

BIN CODE	CONTACT	CABLE ACCOMMODATED	TEST CURRENT (AMPERES)	MAXIMUM VOLTAGE DROP (MILLIVOLTS)		
				25 °C, +3 °C, -0 °C		+175 °C, +3 °C, -0 °C
				INITIAL	AFTER CONDITIONING	AFTER CONDITIONING
625	CENTER	M17/176-00002	1.0	55	66	94
625	INTERMEDIATE	M17/176-00002	1.0	55	66	94
625	OUTER	M17/176-00002	12.0	75	90	128

	AEROSPACE STANDARD	AS39029™/113 SHEET 4 OF 7	REV. C
	(R) CONTACT, ELECTRICAL CONNECTOR, CONCENTRIC TWINAX, PIN, SIZE 8 (FOR MIL-DTL-38999 SERIES I, III, AND IV CONNECTORS)		

DIELECTRIC WITHSTANDING VOLTAGE: SHALL BE AS SPECIFIED IN TABLE 4.

TABLE 4 - DIELECTRIC WITHSTANDING VOLTAGE

CONTACTS	TEST VOLTAGE (AC RMS)	
	SEA LEVEL	70000 FEET
CENTER TO INTERMEDIATE	1000	250
INTERMEDIATE TO OUTER	500	250

5. MECHANICAL:

CONTACT ENGAGEMENT AND SEPARATION FORCE: THE ENGAGEMENT AND SEPARATION FORCES OF THE INTERMEDIATE SOCKET CONTACT SHALL BE TESTED WITH TEST PIN INSERTED A MINIMUM OF .070 INCH. THE TEST PIN SHALL BE IN ACCORDANCE WITH FIGURE 6. ENGAGEMENT AND SEPARATION FORCES SHALL BE AS SPECIFIED IN TABLE 5.

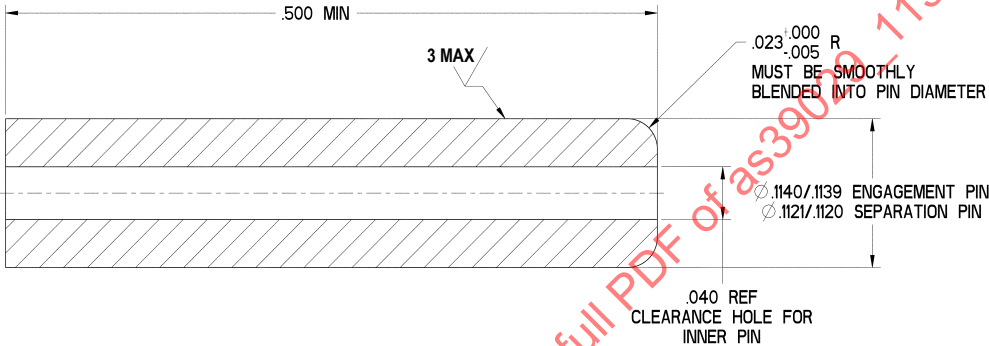


FIGURE 6 - ENGAGEMENT AND SEPARATION TEST PIN DIMENSIONS

TABLE 5 - CONTACT ENGAGEMENT AND SEPARATION FORCE

TEST PIN DIAMETER (INCH)	MINIMUM SEPARATION FORCE (OUNCES)		MAXIMUM ENGAGEMENT FORCE (OUNCES)		MAXIMUM AVERAGE ENGAGEMENT FORCE
	INITIAL	AFTER CONDITIONING	INITIAL	AFTER CONDITIONING	
.1140 +.0000 -.0001	NA	NA	18	22	NA
.1120 +.0001 -.0000	.5	.4	NA	NA	NA

CRIMP TENSILE STRENGTH (CENTER, INTERMEDIATE, AND OUTER CONTACT CRIMP JOINT): SEE TABLE 6.

TABLE 6 - CRIMP TENSILE STRENGTH (AT AMBIENT)

BIN CODE	CABLE ACCOMMODATED	AXIAL LOAD (POUNDS, MINIMUM)		
		CENTER CONTACT	INTERMEDIATE CONTACT	OUTER CONTACT
625	M17/176-00002	8	8	25

6. VIBRATION: THE VIBRATION SHALL BE IN ACCORDANCE WITH 39029, EXCEPT TEST CONDITION VI SHALL BE TEST CONDITION V. USE THE VIBRATION ENVELOPE SHOWN IN FIGURE 7.