

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
B

SAE AS85049/87

RATIONALE

REVISED TO INCLUDE OTHER PLATING OPTIONS IN SUPPORT OF THE AS85049B-A3 AMENDMENT. ALIGN SPECIFICATION WITH SAE GUIDELINES AND REVIEWED FOR KNOWN TECHNICAL ISSUES.

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF SAE AS85049.

FEDERAL SUPPLY CLASS
5935


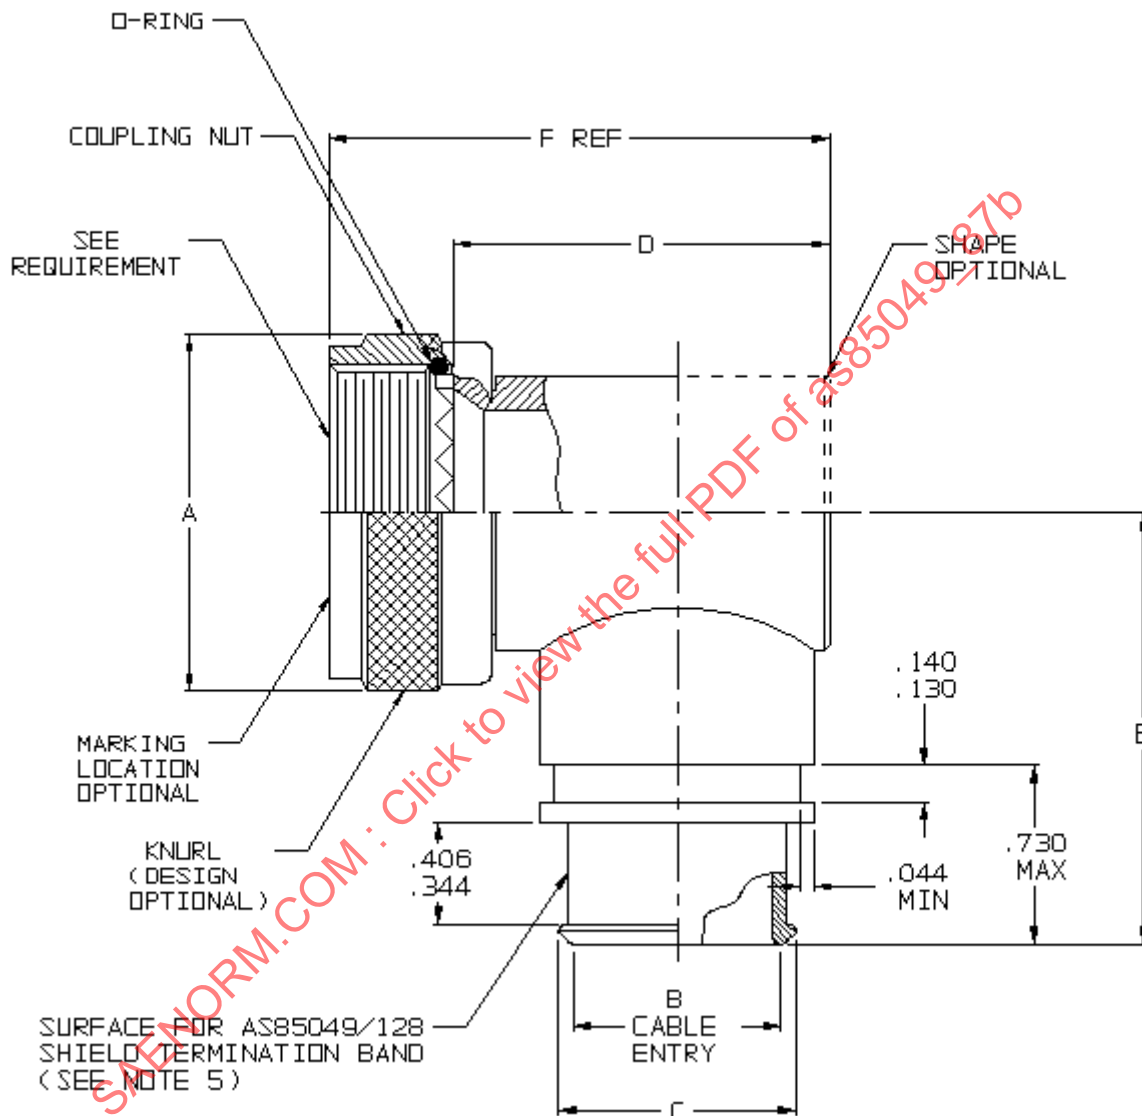


FIGURE 1 - CONFIGURATION AND DIMENSIONS

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS85049/87B>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS85049

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 90°, SELF-LOCKING, SHIELD BAND TERMINATION (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-38999 SERIES I AND II CONNECTORS)

SAE AS85049/87
SHEET 1 OF 3

REV.
B

Copyright 2011 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2000-06 REVISED 2011-01

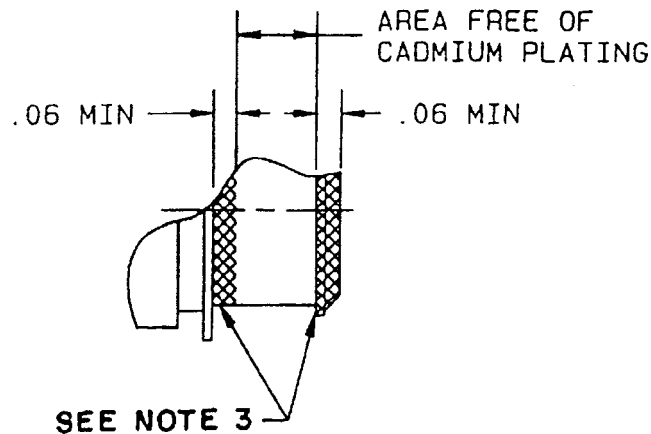


FIGURE 2 - SELECTIVE PLATING

TABLE 1 - SHELL SIZE AND DIMENSIONS

SHELL SIZE	CONNECTOR SHELL SIZE		A MAX DIA	B DIA ± 0.010 ENTRY SIZE		C DIA REF		D MAX DIM	E MAX DIM	F REF
	SERIES I	SERIES II		02	03	02	03			
08	9	8	.858 (21.8)	N/A	.250	N/A	.395 (10.0)	1.375 (34.9)	1.417 (36.0)	1.563 (39.7)
10	11	10	.984 (25.0)	N/A	.312	N/A	.457 (11.6)	1.437 (36.5)	1.480 (37.6)	1.625 (41.3)
12	13	12	1.157 (29.4)	.312 (7.9)	.438 (11.1)	.457 (11.6)	.583 (14.8)	1.562 (39.7)	1.553 (39.4)	1.750 (44.5)
14	15	14	1.279 (32.5)	.438 (11.1)	.562 (14.3)	.583 (14.8)	.707 (18.0)	1.687 (42.8)	1.614 (41.0)	1.875 (47.6)
16	17	16	1.406 (35.7)	.500 (12.7)	.625 (15.9)	.645 (16.4)	.770 (19.6)	1.750 (44.5)	1.678 (42.8)	1.938 (49.2)
18	19	18	1.516 (38.5)	.625 (15.9)	.750 (19.1)	.770 (19.6)	.895 (22.7)	1.875 (47.6)	1.733 (44.0)	2.063 (52.4)
20	21	20	1.642 (41.7)	.625 (15.9)	.812 (20.6)	.770 (19.6)	.957 (24.3)	1.938 (49.2)	1.796 (45.6)	2.126 (54.0)
22	23	22	1.768 (45.0)	.688 (17.5)	.938 (23.8)	.829 (21.1)	1.083 (27.5)	2.062 (52.4)	1.859 (47.2)	2.250 (57.2)
24	25	24	1.889 (48.0)	.750 (19.1)	1.000 (25.4)	.895 (22.7)	1.145 (29.1)	2.125 (54.0)	1.919 (48.7)	2.313 (58.8)

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 25.4 MM = 1 INCH.
3. CADMIUM/NICKEL INTERFACE SHALL BE COATED WITH POLYSULFIDE SEALANT.
4. PART SUPPLIED WITH STANDARD DETENTED SELF-LOCKING WHICH PROVIDES A POSITIVE AUDIBLE DETENTED COUPLING. OPTION 'N' IS A FREE SPINNING SELF-LOCKING COUPLING.
5. RIBBED, KNURL OR SURFACE ROUGHNESS 125-250 IN ACCORDANCE WITH ANSI B46.1

 <i>An SAE International Group</i>	AEROSPACE STANDARD		SAE AS85049/87 SHEET 2 OF 3	REV. B
	(R) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 90°, SELF-LOCKING, SHIELD BAND TERMINATION (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-38999 SERIES I AND II CONNECTORS)			