

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Electric and optical fibre cables – Test methods for non-metallic materials –
Part 508: Mechanical tests – Pressure test at high temperature for insulation
and sheaths**

**Câbles électriques et à fibres optiques – Méthodes d'essai pour les matériaux
non-métalliques –
Partie 508: Essais mécaniques – Essai de pression à température élevée pour
les enveloppes isolantes et les gaines**

IECNORM.COM : Click to view the full PDF of IEC 60811-508:2012



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2012 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Electric and optical fibre cables – Test methods for non-metallic materials –
Part 508: Mechanical tests – Pressure test at high temperature for insulation
and sheaths**

**Câbles électriques et à fibres optiques – Méthodes d'essai pour les matériaux
non-métalliques –
Partie 508: Essais mécaniques – Essai de pression à température élevée pour
les enveloppes isolantes et les gaines**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

R

ICS 29.035.01; 29.060.20

ISBN 978-2-88912-984-3

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms and definitions	6
4 Test method	6
4.1 General.....	6
4.2 Apparatus.....	6
4.2.1 Air oven.....	6
4.2.2 Indentation device	7
4.3 Insulation	7
4.3.1 Sample and test piece preparation	7
4.3.2 Procedure.....	7
4.4 Sheath	9
4.4.1 Sample and test piece preparation for sheaths.....	9
4.4.2 Procedure.....	10
5 Test report.....	11
Annex A (normative) Calculation of the compressing force.....	15
Annex B (informative) Recommended performance requirement	17
Bibliography.....	18
Figure 1 – Indentation device.....	12
Figure 2 – Measurement of indentation.....	12
Figure 3 – Measurement of indentation for small test pieces	13
Figure 4 – Flat cable with a flat smaller side	13
Figure 5 – Indentation device for flat cables with a flat smaller side	14
Table A.1 – General value for k	15

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**ELECTRIC AND OPTICAL FIBRE CABLES –
TEST METHODS FOR NON-METALLIC MATERIALS –****Part 508: Mechanical tests –
Pressure test at high temperature for insulation and sheaths**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60811-508 has been prepared by IEC technical committee 20: Electric cables.

This Part 508 of IEC 60811 cancels and replaces Clause 8 of IEC 60811-3-1:1985, which is withdrawn. Full details of the replacements are shown in Annex A of IEC 60811-100:2012.

Significant technical changes with respect to the previous edition are as follows:

- re-statement of oven characteristics, especially relating to anti-vibration and to temperature control;
- enhanced detail as to the preparations and testing of flat cables;
- enhanced detail as to thickness and dimensional measurements.

See also the Foreword to IEC 60811-100:2012.

The text of this standard is based on the following documents:

FDIS	Report on voting
20/1304/FDIS	20/1353/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This part of IEC 60811 shall be used in conjunction with IEC 60811-100.

A list of all the parts in the IEC 60811 series, published under the general title *Electric and optical fibre cables – Test methods for non-metallic materials*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 60811-508:2012

INTRODUCTION

The IEC 60811 series specifies the test methods to be used for testing non-metallic materials of all types of cables. These test methods are intended to be referenced in standards for cable construction and for cable materials.

NOTE 1 Non-metallic materials are typically used for insulating, sheathing, bedding, filling or taping within cables.

NOTE 2 These test methods are accepted as basic and fundamental and have been developed and used over many years principally for the materials in all energy cables. They have also been widely accepted and used for other cables, in particular optical fibre cables, communication and control cables and cables for ships and offshore applications.

IECNORM.COM : Click to view the full PDF of IEC 60811-508:2012

ELECTRIC AND OPTICAL FIBRE CABLES – TEST METHODS FOR NON-METALLIC MATERIALS –

Part 508: Mechanical tests – Pressure test at high temperature for insulation and sheaths

1 Scope

This Part 508 of IEC 60811 gives the procedure for a pressure test at high temperature, which typically applies to thermoplastic compounds used for insulating and sheathing materials.

NOTE 1 The method is principally intended for thermoplastic materials, but may be used for cross-linked materials when specifically required by the relevant cable standard.

NOTE 2 The test method is not recommended for thicknesses below 0,7 mm.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60811-100:2012, *Electric and optical fibre cables – Test methods for non-metallic materials –Part 100: General*

IEC 60811-201, *Electric and optical fibre cables – Test methods for non-metallic materials – Part 201: General tests – Measurement of insulation thickness*

IEC 60811-202, *Electric and optical fibre cables – Test methods for non-metallic materials – Part 202: General tests – Measurement of thickness of non-metallic sheaths*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60811-100 apply.

4 Test method

4.1 General

This part of IEC 60811 shall be used in conjunction with IEC 60811-100.

This standard gives the method for the pressure test at high temperature which applies to insulation and sheathing compounds.

All the tests shall be carried out not less than 16 h after the extrusion of the insulating or sheathing compounds.

4.2 Apparatus

4.2.1 Air oven

The test shall be carried out in an oven. The oven shall use natural air circulation.

NOTE 1 Forced or continuous air circulation is not required. Ovens fitted with air stirring mechanisms are likely to cause vibration.

The oven shall not incorporate any equipment likely to cause vibration, nor shall it include exposed heating elements. The temperature of the air shall be maintained continuously at the value specified in the relevant cable standard. The oven shall be capable of operating to within ± 2 K of the specified test temperature.

NOTE 2 The need for a temperature control to ± 2 K is crucial. This is especially so if the material under test is a thermoplastic with a sharp melting point (such as some ethylene polymers) as a small temperature rise above that specified can result in a large increase in indentation.

In operation, the oven shall be located in a position free from vibration.

4.2.2 Indentation device

A device according to Figure 1 shall be used. It shall consist of a rectangular blade with an edge $(0,70 \pm 0,01)$ mm wide which can be pressed against the test piece under the influence of an applied force.

4.3 Insulation

4.3.1 Sample and test piece preparation

For each core to be tested, three adjacent pieces shall be taken from a sample having a length of 250 mm to 500 mm. The length of each piece shall be 50 mm to 100 mm.

From each core piece taken, any covering – including the semi-conducting layer, if any – shall be removed mechanically. According to the type of cable, the test piece may have a circular, flat or sector-shaped cross-section of length (45 ± 5) mm.

The cores of twin- and multiple-grouped-core flat cables without sheath shall not be separated individually, except if the individual conductor cross-section is $\geq 10 \text{ mm}^2$. If so, a test piece taken from the insulation of an individual core shall be tested.

The minimum thickness of insulation to be tested shall be 0,7 mm.

NOTE Insulation thickness down to 0,4 mm may be tested under certain circumstances, but it is not recommended. If tests are made with samples having a thickness below 0,7 mm, it should be recorded as such in the test report.

4.3.2 Procedure

4.3.2.1 Fixing of test pieces

The final test piece shall consist of a piece of the sample from 4.3.1.

Circular cores shall be mounted in the position shown in Figure 1 (3a).

A flat cable without sheath shall be laid on its flat/major axis side.

Sector-shaped cores shall be mounted on a support of an appropriate type as shown in Figure 1 (3b and 3c).

All test pieces shall be fixed to the support in such a manner that they do not change position during the test. Special care shall be taken with test pieces so that they do not curve under the pressure of the blade.

4.3.2.2 Application of force

A force calculated according to Annex A shall be applied in a direction perpendicular to the axis of the core.

The blade shall also be perpendicular to the relevant axis.

4.3.2.3 Protocol in air oven

The loaded blade shall be placed onto the fixed test piece at ambient temperature. The whole assembly shall then be placed in the air oven which is at the specified test temperature.

The apparatus, with loaded test pieces, shall be placed in a position free from vibration (see 4.2.1).

The temperature of the air shall be maintained continuously at the value specified in the relevant cable standard. In case of dispute, the temperature shall be checked by means of a suitable temperature-measuring device, mounted at the same level as the test piece and as close as possible to one of the test pieces and the temperature shall be continuously monitored during the test.

NOTE 1 It is critical to ensure that the temperature does not, at any time, exceed the upper limit specified for testing the particular material. Temperatures below the lower limit specified may be experienced briefly immediately after starting the test. Such short periods may be ignored.

The assembly shall be kept in the test position for the time specified in the relevant cable standard, or, if the time is not specified in the cable standard, for the following times:

- 4 h for test pieces having a value of $D \leq 15$ mm
- 6 h for test pieces having a value of $D > 15$ mm.

NOTE 2 Details for the determination of D are found in Annex A.

4.3.2.4 Cooling

At the end of the specified duration, the test piece shall be rapidly cooled under load. This operation may be carried out inside or outside the air oven by spraying the test piece with cold water on the spot where the blade is pressing.

The test piece shall be removed from the apparatus when it has cooled to a temperature where recovery of the insulation no longer occurs; the test piece shall then be cooled further by immersion in cold water.

4.3.2.5 Measurement

Immediately after cooling, the test piece shall be prepared for determining the depth of indentation.

The conductor shall be withdrawn, leaving the test piece in the form of a tube.

A narrow strip shall be cut from the test piece in the direction of the axis of the core, perpendicular to the indentation as shown in Figure 2.

The strip shall be laid flat under a measuring microscope or a measuring projector and the cross-wire shall be adjusted to the bottom of the indentation and the outside of the test piece as shown in the same figure.

Small test pieces, up to about 6 mm external diameter, shall be cut transversely at and adjacent to the indentation, as shown in Figure 3, and the depth of the indentation shall be

determined as the difference between the microscope measurements on sectional views 1 and 2 as shown in the same figure.

All measurements shall be made in millimetres to two decimal places.

NOTE Care should be taken when making the measurement, as factors such as thermomechanical forces may have distorted the upper surface of the sample, giving a false position for the top of indentation, and the true indentation may differ from that measured directly at the point of indentation. It is therefore essential to use the thickness value measured before applying the indenter as the baseline figure. If it is evident that distortion has taken place, or in the case of any uncertainty about the result, a suitable correction to the value of indentation should be made, thus:

- if the original thickness is δ , but after the test the apparent thickness has become δI , then for the purposes of the calculation, the measured indentation (call it M) needs to be corrected by deducting an amount equal to $\delta I - \delta$;
- the correct indentation percentage then becomes

$$\frac{M - (\delta I - \delta)}{\delta} \times 100$$

4.3.2.6 Expression of the results

The indentation values, measured on the three test pieces taken from each core or strip, shall be calculated as a percentage of the insulation thickness (as measured in accordance with Annex A). The median of the three values shall be recorded. If there are changes in thickness due to the test, the formula in the NOTE in 4.3.2.5 should be used.

For flat cables, the median indentation value is the mean value of the indentation values from all the cores of the same size in the sample.

NOTE In the absence of any requirement in the relevant cable standard, a recommendation is given in Annex B.

4.4 Sheath

4.4.1 Sample and test piece preparation for sheaths

For each sheath to be tested, three adjacent pieces shall be taken from a sample having a length of 250 mm to 500 mm from which the covering (if any) and all the internal parts (cores, fillers, inner covering, armour etc. if any) have been removed.

The length of each piece of sheathing shall be 50 mm to 100 mm.

From each piece of sheathing, a strip of width equal to about one-third of the perimeter, but not more than 20 mm, shall be cut parallel to the direction of the axis of the cable if the sheath does not have ridges.

If the sheath shows ridges caused by five or fewer cores, the strip shall be cut in the direction of the ridges so that it contains at least one groove which lies approximately in the middle of the strip throughout its length.

If the sheath has ridges caused by more than five cores, the strip shall be cut in the same manner and these ridges shall be removed by grinding.

NOTE 1 A machine of the type specified in Annex A of IEC 60811-501:2012 has been found suitable for grinding or cutting the ridges.

If the sheath is directly applied on a concentric conductor, an armour or on a metallic screen, and therefore has ridges which cannot be ground or cut away (unless the diameter is large), the sheath shall not be removed, and the whole cable piece shall be used as a test piece.

If the smaller sides of a flat cable are fully rounded in shape, this test shall be carried out on one of the smaller sides. To calculate the compressing force (see Annex A), D is the minor dimension of the cable and δ is the mean sheath thickness e_3 as shown in Figure 4.

If the smaller sides are flat, or nearly flat, as depicted in Figure 4, a test piece shall be prepared by cutting a strip from the wide side of the cable in the direction of the axis of the cable. On the inner side, only the ridges shall be removed by grinding or cutting. The width of the strip to be tested shall be at least 10 mm but not more than 20 mm. The thickness of the strip shall be measured at the place where the compressing force, F , is applied.

NOTE 2 Insulation thickness down to 0,4 mm may be tested under certain circumstances, but it is not recommended. If tests are made with samples having a thickness below 0,7 mm, it should be recorded as such in the test report.

4.4.2 Procedure

4.4.2.1 Fixing of test pieces

The strips shall be supported by a metal mandrel, which may be halved in the direction of its axis to make a more stable support.

NOTE A metal pin or a metal tube is suitable as a mandrel.

The radius of the mandrel shall be approximately equal to half the inner diameter of the test piece.

The apparatus, the strip and the supporting mandrel shall be arranged so that the mandrel supports the strip and the blade is pressed against the outer surface of the test piece.

Test pieces of flat cable sheaths shall be placed on a support as shown in Figure 5 when the smaller sides of the cable are flat.

The force shall be applied in a direction perpendicular to the axis of the mandrel (or of the cable when a whole cable piece is used) and the blade shall also be perpendicular to the axis of the mandrel, or of the cable when a whole cable is used.

If the smaller sides of a flat cable are flat, or nearly flat, as depicted in Figure 4, the test piece (strip) shall be bent around a mandrel having a diameter approximately equal to the diameter of the core of the cable; the longitudinal axis of the strip shall be perpendicular to the axis of the mandrel. Provision shall be made so that the inner surface of the strip shall be in contact over at least 120° of the circumference of the mandrel (see Figure 5). The metal blade of the test apparatus shall be placed on the middle of the test piece.

For flat cables where the smaller sides are flat, or nearly flat δ (in mm) is the thickness of the strip at the place where the force is applied. D (in mm) is the diameter of the mandrel plus twice the value of δ and as shown in Figure 5.

4.4.2.2 Application of force

A force calculated according to Annex A shall be applied in a direction perpendicular to the axis of the mandrel (or of the cable when a whole cable piece is used).

The blade shall also be perpendicular to the relevant axis.

4.4.2.3 Protocol in air oven

See 4.3.2.3.

4.4.2.4 Cooling

See 4.3.2.4.

4.4.2.5 Measurement

The indentation shall be measured on a narrow strip cut from the test piece, as described in 4.3.2.5 and shown in Figure 2.

For flat cables where the smaller sides are flat, or nearly flat, the depth of indentation shall be related to the original value, δ , as described in 4.4.2.1 and as shown in Figure 5.

NOTE Care should be taken when making the measurement, as factors such as thermomechanical forces may have distorted the upper surface of the sample giving a false position for the top of indentation, and the true indentation may differ from that measured directly at the point of indentation. It is therefore essential to use the thickness value measured before applying the indenter as the baseline figure. If it is evident that distortion has taken place, or in the case of any uncertainty about the result, a suitable correction to the value of indentation should be made, thus:

- if the original thickness is δ , but after the test the apparent thickness has become δ_1 , then for the purposes of the calculation, the measured indentation (call it M) needs to be corrected by deducting an amount equal to $\delta_1 - \delta$;
- the correct indentation percentage then becomes:


$$\frac{M - (\delta_1 - \delta)}{\delta} \times 100$$

4.4.2.6 Expression of the results

See 4.3.2.6.

5 Test report


The test report shall be in accordance with that given in IEC 60811-100.

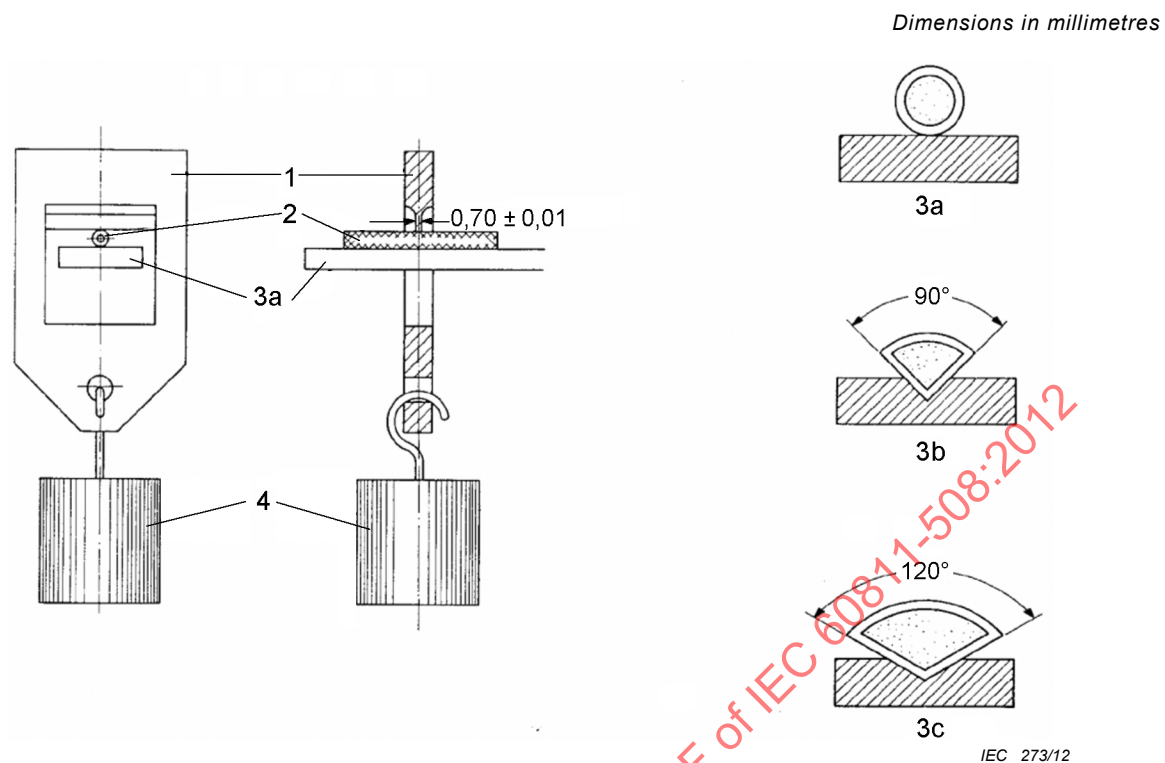

Key

1	testing frame	3a, 3b, 3c	supports
2	sample	4	load


Figure 1 – Indentation device

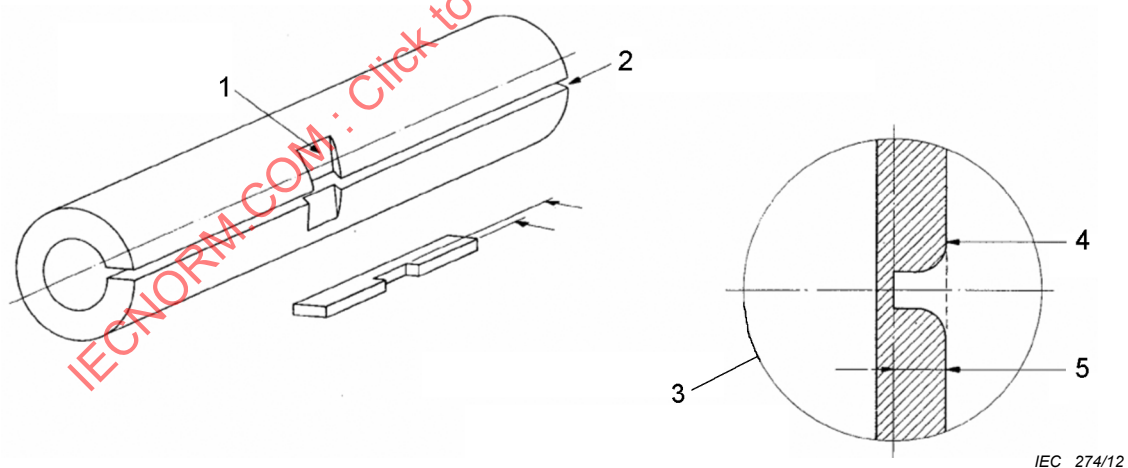


Key

1	indentation
2	thin slice to be cut out
3	sectional view of indent under microscope
4	cross-wire of the microscope
5	depth of Indentation

Figure 2 – Measurement of indentation

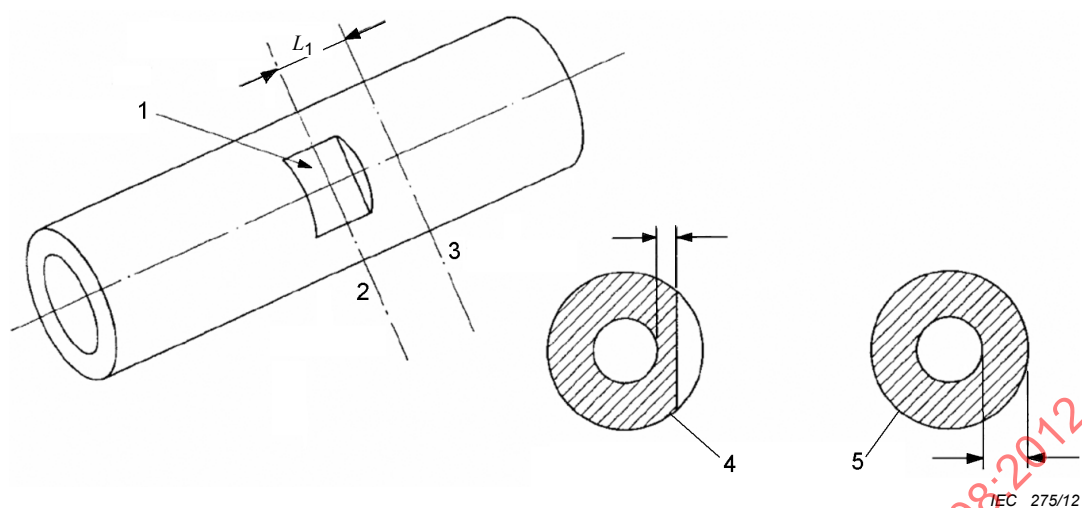**Key**


- 1 indentation
- 2 section 1
- 3 section 2
- 4 sectional view 1 ("2") under measuring microscope
- 5 sectional view 2 ("3") under measuring microscope
- L_1 3 mm to 5 mm

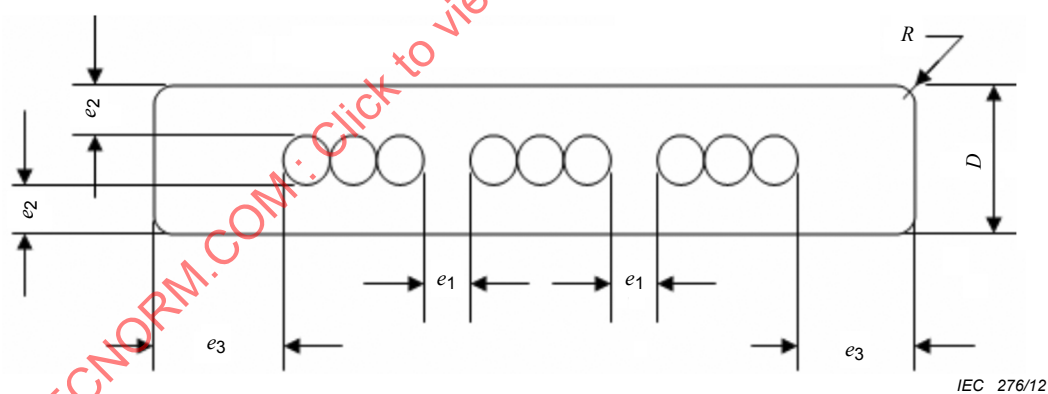Figure 3 – Measurement of indentation for small test pieces**Key**

- e_1 distance between core groups
- e_2 sheath thickness
- e_3 mean sheath thickness
- R radius approximately e_2
- D minor dimension

NOTE Figure 4 shows where to take the samples from the sheath of a flat cable.

Figure 4 – Flat cable with a flat smaller side

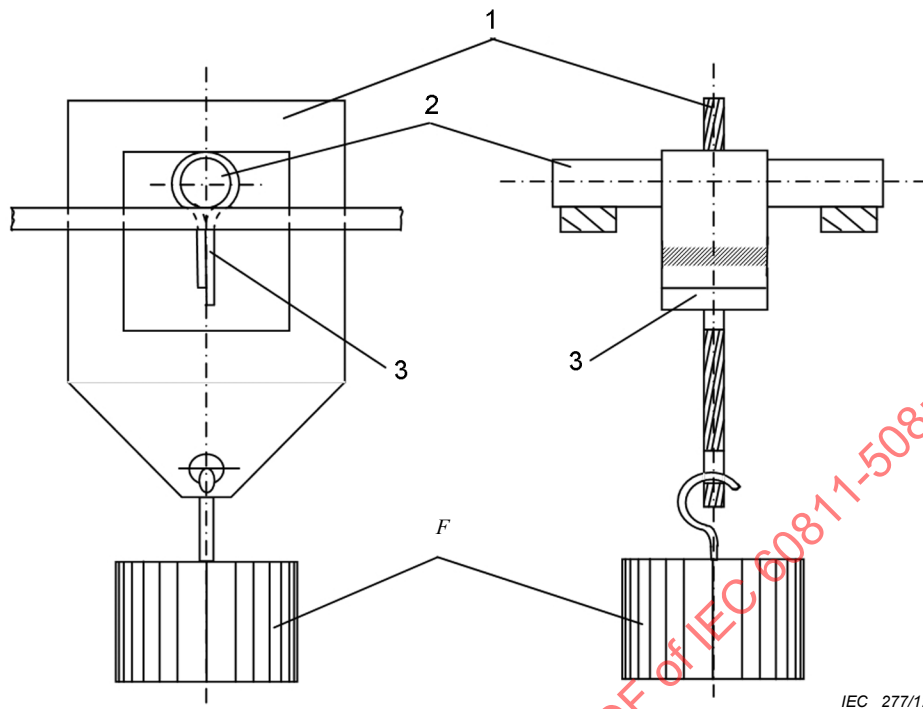

Key

- 1 mandrel blade
- 2 mandrel
- 3 fixed test piece bent around mandrel
- F force

Figure 5 – Indentation device for flat cables with a flat smaller side

Annex A (normative)

Calculation of the compressing force

The force F , in newtons, which shall be exerted by the blade upon the test piece, shall be given by the formula:

$$F = k\sqrt{2 D \delta - \delta^2}$$

where

- k is a coefficient which shall be specified in the standard for the type of cable;
- δ is the value of the thickness of the insulation or the sheath, as measured on the test piece, and in accordance with IEC 60811-201 (insulation) or IEC 60811-202 (sheath);
- D is the mean value of the outer diameter of the test piece (insulation) or the mandrel diameter plus twice the thickness (sheath).

If a value of k is not specified in the cable standard, it shall be taken from Table A.1.

Table A.1 – General value for k

k	Insulation	Sheath
0,6	Flexible cables and cores of flexible cables Cores, with $D \leq 15$ mm, for cables for fixed installations	Flexible cables and cables Cables for fixed installation having a value $D \leq 15$ mm
0,7	Cores, with $D > 15$ mm, and for sector-shaped cores for cables for fixed installations	Cables for fixed installation having a value $D > 15$ mm

The force applied upon the piece of flat cable without sheath shall be twice the value given by the above formula, where D is the mean value of the minor dimension of the test piece (see Figure 4.)

In the case of insulation, the thickness shall be measured on a thin slice of the test piece as close as possible to the intended point of indentation.

For flat cables without sheath, the outer diameter of the insulated cores is the mean diameter of the individual cores of the same size, discounting any of smaller nominal conductor.

For sector-shaped cores, D is the mean value of the diameter of the “back” or circular part of the sector, in millimetres, to one decimal place. This is determined from three measurements, by means of a tape measure, of the circumference of the core assembly (the measurements being made at three different places on the assembled cores).

In the case of the sheath of a flat cable, D is the minor outer dimension of the test piece.

If the smaller sides of a flat cable are fully rounded in shape, this test shall be carried out on one of the smaller sides. To calculate the compressing force (see Annex A), D is the minor dimension of the cable and δ is the mean sheath thickness e_3 as shown in Figure 4.

For flat cables where the smaller sides are flat, or nearly flat δ (in mm) is the thickness of the strip at the place where the force is applied. D (in mm) is the diameter of the mandrel plus twice the value of δ and as shown in Figure 5.

In the case of a sheath, the thickness of the prepared test piece shall be measured as close as possible to the intended point of indentation by any suitable method.

The values of δ and D are both expressed in millimetres, to two decimal places.

IECNORM.COM : Click to view the full PDF of IEC 60811-508:2012

Annex B

(informative)

Recommended performance requirement

The performance requirements for a particular type or class of insulated conductor or cable should preferably be given in the individual cable standard.

In the absence of any given requirement, it is recommended that the following value is adopted for any cable tested against this standard:

- maximum indentation value (%): 50

NOTE The value of 50 % is inseparable from the underlying principle of the formula and is the same for all materials. The severity of the test can be changed by variation of the factor k only, without altering the value of 50 %.

IECNORM.COM : Click to view the full PDF of IEC 60811-508:2012

Bibliography

IEC 60811-3-1:1985, *Common test methods for insulating and sheathing materials of electric cables – Part 3: -Methods specific to PVC compounds – Section One – Pressure test at high temperature – Tests for resistance to cracking*
(withdrawn)

IEC 60811-203, *Electric and optical fibre cables – Test methods for non-metallic materials – Part 203: General tests – Measurement of overall dimensions*

IEC 60811-401, *Electric and optical fibre cables – Test methods for non-metallic materials – Part 401 Miscellaneous tests – Thermal ageing methods – Ageing in an air oven*

IEC 60811-501:2012, *Electric and optical fibre cables – Test methods for non-metallic materials – Part 501: Mechanical tests – Tests for determining the mechanical properties of insulating and sheathing compounds*

IECNORM.COM : Click to view the full PDF of IEC 60811-508:2012

IECNORM.COM : Click to view the full PDF of IEC 60811-508:2012

SOMMAIRE

AVANT-PROPOS	21
INTRODUCTION	23
1 Domaine d'application	24
2 Références normatives	24
3 Termes et définitions	24
4 Méthode d'essai	24
4.1 Généralités	24
4.2 Appareillage	25
4.2.1 Etuve à air	25
4.2.2 Dispositif d'empreinte	25
4.3 Enveloppe isolante	25
4.3.1 Echantillonnage et préparation des éprouvettes	25
4.3.2 Mode opératoire	25
4.4 Gaine	27
4.4.1 Echantillon et préparation des éprouvettes pour les gaines	27
4.4.2 Mode opératoire	28
5 Rapport d'essai	29
Annexe A (normative) Calcul de la force de compression	33
Annexe B (informative) Recommandations relatives aux exigences de fonctionnement	35
Bibliographie	36
Figure 1 – Dispositif d'empreinte	30
Figure 2 – Mesure de l'empreinte	30
Figure 3 – Mesure de l'empreinte pour les petites éprouvettes d'essai	31
Figure 4 – Câble méplat avec un petit côté plat	31
Figure 5 – Dispositif d'empreinte pour câbles méplats avec petit côté plat	32
Tableau A.1 – Valeur générale pour k	33

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

**CÂBLES ÉLECTRIQUES ET À FIBRES OPTIQUES –
MÉTHODES D'ESSAI POUR LES MATÉRIAUX NON-MÉTALLIQUES –****Partie 508: Essais mécaniques –
Essai de pression à température élevée
pour les enveloppes isolantes et les gaines**

AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (CEI) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de la CEI). La CEI a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, la CEI – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de la CEI"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec la CEI, participent également aux travaux. La CEI collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de la CEI concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de la CEI intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de la CEI se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de la CEI. Tous les efforts raisonnables sont entrepris afin que la CEI s'assure de l'exactitude du contenu technique de ses publications; la CEI ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de la CEI s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de la CEI dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de la CEI et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) La CEI elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de la CEI. La CEI n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à la CEI, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de la CEI, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de la CEI ou de toute autre Publication de la CEI, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de la CEI peuvent faire l'objet de droits de brevet. La CEI ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets et de ne pas avoir signalé leur existence.

La Norme internationale CEI 60811-508 a été établie par le comité d'études 20 de la CEI: Câbles électriques.

La présente Partie 508 de la CEI 60811 annule et remplace l'Article 8 de la CEI 60811-3-1:1985, qui est supprimée. L'ensemble des détails relatifs aux remplacements figure dans l'Annexe A de la CEI 60811-100:2012.

Des modifications techniques importantes ont été effectuées par rapport à l'édition précédente, comme suit:

- redéfinition des caractéristiques relatives à l'étuve, en particulier les caractéristiques antivibratoires et le contrôle de la température;

- des détails supplémentaires relatifs aux préparations et aux essais de câbles méplats;
- des détails supplémentaires relatifs aux mesures d'épaisseur et de dimensions.

Voir également l'avant-propos de la CEI 60811-100:2012.

Le texte de cette norme est issu des documents suivants:

FDIS	Rapport de vote
20/1304/FDIS	20/1353/RVD

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à l'approbation de cette norme.

Cette publication a été rédigée selon les Directives ISO/CEI, Partie 2.

La présente partie de la CEI 60811 doit être utilisée conjointement avec la CEI 60811-100.

Une liste de toutes les parties de la série CEI 60811, publiées sous le titre général *Câbles électriques et à fibres optiques – Méthodes d'essai pour les matériaux non-métalliques*, peut être consultée sur le site web de la CEI.

Le comité a décidé que le contenu de cette publication ne sera pas modifié avant la date de stabilité indiquée sur le site web de la CEI sous "<http://webstore.iec.ch>" dans les données relatives à la publication recherchée. A cette date, la publication sera

- reconduite,
- supprimée,
- remplacée par une édition révisée, ou
- amendée.

IECNORM.COM : Click to view the full text of IEC 60811-508:2012

INTRODUCTION

La série CEI 60811 précise les méthodes à employer pour les essais des matériaux non-métalliques sur tous les types de câbles. Ces méthodes d'essai seront citées en référence dans les normes relatives à la construction des câbles et aux matériaux des câbles.

NOTE 1 Les matériaux non-métalliques sont généralement utilisés pour l'isolation, le gainage, le matelassage, le remplissage ou le rubanage des câbles.

NOTE 2 Ces méthodes d'essai sont reconnues comme fondamentales; elles ont été développées et utilisées durant de nombreuses années, principalement pour les matériaux dans tous les câbles de distribution d'énergie. Elles ont aussi été largement reconnues et utilisées pour d'autres types de câbles, en particulier les câbles à fibres optiques, les câbles de communication et de commande, ainsi que les câbles utilisés à bord des navires et dans les applications offshore.

IECNORM.COM : Click to view the full PDF of IEC 60811-508:2012

CÂBLES ÉLECTRIQUES ET À FIBRES OPTIQUES – MÉTHODES D'ESSAI POUR LES MATÉRIAUX NON-MÉTALLIQUES –

Partie 508: Essais mécaniques – Essai de pression à température élevée pour les enveloppes isolantes et les gaines

1 Domaine d'application

La présente Partie 508 de la CEI 60811 décrit la procédure à suivre pour réaliser l'essai de pression à température élevée, généralement applicable aux mélanges thermoplastiques utilisés pour les matériaux d'isolation et de gainage.

NOTE 1 Cette méthode est principalement destinée aux matériaux thermoplastiques, mais elle peut être utilisée pour les matériaux réticulés lorsque la norme applicable au câble l'exige spécifiquement.

NOTE 2 Cette méthode d'essai n'est pas recommandée pour les épaisseurs inférieures à 0,7 mm.

2 Références normatives

Les documents suivants sont cités en référence de manière normative, en intégralité ou en partie, dans le présent document et sont indispensables pour son application. Pour les références datées, seule l'édition citée s'applique. Pour les références non datées, la dernière édition du document de référence s'applique (y compris les éventuels amendements).

CEI 60811-100:2012, *Câbles électriques et à fibres optiques – Méthodes d'essai pour les matériaux non-métalliques – Partie 100: Généralités*

CEI 60811-201, *Câbles électriques et à fibres optiques – Méthodes d'essai pour les matériaux non-métalliques – Partie 201: Essais généraux – Mesure de l'épaisseur des enveloppes isolantes*

CEI 60811-202, *Câbles électriques et à fibres optiques – Méthodes d'essai pour les matériaux non-métalliques – Partie 202: Essais généraux – Mesure de l'épaisseur des gaines non-métalliques*

3 Termes et définitions

Pour les besoins du présent document, les termes et définitions donnés dans la CEI 60811-100 s'appliquent.

4 Méthode d'essai

4.1 Généralités

La présente partie de la CEI 60811 doit être utilisée conjointement avec la CEI 60811-100.

La présente norme décrit la méthode pour réaliser l'essai de pression à température élevée, applicable aux mélanges pour enveloppes isolantes et gaines.

Tous les essais doivent être exécutés au moins 16 h après l'extrusion des mélanges d'isolation et de gainage.

4.2 Appareillage

4.2.1 Etuve à air

L'essai doit être effectué dans une étuve. L'étuve doit fonctionner par circulation d'air naturelle.

NOTE 1 Une circulation d'air forcée ou continue n'est pas exigée. Les étuves équipées de mécanismes de brassage d'air sont susceptibles de provoquer des vibrations.

L'étuve ne doit inclure aucun dispositif susceptible de provoquer des vibrations ni aucun élément de chauffage exposé. La température de l'air doit être maintenue en permanence à la valeur spécifiée dans la norme applicable au câble. L'étuve doit pouvoir fonctionner dans un intervalle de ± 2 K par rapport à la température d'essai spécifiée

NOTE 2 La nécessité de pouvoir contrôler la température à ± 2 K est primordiale. Cela est d'autant plus nécessaire si le matériau en essai est un thermoplastique ayant un changement d'état très rapide à une température proche de son point de fusion tel que certains polymères à base d'éthylène. Pour ce type de matériau, une faible augmentation de la température par rapport à celle spécifiée peut provoquer une importante augmentation de l'empreinte.

En fonctionnement, l'étuve doit être placée à un endroit exempt de vibrations.

4.2.2 Dispositif d'empreinte

Un dispositif conforme à la Figure 1 doit être utilisé. Il doit consister en une lame rectangulaire avec une arête de $(0,70 \pm 0,01)$ mm de largeur qui peut être appuyée contre l'éprouvette sous l'influence d'une force appliquée.

4.3 Enveloppe isolante

4.3.1 Echantillonnage et préparation des éprouvettes

Pour chaque conducteur isolé à essayer, trois tronçons adjacents doivent être prélevés sur un échantillon dont la longueur est comprise entre 250 mm et 500 mm. Chaque tronçon doit avoir une longueur de 50 mm à 100 mm.

De chaque tronçon de conducteur prélevé, on doit retirer mécaniquement tous les revêtements extérieurs éventuels, y compris la couche semi-conductrice externe, si elle existe. Selon le type de câble, l'éprouvette peut avoir une section circulaire, plate ou sectorale. La longueur de l'éprouvette finale doit être de (45 ± 5) mm.

Pour les câbles méplats à conducteurs de type jumelé ou multiple sans gaine, les conducteurs ne doivent pas être séparés individuellement, sauf si la section du conducteur individuel est ≥ 10 mm². Dans ce cas, une éprouvette prélevée sur l'enveloppe isolante d'un conducteur individuel doit être essayée.

L'épaisseur minimale de l'enveloppe isolante à essayer doit être de 0,7 mm.

NOTE Dans certaines circonstances, des essais peuvent être réalisés pour des enveloppes dont l'épaisseur se réduit jusqu'à 0,4 mm, mais ils ne sont pas recommandés. Si des essais sont effectués sur des échantillons dont l'épaisseur est inférieure à 0,7 mm, il convient de le relever dans le rapport d'essai.

4.3.2 Mode opératoire

4.3.2.1 Positionnement des éprouvettes

L'éprouvette finale doit inclure une partie de l'échantillon décrit en 4.3.1.

Les conducteurs circulaires doivent être montés dans la position indiquée par la Figure 1 (3a).

Un câble méplat sans gaine doit être posé du côté de son axe plat/principal.

Les conducteurs sectoraux doivent être montés sur un support de type approprié, comme l'indique la Figure 1 (3b et 3c).

Toutes les éprouvettes doivent être fixées sur le support de manière à ne pas changer de position au cours de l'essai. Des précautions particulières doivent être prises pour les éprouvettes, de manière qu'elles ne plient pas sous la pression de la lame.

4.3.2.2 Application de la force

Une force calculée suivant l'Annexe A doit être exercée perpendiculairement à l'axe du conducteur.

La lame doit également être perpendiculaire à l'axe correspondant.

4.3.2.3 Protocole d'essai dans l'étuve à air

La lame chargée doit être placée sur la pièce d'essai fixée à température ambiante. L'assemblage sera alors placé dans l'étuve à air qui est à la température spécifiée de l'essai.

L'appareil, avec les éprouvettes chargées, doit être placé dans une position exempte de vibration (voir 4.2.1).

La température de l'air doit être maintenue en permanence à la valeur spécifiée dans la norme applicable au câble. En cas de contestation, la température doit être vérifiée au moyen d'un appareil de mesure de température approprié, monté au même niveau que l'éprouvette en essai et aussi près que possible d'une des éprouvettes en essai et la température sera continuellement contrôlée pendant l'essai.

NOTE 1 Il est important de s'assurer que la température ne dépasse à aucun moment la limite supérieure spécifiée pour l'essai du matériel particulier. La température peut passer brièvement en-dessous de la limite inférieure, immédiatement après le début de l'essai. Ces courtes périodes peuvent ne pas être prises en compte.

L'assemblage doit être maintenu en position d'essai pendant la durée spécifiée dans la norme applicable au câble ou, à défaut, pendant le temps suivant:

- 4 h pour les éprouvettes dont $D \leq 15$ mm
- 6 h pour les éprouvettes dont $D > 15$ mm.

NOTE 2 L'Annexe A fournit des détails relatifs à la détermination de la valeur D .

4.3.2.4 Refroidissement

A la fin de la durée spécifiée, l'éprouvette doit être refroidie rapidement sous charge. Cette opération peut être effectuée à l'intérieur ou à l'extérieur de l'étuve, en arrosant l'éprouvette à l'eau froide à l'endroit sur lequel appuie la lame.

L'éprouvette doit être retirée de l'appareil lorsqu'elle est refroidie à une température à laquelle la reprise de l'enveloppe isolante ne doit plus se produire; l'éprouvette doit ensuite être refroidie par immersion dans l'eau froide.

4.3.2.5 Mesure

Immédiatement après refroidissement, l'éprouvette doit être préparée pour déterminer la profondeur de l'empreinte.

L'âme conductrice doit être retirée de manière à obtenir une éprouvette tubulaire.

On doit découper une tranche mince dans l'éprouvette, parallèlement à l'axe du conducteur et perpendiculairement à l'empreinte comme représenté à la Figure 2.

La tranche doit être posée à plat sous un microscope de mesure ou sous un projecteur de mesure, puis le réticule doit être réglé sur le fond de l'empreinte et le côté extérieur de l'éprouvette comme représenté sur la même figure.

Pour les petites éprouvettes, jusqu'à 6 mm de diamètre extérieur, on doit effectuer deux coupes transversales, l'une au droit de l'empreinte et l'autre à proximité comme représenté à la Figure 3, et la profondeur de l'empreinte doit être déterminée par différence entre les mesures au microscope sur les vues en coupe 1 et 2 comme représenté sur la même figure.

Toutes les mesures doivent être exprimées en millimètres avec deux décimales.

NOTE Il convient de prendre des précautions lors de la mesure, car certains facteurs tels que les forces thermomécaniques peuvent déformer la surface supérieure de l'échantillon et donner une position erronée pour le haut de l'empreinte, et la véritable empreinte peut différer de l'empreinte mesurée directement au point d'empreinte. Par conséquent, il est important d'utiliser comme valeur de base la valeur de l'épaisseur mesurée avant l'application du module d'empreinte. S'il semble évident qu'une distorsion a eu lieu, ou en cas d'incertitude sur le résultat, il convient de corriger la valeur d'empreinte en conséquence. Ainsi:

- si l'épaisseur d'origine est égale à δ , mais qu'après l'essai, l'épaisseur apparente est devenue égale à δl , alors pour le calcul, il faut corriger l'empreinte mesurée (désignée par M) en déduisant une valeur égale à $\delta l - \delta$;
- l'empreinte correcte en pourcentage devient alors

$$\frac{M - (\delta l - \delta)}{\delta} \times 100$$

4.3.2.6 Expression des résultats

La valeur des profondeurs d'empreintes, mesurées sur les trois éprouvettes prélevées sur chaque conducteur ou bande, doit être calculée en pourcentage de l'épaisseur d'isolation (comme mesuré conformément à l'Annexe A). La médiane des trois valeurs sera enregistrée. S'il y a des changements de l'épaisseur en raison de l'essai, la formule dans la NOTE de 4.3.2.5 devrait être utilisée.

Pour les câbles méplats, la valeur médiane des profondeurs d'empreintes est la valeur moyenne des valeurs des profondeurs d'empreintes de tous les conducteurs de taille identique dans un échantillon.

NOTE En l'absence de toute exigence dans la norme applicable au câble, une recommandation est indiquée dans l'Annexe B.

4.4 Gaine

4.4.1 Echantillon et préparation des éprouvettes pour les gaines

Pour chaque gaine en essai, trois tronçons adjacents doivent être prélevés sur un échantillon dont la longueur est comprise entre 250 mm et 500 mm et dont les revêtements externes (s'il y a lieu) et tous les éléments internes (conducteurs, bourrages, revêtements internes, armures, etc., s'il y a lieu) ont été retirés.

Chaque tronçon de gaine doit avoir une longueur comprise entre 50 mm et 100 mm.

Dans chaque tronçon de gaine, une bande couvrant environ un tiers de la circonférence, mais ne dépassant pas 20 mm, doit être découpée parallèlement à l'axe du câble si la gaine n'a pas d'empreinte.

Si la gaine présente des empreintes correspondant à cinq conducteurs ou moins, la bande doit être coupée parallèlement aux empreintes de manière qu'elle comporte au moins l'une des empreintes au milieu de sa largeur et sur toute sa longueur.

Si la gaine présente des empreintes résultant de son application sur un assemblage de plus de cinq conducteurs, la bande doit être coupée de la même manière et les empreintes doivent être enlevées par meulage.

NOTE 1 Une machine du type spécifié dans l'Annexe A de la CEI 60811-501:2012 s'est révélée adaptée au meulage ou au découpage des empreintes.

Si la gaine est appliquée directement sur un conducteur concentrique, une armure ou un écran métallique, et présente, par suite, des empreintes qui ne peuvent pas être éliminées par meulage ou coupe (sauf si le diamètre est grand), la gaine ne doit pas être retirée et le tronçon de câble complet doit être utilisé comme éprouvette.

Si les petits côtés d'un câble méplat sont de forme totalement arrondie, cet essai doit être effectué sur l'un des petits côtés. Pour le calcul de la force de compression (voir Annexe A), D représente la dimension minimale du câble et δ l'épaisseur moyenne de la gaine e_3 comme l'indique la Figure 4.

Si les petits côtés sont plats, ou presque plats, comme illustré en Figure 4, une éprouvette doit être préparée en découpant une bande sur le côté large du câble parallèlement à l'axe du câble. Sur la face intérieure, seules les empreintes doivent être enlevées par meulage ou coupe. La largeur de la bande à essayer doit être comprise entre 10 mm et 20 mm. L'épaisseur de la bande doit être mesurée à l'endroit où la force de compression, F , est appliquée.

NOTE 2 Dans certaines circonstances, des essais peuvent être réalisés sur des échantillons dont l'épaisseur se réduit jusqu'à 0,4 mm, mais ils ne sont pas recommandés. Si des essais sont effectués sur des échantillons dont l'épaisseur est inférieure à 0,7 mm, il convient de le relever dans le rapport d'essai.

4.4.2 Mode opératoire

4.4.2.1 Positionnement des éprouvettes

Les bandes doivent être portées par un mandrin métallique qui peut être coupé en deux selon le plan passant par son axe pour former un support plus stable.

NOTE Une broche métallique ou un tube métallique peut servir de mandrin.

Le rayon du mandrin doit être approximativement égal à la moitié du diamètre intérieur de l'éprouvette.

L'appareil, la bande et le mandrin support doivent être disposés de façon que le mandrin supporte la bande et que la lame soit appuyée contre la surface extérieure de l'éprouvette.

Les éprouvettes prélevées sur des gaines de câble méplat doivent être placées sur un support, comme indiqué en Figure 5, lorsque les petits côtés du câble sont plats.

La force doit être appliquée perpendiculairement à l'axe du mandrin (ou du câble lorsqu'un tronçon de câble complet est utilisé) et la lame doit également être perpendiculaire à l'axe du mandrin ou du câble si un câble complet est utilisé.

Si les petits côtés d'un câble méplat sont plats, ou presque plats, comme illustré en Figure 4, l'éprouvette (bande) doit être enroulée autour d'un mandrin dont le diamètre est approximativement égal au diamètre du conducteur du câble; l'axe longitudinal de la bande doit être perpendiculaire à l'axe du mandrin. Des dispositions doivent être prises afin que la surface intérieure de la bande soit en contact avec le mandrin sur un angle minimum de 120 ° de sa circonférence (voir Figure 5). La bande métallique de l'appareil d'essai doit être placée au milieu de l'éprouvette.

Pour les câbles méplats dont les petits côtés sont plats, ou presque plats, δ (en mm) représente l'épaisseur de la bande à l'endroit où la force est appliquée. D (en mm) représente le diamètre du mandrin plus le double de la valeur de δ , comme indiqué en Figure 5.

4.4.2.2 Application de la force

Une force calculée suivant l'Annexe A doit être exercée perpendiculairement à l'axe du mandrin (ou du câble si un câble complet est utilisé).

La lame doit également être perpendiculaire à l'axe correspondant.

4.4.2.3 Protocole d'essai dans une étuve à air

Conformément au 4.3.2.3.

4.4.2.4 Refroidissement

Conformément au 4.3.2.4.

4.4.2.5 Mesure

L'empreinte doit être mesurée sur une bande mince découpée dans l'éprouvette, comme décrit au 4.3.2.5 et représenté à la Figure 2.

Pour les câbles méplats dont les petits côtés sont plats, ou presque plats, la profondeur de l'empreinte doit être reliée à la valeur d'origine, δ , comme décrit au 4.4.2.1 et représenté à la Figure 5.

NOTE Il convient de prendre des précautions lors de la mesure, car certains facteurs tels que les forces thermomécaniques peuvent déformer la surface supérieure de l'échantillon et donner une position erronée pour le haut de l'empreinte, et la véritable empreinte peut différer de l'empreinte mesurée directement au point d'empreinte. Par conséquent, il est important d'utiliser comme valeur de base la valeur de l'épaisseur mesurée avant l'application du module d'empreinte. S'il semble évident qu'une distorsion a eu lieu, ou en cas d'incertitude sur le résultat, il convient de corriger la valeur d'empreinte en conséquence; ainsi:

- si l'épaisseur d'origine est égale à δ , mais qu'après l'essai, l'épaisseur apparente est devenue égale à δI , alors pour le calcul, il faut corriger l'empreinte mesurée (désignée par M) en déduisant une valeur égale à $\delta I - \delta$;
- l'empreinte correcte en pourcentage devient alors:


$$\frac{M - (\delta I - \delta)}{\delta} \times 100$$

4.4.2.6 Expression des résultats

Conformément au 4.3.2.6.

5 Rapport d'essai


Le rapport d'essai doit être conforme aux spécifications de la CEI 60811-100.

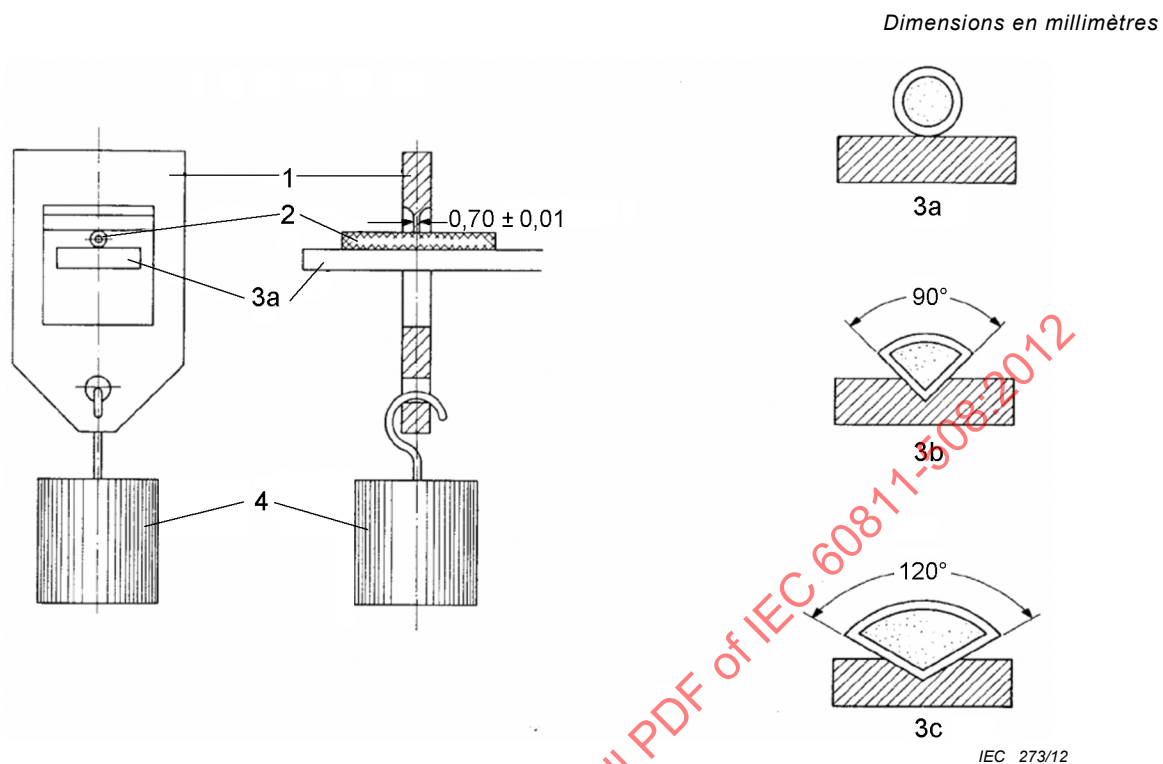

Légende

- | | | | |
|---|----------------|------------|----------|
| 1 | étrier d'essai | 3a, 3b, 3c | supports |
| 2 | échantillon | 4 | charge |

Figure 1 – Dispositif d'empreinte

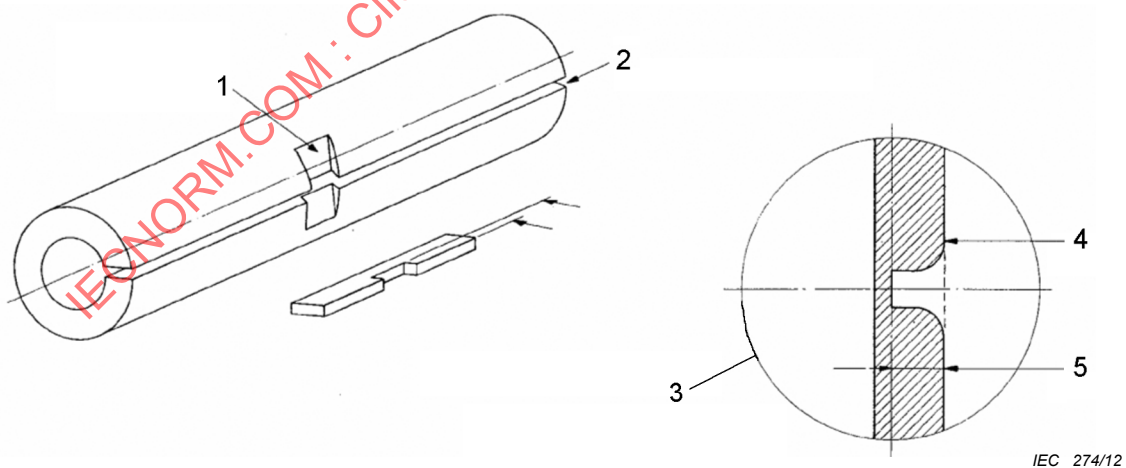

Légende

- | | |
|---|---------------------------------|
| 1 | empreinte |
| 2 | tranche mince à découper |
| 3 | vue en coupe sous le microscope |
| 4 | réticule du microscope |
| 5 | profondeur de l'empreinte |

Figure 2 – Mesure de l'empreinte