

NFPA No.

505

**TYPE DESIGNATIONS,
AREAS OF USE, MAINTENANCE,
& OPERATION OF POWERED
INDUSTRIAL
TRUCKS
1973**



\$1.00

Copyright © 1973

NATIONAL FIRE PROTECTION ASSOCIATION
International

5M-6-73-FP
Printed in U.S.A.

470 Atlantic Avenue, Boston, MA 02210

Official NFPA Definitions

Adopted Jan. 23, 1964; Revised Dec. 9, 1969. Where variances to these definitions are found, efforts to eliminate such conflicts are in process.

SHALL is intended to indicate requirements.

SHOULD is intended to indicate recommendations or that which is advised but not required.

APPROVED means acceptable to the authority having jurisdiction. The National Fire Protection Association does not approve, inspect or certify any installations, procedures, equipment or materials nor does it approve or evaluate testing laboratories. In determining the acceptability of installations or procedures, equipment or materials, the authority having jurisdiction may base acceptance on compliance with NFPA or other appropriate standards. In the absence of such standards, said authority may require evidence of proper installation, procedure or use. The authority having jurisdiction may also refer to the listings or labeling practices of nationally recognized testing laboratories,* i.e., laboratories qualified and equipped to conduct the necessary tests, in a position to determine compliance with appropriate standards for the current production of listed items, and the satisfactory performance of such equipment or materials in actual usage.

*Among the laboratories nationally recognized by the authorities having jurisdiction in the United States and Canada are the Underwriters' Laboratories, Inc., the Factory Mutual Research Corporation, the American Gas Association Laboratories, the Underwriters' Laboratories of Canada, the Canadian Standards Association Testing Laboratories, and the Canadian Gas Association Approvals Division.

LISTED: Equipment or materials included in a list published by a nationally recognized testing laboratory that maintains periodic inspection of production of listed equipment or materials, and whose listing states either that the equipment or material meets nationally recognized standards or has been tested and found suitable for use in a specified manner.

LABELED: Equipment or materials to which has been attached a label, symbol or other identifying mark of a nationally recognized testing laboratory that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling is indicated compliance with nationally recognized standards or tests to determine suitable usage in a specified manner.

AUTHORITY HAVING JURISDICTION: The organization, office or individual responsible for "approving" equipment, an installation, or a procedure.

Statement on NFPA Procedures

This material has been developed in the interest of safety to life and property under the published procedures of the National Fire Protection Association. These procedures are designed to assure the appointment of technically competent Committees having balanced representation from those vitally interested and active in the areas with which the Committees are concerned. These procedures provide that all Committee recommendations shall be published prior to action on them by the Association itself and that following this publication these recommendations shall be presented for adoption to the Annual Meeting of the Association where anyone in attendance, member or not, may present his views. While these procedures assure the highest degree of care, neither the National Fire Protection Association, its members, nor those participating in its activities accepts any liability resulting from compliance or non-compliance with the provisions given herein, for any restrictions imposed on materials or processes, or for the completeness of the text.

Copyright and Republishing Rights

This publication is copyrighted © by the National Fire Protection Association. Permission is granted to republish in full the material herein in laws, ordinances, regulations, administrative orders or similar documents issued by public authorities since the text is tentative at this time. All others desiring permission to reproduce this material in whole or in part shall consult the National Fire Protection Association.

Fire Safety Standard for
Powered Industrial Trucks
Including Type Designations and Areas of Use
NFPA No. 505 — 1973

1973 Edition of No. 505

This Standard for Type Designations, Areas of Use, Maintenance and Operation of Powered Industrial Trucks is published in accordance with action taken at the 1973 Annual Meeting of the National Fire Protection Association, held May 14-18 in St. Louis, MO. It is a complete revision of and supersedes the 1972 edition.

The 1971 edition of this Standard was approved by the American National Standards Institute under date of September 10, 1971 and designated ANSI B56.2. The 1973 edition is being submitted for similar approval. The ANSI designation and date of approval will be printed on the front cover of copies of this edition printed after approval has been received.

Origin and Development of No. 505

Chapter 1 (formerly Part A) of this Standard was originally designated as NFPA No. 505A and was first adopted by the Association in 1951. Chapters 2 and 3 (formerly Parts A and B) "Maintenance of Industrial Trucks" and "Operation of Industrial Trucks" were originally adopted in 1952 and published by the NFPA under the designation NFPA No. 505B and 505C, respectively. Revisions were made in 1955, 1957, 1963, 1965, 1966, 1967, 1968, 1969, 1971, and 1972. 1971 was the first edition to be approved by ANSI.

Committee on Industrial Trucks

Curtis B. Patterson, *Chairman*,

Safety & Fire Protection Div., E. I. duPont de Nemours & Co., Inc., Wilmington, DE 19898

O. S. Carliss, *Secretary*,

Eaton Yale & Towne Inc., Materials Handling Group,
Suite 800, Benjamin Fox Pavilion, Jenkintown, PA 19046
(rep. Industrial Truck Assn.)

Capt. Wm. C. Brouwers, Insurance Com-
pany of North America

Robert P. Day, Factory Insurance Assn.

Charles L. Dean, General Motors Corp.

F. J. Dery, Automobile Manufacturers Assn.,
Inc.

John W. Hippert, Dept. of the Navy

A. C. Miller, Factory Mutual Research Corp.

George H. Pope, Underwriters' Labora-
tories, Inc.

Robert J. Schroeder, Engine Manufac-
turers Assn.

Edward R. Sirotak, Industrial Truck Assn.

Alternates.

E. C. Curtis, Industrial Truck Association
(Alternate to Edward R. Sirotak)

Iwan Jaresko, Factory Insurance Assn.
(Alternate to Robert P. Day)

A. M. Kooiman, Automobile Manufac-
turers Assn., Inc. (Alternate to F. J. Dery)

NOTE: Since the balloting of this report, Robert P. Day, of Factory Insurance Assn., has replaced Curtis B. Patterson as Chairman of this Committee.

This list represents the membership at the time the Committee was balloted on the text of this edition. Since that time, changes in the membership may have occurred.

**Fire Safety Standard for
Powered Industrial Trucks
Including Type Designations and Areas of Use**

NFPA No. 505 — 1973

Notice: An asterisk(*) following the number or letter designating a paragraph indicates explanatory material on that paragraph in Appendix A.

Chapter 1 Type Designations and Areas of Use

1-1 Scope. This standard applies to fork trucks, tractors, platform lift trucks, motorized hand trucks and other specialized industrial trucks powered by electric motors or internal combustion engines. This standard does not apply to compressed air or non-flammable compressed gas-operated industrial trucks, to farm vehicles, or to automotive vehicles for highway use.

1-2 General.

1-2.1 Design and installation of the LP-Gas fuel systems on LP-Gas powered industrial trucks shall be in accordance with the applicable provisions of the *Standard for the Storage and Handling of Liquefied Petroleum Gas, NFPA No. 58-1972; ANSI Z106.1-1972.*

1-2.2 Approved powered industrial trucks as used in this standard are those trucks listed for the use intended, by a nationally recognized testing laboratory. Trucks shall bear a label or some other identifying mark to that effect authorized by such laboratory. The word "listed" herein shall mean compliance with the above.

To prevent confusion all testing laboratories shall use the same type designations to identify the various types of industrial trucks.

1-3* Type Designations. For the purpose of this standard there are eleven different type designations of industrial trucks or tractors as follows:

(a) The *type D* units are diesel powered units having minimal acceptable safeguards against inherent fire hazards.

(b) The *type DS* units are diesel powered units that, in addition to all the requirements for the type D units, are provided with

additional safeguards to the exhaust, fuel and electrical systems.

(c) The *type DY* units are diesel powered units that have all the safeguards of the type DS units, and in addition, do not have any electrical equipment, including ignition. They are equipped with temperature limitation features.

(d) The *type E* units are electrically powered units having minimum acceptable safeguards against inherent fire and electrical shock hazards.

(e) The *type ES* units are electrically powered units that, in addition to all of the requirements for the type E units, are provided with additional safeguards to the electrical system to prevent emission of hazardous sparks and to limit surface temperatures.

(f) The *type EE* units are electrically powered units that have, in addition to all of the requirements for the types E and ES units, the electric motors and all other electrical equipment completely enclosed.

(g) The *type EX* units are electrically powered units that differ from the types E, ES or EE units in that the electrical fittings and equipment are so designed, constructed and assembled that the units may be used in atmospheres containing specifically named flammable vapors, dusts, and, under certain conditions, fibers. Type EX units are specifically tested and classified for use in Class I, Group D or for Class II, Group G hazardous locations as defined in the *National Electrical Code, NFPA No. 70-1971; ANSI C1-1971*.

(h) The *type G* units are gasoline powered units having minimum acceptable safeguards against inherent fire hazards.

(i) The *type GS* units are gasoline powered units that, in addition to all the requirements for the type G units, are provided with additional safeguards to the exhaust, fuel and electrical systems.

(j) The *type LP* units are liquefied petroleum gas powered units having minimum acceptable safeguards against inherent fire hazards.

(k) The *type LPS* units are liquefied petroleum gas powered units that, in addition to the requirements for the type LP units, are provided with additional safeguards to the exhaust, fuel and electrical systems.

1-4 The authority having jurisdiction shall determine the hazard classification of any particular atmosphere or location. The atmosphere or location shall have been classified as to whether it is hazardous or nonhazardous prior to the consideration of industrial trucks being used therein and the type of industrial truck required shall be as provided in Section 1-7 of this standard for such location.

Table 1-7 — Summary Table on Use of Powered Industrial Trucks as Described in Chapter 1 of this Standard

Locations	Diesel-Powered			Electric-Powered				Gasoline-Powered		LP-Gas-Powered		Text Par. Reference
	D	DS	DY	E	ES	EE	EX	G	GS	LP	LPS	
Class I												
Division 1												
Group A												1-7.1
Group B												1-7.1
Group C												1-7.1
Group D							A					1-7.2
Class I												
Division 2												
Group A		X	X		X	X	X		X		X	1-7.9
Group B		X	X		X	X	X		X		X	1-7.9
Group C		X	X		X	X	X		X		X	1-7.9
Group D		A*	A		A*	A	A		A*		A*	1-7.3
Class II												
Division 1												
Group E							A*					1-7.4
Group F							A*					1-7.4
Group G							A					1-7.5
Class II												
Division 2												
Group E		X	X		X	X	X		X		X	1-7.9
Group F		X	X		X	X	X		X		X	1-7.9
Group G		A*	A		A*	A	A		A*		A*	1-7.6
Class III												
Division 1			A			A	A					1-7.7
Class III												
Division 2		A	A	A*	A	A	A		A		A	1-7.8

Key To Table Symbols

A = Type truck authorized in location described.

A* = Type truck authorized in location described with approval of the authority having jurisdiction.

X = Type truck authorized to be determined by the authority having jurisdiction.

Blank spaces = Type truck not authorized in location described.

1-5 Several areas of any one plant or building occasionally have different hazard classifications. The authority having jurisdiction shall limit the use of industrial trucks in hazardous areas in a plant or building in accordance with the hazard classification of such areas. The responsibility for enforcement of restricted use in such areas shall rest on management.

1-6 The industrial trucks specified in Section 1-7 are the minimum types required. Industrial trucks having greater safeguards may be used if desired.

1-7 Specific Areas of Use.

NOTE: Table I provides a summary of industrial truck types for specific areas of use and was developed from information contained in this section.

References in parentheses in the following subsection headings in this Section are to the corresponding classification as used in the *National Electrical Code*, *NFPA No. 70-1971*; *ANSI C1-1971* for the convenience of people familiar with those classifications.

1-7.1 Areas Containing Certain Flammable Gases or Vapors Where Power-Operated Industrial Trucks Shall Not Be Used (Class I, Groups A, B and C, Division 1). Power-operated industrial trucks shall not be used in atmospheres containing hazardous concentrations of acetylene, butadiene, ethylene oxide, hydrogen, manufactured gases containing more than 30 percent hydrogen (by volume), propylene oxide, acetaldehyde, cyclopropane, diethyl ether, ethylene, isoprene, or unsymmetrical dimethyl hydrazine (UDMH).

1-7.2 Atmospheres Where Vapors of Flammable Liquids and Some Gases Exist Under Normal Operating Conditions (Class I, Group D, Division 1).

1-7.2.1 Approved power-operated industrial trucks designated as type EX and classified for Class I, Group D hazardous locations shall be used in atmospheres containing vapors of such flammable liquids or gases as: acetone, acrylonitrile, benzene, butane, ethylene dichloride, gasoline, hexanes, methane, propane, propylene, styrene, vinyl acetate, vinyl chloride, or xylenes in quantities sufficient to produce explosive or ignitable mixtures and where such concentrations of these gases or vapors exist continuously, intermittently or periodically under normal operating conditions or might exist frequently because of repair, maintenance operations, leakage, breakdowns or faulty operation of equipment.

NOTE: For a listing of chemicals of which mixtures of their vapors in air are classified as Class I, Group D, see Table 500-2(c) of the *National Electrical Code*, *NFPA No. 70-1971*; *ANSI C1-1971*.

1-7.2.2 Class I, Group D, Division 1 includes locations where volatile flammable liquids or liquefied flammable gases are transferred from one container to another; interiors of spray booths and areas in the vicinity of spraying and painting operations where volatile flammable solvents are used; locations containing open tanks or vats of volatile flammable liquids; drying rooms or compartments for the evaporation of flammable solvents; locations containing fat and oil extraction apparatus using volatile flammable solvents; portions of cleaning and dyeing plants where hazardous liquids are used; gas generator rooms and other portions of gas manufacturing plants where flammable gas may escape; inadequately ventilated pump rooms for flammable gas or for volatile flammable liquids; the interiors of refrigerators and freezers in which volatile flammable materials are stored in open, lightly stoppered, or easily ruptured containers; and all other locations where hazardous concentrations of flammable vapors or gases are likely to occur in the course of normal operations.

1-7.3 Atmospheres Where Volatile Flammable Liquids and Their Vapors or Flammable Gases Are Normally Confined (Class I, Group D, Division 2).

1-7.3.1 Approved power-operated industrial trucks designated as types DY, EE or EX (classified for Class I, Group D hazardous locations) shall be used in locations where volatile flammable liquids or flammable gases are handled, processed or used, but in which the hazardous liquids, vapors or gases will normally be confined within closed containers or closed systems from which they might escape only in case of accidental rupture or breakdown of such containers or systems, or in case of abnormal operation of equipment; also in locations in which hazardous concentrations of gases or vapors are normally prevented by positive mechanical ventilation but which might become hazardous through failure or abnormal operation of the ventilating equipment; or in locations which are adjacent to Class I, Division 1 locations, and to which hazardous concentrations of gases or vapors might occasionally be communicated unless such communication is prevented by adequate positive-pressure ventilation from a source of clean air, and effective safeguards against ventilation failure are provided.

1-7.3.2 In locations used for the storage of hazardous liquids in sealed containers or liquefied or compressed flammable gases in containers, approved power-operated industrial trucks designated as types DS, ES, GS or LPS may be used if permitted for such location by the authority having jurisdiction.

1-7.3.3 The classification Class I, Group D, Division 2 includes locations where volatile flammable liquids or flammable gases or vapors are used, but which, in the judgment of the authority having jurisdiction, would become hazardous only in case of an accident or of some unusual operating condition. The quantity of hazardous material that might escape in case of accident, the adequacy of ventilating equipment, the total area involved, and the record of the industry or business with respect to explosions or fires are all factors that should receive consideration in determining whether or not the DS, DY, ES, EE, GS, LPS type truck possesses sufficient safeguards for the location.

1-7.4 Atmospheres Containing Metal Dusts, Carbon Black, Coke or Coal Dust (Class II, Groups E and F, Division 1).

1-7.4.1 Power-operated industrial trucks shall not be used in atmospheres containing hazardous concentrations of metal dust, including aluminum, magnesium, and their commercial alloys, other metals of similarly hazardous characteristics, or in atmospheres containing carbon black, coal or coke dust.

Exception: Approved power-operated industrial trucks designated as type EX may be used in such atmospheres subject to special investigation by the authority having jurisdiction.

1-7.4.2 In atmospheres where dust of magnesium, aluminum or aluminum bronze might be present, fuses, switches, motor controllers and circuit breakers of trucks shall have enclosures specifically approved for such locations.

1-7.5 Atmospheres Containing Combustible Dusts in Suspension Other Than Those Specified in 1-7.4 (Class II, Group G, Division 1).

1-7.5.1 Approved power-operated industrial trucks designated as EX (classified for Class II, Group G, hazardous locations) shall be used in atmospheres in which combustible dust is or may be in suspension continuously, intermittently or periodically under normal operating conditions, in quantities sufficient to produce explosive or ignitable mixtures, or where mechanical failure or abnormal operation of machinery or equipment might cause such mixtures to be produced.

1-7.5.2 The classification Class II, Group G, Division 1 includes the working areas of grain handling and storage plants, rooms containing grinders or pulverizers, cleaners, graders, scalpels, open conveyors or spouts, open bins or hoppers, mixers or blenders, automatic or hopper scales, packing machinery, elevator heads and boots, stock distributors, dust and stock collectors (except all-

metal collectors vented to the outside), and all similar dust producing machinery and equipment in grain processing plants, starch plants, sugar pulverizing plants, malting plants, hay grinding plants, and other occupancies of similar nature where combustible dust might, under normal operating conditions, be present in the air in quantities sufficient to produce explosive or ignitable mixtures.

1-7.6 Locations Where Combustible Dusts Are Present But Not Normally in Suspension in the Atmosphere (Class II, Group G, Division 2).

1-7.6.1 Approved power-operated industrial trucks designated as type DY, EE or EX (classified for Class II, Group G hazardous locations) shall be used in atmospheres in which combustible dust is not normally in suspension in the air or is not likely to be thrown into suspension by the normal operation of equipment or apparatus in quantities sufficient to produce explosive or ignitable mixtures but where deposits or accumulations of such dust might be ignited by arcs or sparks originating in the truck.

1-7.6.2 In locations where dangerous concentrations of suspended dust would not be likely, approved power-operated industrial trucks designated as types DS, ES, GS or LPS may be used if permitted for such location by the authority having jurisdiction. These locations would include rooms and areas containing only closed spouting and conveyors, closed bins or hoppers, or machines and equipment from which appreciable quantities of dust would escape only under abnormal operating conditions; rooms or areas into which explosive or ignitable concentrations of suspended dust might be communicated only under abnormal operating conditions; rooms or areas where the formation of explosive or ignitable concentrations of suspended dust is prevented by the operation of effective dust control equipment; warehouses and shipping rooms where dust producing materials are stored or handled only in bags or containers and other similar locations.

1-7.7 Locations Where Ignitable Fibers Are Processed (Class III, Division 1).

1-7.7.1 Approved power-operated industrial trucks designated as types DY, EE or EX shall be used in locations which are hazardous because of the presence of easily ignitable fibers or flyings but in which such fibers or flyings are not likely to be in suspension in the air in quantities sufficient to produce ignitable mixtures.

1-7.7.2 Locations where easily ignitable fibers or flyings are found usually include some parts of rayon, cotton, and other textile mills; combustible fiber manufacturing and processing plants;

cotton gins and cotton-seed mills; flax processing plants; clothing manufacturing plants; and establishments and industries involving similar hazardous processes or conditions. Woodworking plants (except wood flour mills) shall not be considered as being in the type of locations defined in 1-7.7.

1-7.8 Locations Where Ignitable Fibers Are Stored (Class III, Division 2).

1-7.8.1 Approved power-operated industrial trucks designated as types DS, DY, ES, EE, EX, GS or LPS shall be used in locations where easily ignitable fibers are stored or handled, including outside storage, but are not being processed or manufactured. Industrial trucks designated as type E, which have been previously used in these locations may be continued in use with the approval of the authority having jurisdiction.

1-7.8.2 Easily ignitable fibers and flyings include rayon, cotton (including cotton linters and cotton waste), sisal or henequen, istle, jute, hemp, tow, cocoa fiber, oakum, baled waste kapok, Spanish moss, excelsior, and other materials of similar nature.

1-7.9 Hazardous Locations Not Otherwise Classified. The authority having jurisdiction shall determine what types of power-operated industrial truck, if any, shall be used based on an engineering survey of the property and an evaluation of the fire and explosion hazards.

1-7.10 Piers and Wharves.

1-7.10.1 When determined that the location on piers and wharves for handling general cargo is not hazardous, any approved power-operated industrial truck designated as type D, E, G, or LP may be used, or trucks which conform to the requirements for these types may be used.

1-7.10.2 Where an area of a pier or wharf is determined to be hazardous, only approved power-operated industrial trucks specified for such locations in the preceding subsections shall be used.

1-7.11 General Inside and Outside Storage.

1-7.11.1 When determined that the location for general storage in warehouses or general outside storage is not hazardous, any approved power-operated industrial truck designated as type D, E, G, or LP may be used or trucks which conform to the requirements for these types may be used.

1-7.11.2 Where the location for general storage in warehouses or general outside storage is determined to be hazardous, only approved power-operated industrial trucks specified for such locations in the preceding subsections shall be used.

1-7.12 General Industrial or Commercial Properties.

1-7.12.1 When determined that the location on general industrial or commercial properties for handling or processing materials (storage being incidental to handling and processing), or both is not hazardous, any approved power-operated industrial truck designated as type D, E, G, or LP may be used, or trucks which conform to the requirements for these types may be used.

1-7.12.2 Where the location on general industrial or commercial properties for handling or processing materials, or both is determined to be hazardous, only approved power-operated industrial trucks specified for such locations in the preceding subsections shall be used.

1-7.13 Converted Industrial Trucks. Power-operated industrial trucks that have been originally approved for the use of gasoline for fuel and designated as type G or GS, when converted to the use of liquefied petroleum gas fuel in accordance with Chapter 2 (*see* 2-8), may be used in those locations where G, GS or LP and LPS type trucks have been specified in the preceding subsections.

Chapter 2 Maintenance of Industrial Trucks

2-1 General. It is essential that the fire safety built into power-operated industrial trucks be maintained; any power-operated industrial truck not in safe operating condition shall be removed from service.

2-2 Precautions.

2-2.1 Repairs shall not be made in Class I, II and III locations.

2-2.2 Repairs to the fuel and ignition systems of industrial trucks which involve fire hazards shall be conducted only in locations designated for such repairs.

2-2.3 Designated areas shall be protected in accordance with the NFPA *Standard for Repair Garages* (NFPA No. 88B-1973).

2-2.4 Repairs to the electrical system of battery-powered industrial trucks shall be performed only after the battery has been disconnected.

2-3 All parts of any industrial truck requiring replacement shall be replaced only with parts providing the same degree of fire safety as those used in the original design.

2-4 Water mufflers shall be filled daily or as frequently as is necessary to prevent depletion of the supply of water below 75 percent of the filled capacity. Vehicles with mufflers having screens or other parts that may become clogged shall not be operated while such screens or parts are clogged. Any vehicle that emits hazardous sparks or flames from the exhaust system shall immediately be removed from service, and not returned to service until the cause for the emission of such sparks and flames has been eliminated.

2-5 When the temperature of any part of any truck is found to be in excess of its normal operating temperature and which creates a hazardous condition, the vehicle shall be removed from service and not returned to service until the cause for such overheating has been eliminated.

2-6 Industrial trucks shall be kept in a clean condition, reasonably free of lint, excess oil, and grease. Noncombustible agents are preferred for cleaning trucks. Low flash point (below 100°F) solvents shall not be used. High flash point (at or above 100°F) solvents may be used. Precautions regarding toxicity, ventilation, and fire hazard shall be consonant with the agent or solvent used.

2-7 When antifreeze is required in the engine cooling system, only glycol base material shall be used.

2-8* Industrial trucks originally approved for the use of gasoline for fuel may be converted to liquefied petroleum gas fuel provided the complete conversion results in a truck which embodies the features specified for LP or LPS designated trucks. The authority having jurisdiction shall require that the conversion equipment is "Listed by Report" by a recognized testing laboratory.¹

2-9 The truck designations (see Section 1-3) as shown on the nameplate and the Type markers (see 3-3.2) shall not be painted over so as to obscure their content.

¹The description of the component parts of this conversion system and the recommended method of installation on specific trucks are contained in the "Listing by Report" available for the use of the authority having jurisdiction. (See 1-7.13.)

Chapter 3 Fueling, Recharging and Marking of Industrial Trucks

3-1 Fuel Handling and Storage.

3-1.1 Liquid Fuels (such as Gasoline and Diesel Fuel).

3-1.1.1 The storage and handling of liquid fuels shall be in accordance with the *Flammable and Combustible Liquids Code, NFPA No. 30-1973*.

3-1.1.2 Trucks using liquid fuels shall be refueled only at locations designated for that purpose and from approved dispensing pumps. Safe outdoor locations are preferable to those indoors. The *Flammable and Combustible Liquids Code NFPA No. 30-1973*, (paragraph 7312) outlines recommendations for arranging safe indoor fueling facilities.

3-1.1.3 Engines shall be stopped and operator off the truck during refueling.

3-1.1.4 Emergency refueling shall be from approved safety cans. Safety cans shall be inspected regularly for damage to closures and for leaks; faulty cans shall be replaced.

3-1.1.5 Spillage of fuel or overfilling the vehicle fuel tank shall be avoided.

3-1.1.6 Smoking shall be prohibited in the refueling area.

3-1.2 Liquefied Petroleum Gas Fuel.

3-1.2.1 The storage and handling of liquefied petroleum gas (LP-Gas) shall be in accordance with the *Standard for Storage and Handling of Liquefied Petroleum Gases, NFPA No. 58-1972; ANSI Z106.1-1972*.

3-1.2.2 Filling of fuel containers which are permanently mounted on trucks and the filling of removable DOT type LP-Gas containers shall be done at locations designated for that purpose and in accordance with the *Standard for Storage and Handling of Liquefied Petroleum Gases, NFPA No. 58-1972; ANSI Z106.1-1972*.

3-1.2.3 LP-Gas container shall not be dropped, thrown, rolled or dragged.

3-1.2.4 LP-Gas containers shall not be overfilled.

3-1.2.5 The engine shall be stopped and operator off the truck during refueling.

3-1.2.6 Trained and designated personnel shall refill or exchange LP-Gas containers.

3-1.2.7 A soap solution shall be used to check for leaks. A match or open flame shall not be used.

3-1.2.8 Removable LP-Gas containers shall not be exchanged and LP-Gas powered vehicles shall not be parked near sources of heat, open flames, or similar sources of ignition, or near open pits, underground entrances, elevator shafts or other similar areas unless such areas are adequately ventilated to prevent accumulations of LP-Gas.

3-1.2.9 Trucks equipped with permanently mounted LP-Gas containers shall be refueled outdoors.

3-1.2.10 The exchange of removable LP-Gas containers is preferably done outdoors, but may be done indoors. Means shall be provided in the fuel system to minimize the escape of fuel when the containers are exchanged. This shall be accomplished by:

- (a) Closing the valve on the LP-Gas container, and
- (b) Using an approved automatic quick-closing coupling (a type which closes in both directions, when uncoupled) in the fuel line. Where such an automatic quick-closing coupling is not used the fuel line shall be emptied by allowing the engine to run until the fuel in the line is consumed.

3-1.2.11 Removable LP-Gas containers shall be securely mounted to prevent jarring loose, slipping, or rotating, and shall be so positioned that the safety pressure relief valve opening is always in contact with the vapor space (top) of the container. This is accomplished by an indexing pin and container clamp(s) which, when the container is properly installed, positions the container.

3-1.2.12 All reserve LP-Gas containers shall be stored and transported with the service valve closed. Safety relief valves shall have direct communication with the vapor space of the container at all times.

3-1.2.13 All LP-Gas containers shall be examined before refilling for the following defects or damage:

- (a) Dents, scrapes, and gouges of the pressure vessel
- (b) Damage to the various valves and liquid level gage

- (c) Debris in the relief valve
- (d) Damage to or loss of relief valve cap
- (e) Indications of leakage at valves or threaded connections
- (f) Deterioration damage or loss of flexible seals in the fill or servicing connections.

Where examination reveals physical damage, such as dents, scrapes or gouges (item a) which materially weaken the structure of the LP-Gas container, rendering it unsafe for use, it shall be removed from service.

Where examination reveals damages listed above (items b through f) other than physical damage to the container, appropriate repairs shall be made before the container is refilled.

3-1.2.14 Smoking shall be prohibited in the container refilling area for either portable or permanently mounted containers and in the exchange area when exchanging LP-Gas containers.

3-1.2.15 The service valve of the fuel container shall be closed whenever vehicles are parked overnight or stored for protracted periods of time indoors.

3-2 Changing and Charging Storage Batteries

3-2.1 This section shall apply to batteries used on electric trucks. The two types of batteries in common use are (a) lead and (b) nickel-iron. They contain corrosive chemical solutions, either acid or alkali, and therefore present a chemical hazard. On charge, they give off hydrogen and oxygen, which in certain concentrations, are explosive.

3-2.2 Battery-charging installations shall be located in areas designated for that purpose. Facilities shall be provided for flushing and neutralizing spilled electrolyte; for fire protection; for protecting charging apparatus from damage by trucks and for adequate ventilation for dispersal of fumes from gassing batteries.

3-2.3 When handling acid concentrates greater than 50 percent acid (above 1.400 specific gravity) an eye wash fountain shall be provided.

3-2.4 A conveyor, overhead hoist, or equivalent material handling equipment shall be provided for handling batteries.

3-2.5 Chain hoists shall be equipped with load-chain containers. When hand hoist is used, uncovered batteries shall be covered with a sheet of plywood or other nonconducting material

to prevent the hand chain from shorting on cell connectors or terminals. A properly insulated spreader bar shall be used with any overhead hoist.

3-2.6 Reinstalled batteries shall be properly positioned and secured in the truck.

3-2.7 A carboy tilter or siphon shall be provided when acid in carboys is used. When sulfuric acid of more than 50 percent concentration is being diluted, *always* add the acid to the water and not the water to the acid. Personnel maintaining batteries shall wear protective clothing such as eye protection, long sleeves and gloves.

3-2.8 Electrical installations shall conform to the *National Electrical Code*, *NFPA No. 70-1971*; *ANSI C1-1971* and any local ordinances.

3-2.9 Trained and authorized personnel shall change or charge batteries.

3-2.10 Trucks shall be properly positioned and brake applied before attempting to change or charge batteries.

3-2.11 When charging batteries, the vent caps shall be kept in place to avoid electrolyte spray. Care shall be taken to assure that vent caps are functioning. The battery (or compartment) cover(s) shall be open to dissipate heat.

3-2.12 Smoking shall be prohibited in the charging area.

3-2.13 Precautions shall be taken to prevent open flames, sparks, or electric arcs in battery charging areas.

3-2.14 Tools and other metallic objects shall be kept away from the top of uncovered batteries.

3-3 Use of Trucks in Hazardous Areas.

3-3.1 Industrial trucks shall not be used in hazardous areas except as specified in Chapter 1 of this standard.

3-3.2 Markings of Types DS, DY, ES, EE, EX, GS and LPS Industrial Trucks and Areas of Use.

3-3.2.1 The use of proper equipment in hazardous areas is essential for the safety and protection of employees and property. Approved trucks, listed by a nationally recognized testing laboratory for use in such areas shall be clearly identified. To facilitate

identification by both operators and supervisory personnel, a uniform system of marking has been developed as described herein.

3-3.2.2 Durable markers indicating the designation of type of truck shall be applied to each side of the vehicle in a visible but protected location. These markers are distinctive in shape as indicated in Figure 3-3.2.2.

3-3.2.3 Entrances to hazardous areas shall be posted with large durable markers of corresponding shape as shown in Figure 3-3.2.3.

3-3.2.4 Suitable markers may be obtained from NFPA, 470 Atlantic Avenue, Boston, Massachusetts 02210, at nominal prices.

3-4 Safe Operating Rules. This standard primarily concerns powered industrial truck fire safety. For safe operating rules, see the *American National Standard Safety Code for Powered Industrial Trucks, ANSI B56.1-1969*.

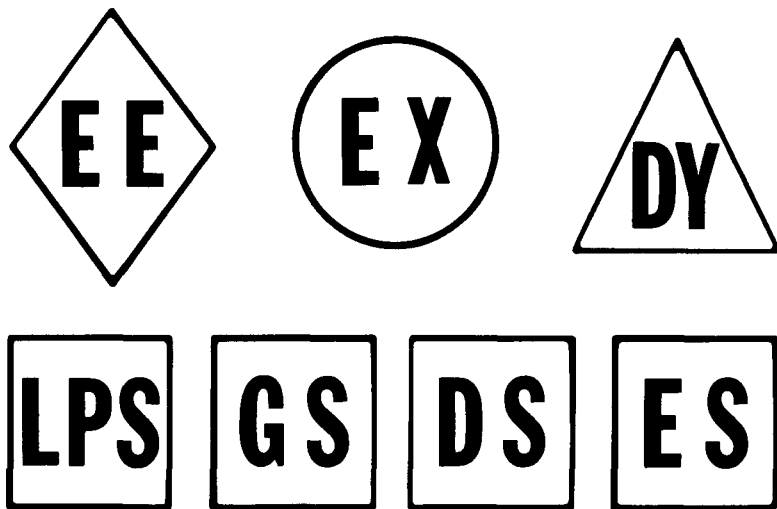


Figure 3-3.2.2 Markers to identify type of industrial truck. The markers for LPS, GS, DS, and ES are 4 inches square. The width of the others is 5 inches.

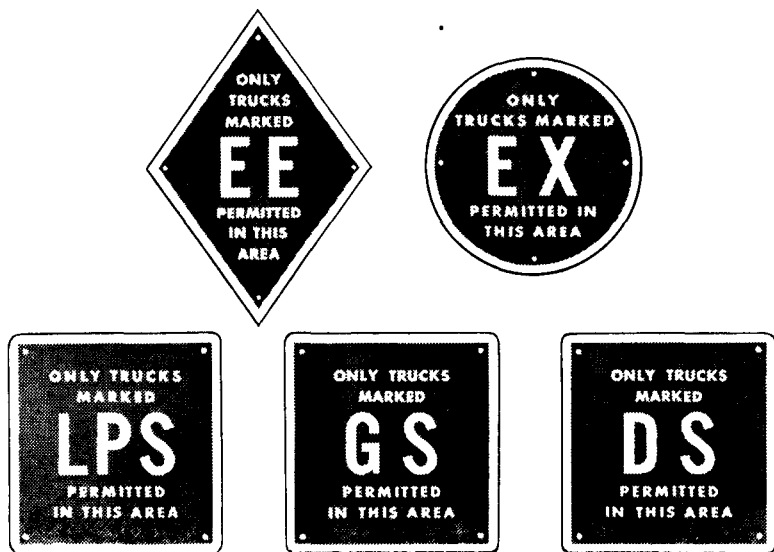


Figure 3-3.2.3 Building signs for posting at entrances to hazardous areas. The width of each is 11 inches. Building signs for Type DY and ES may be produced on demand.